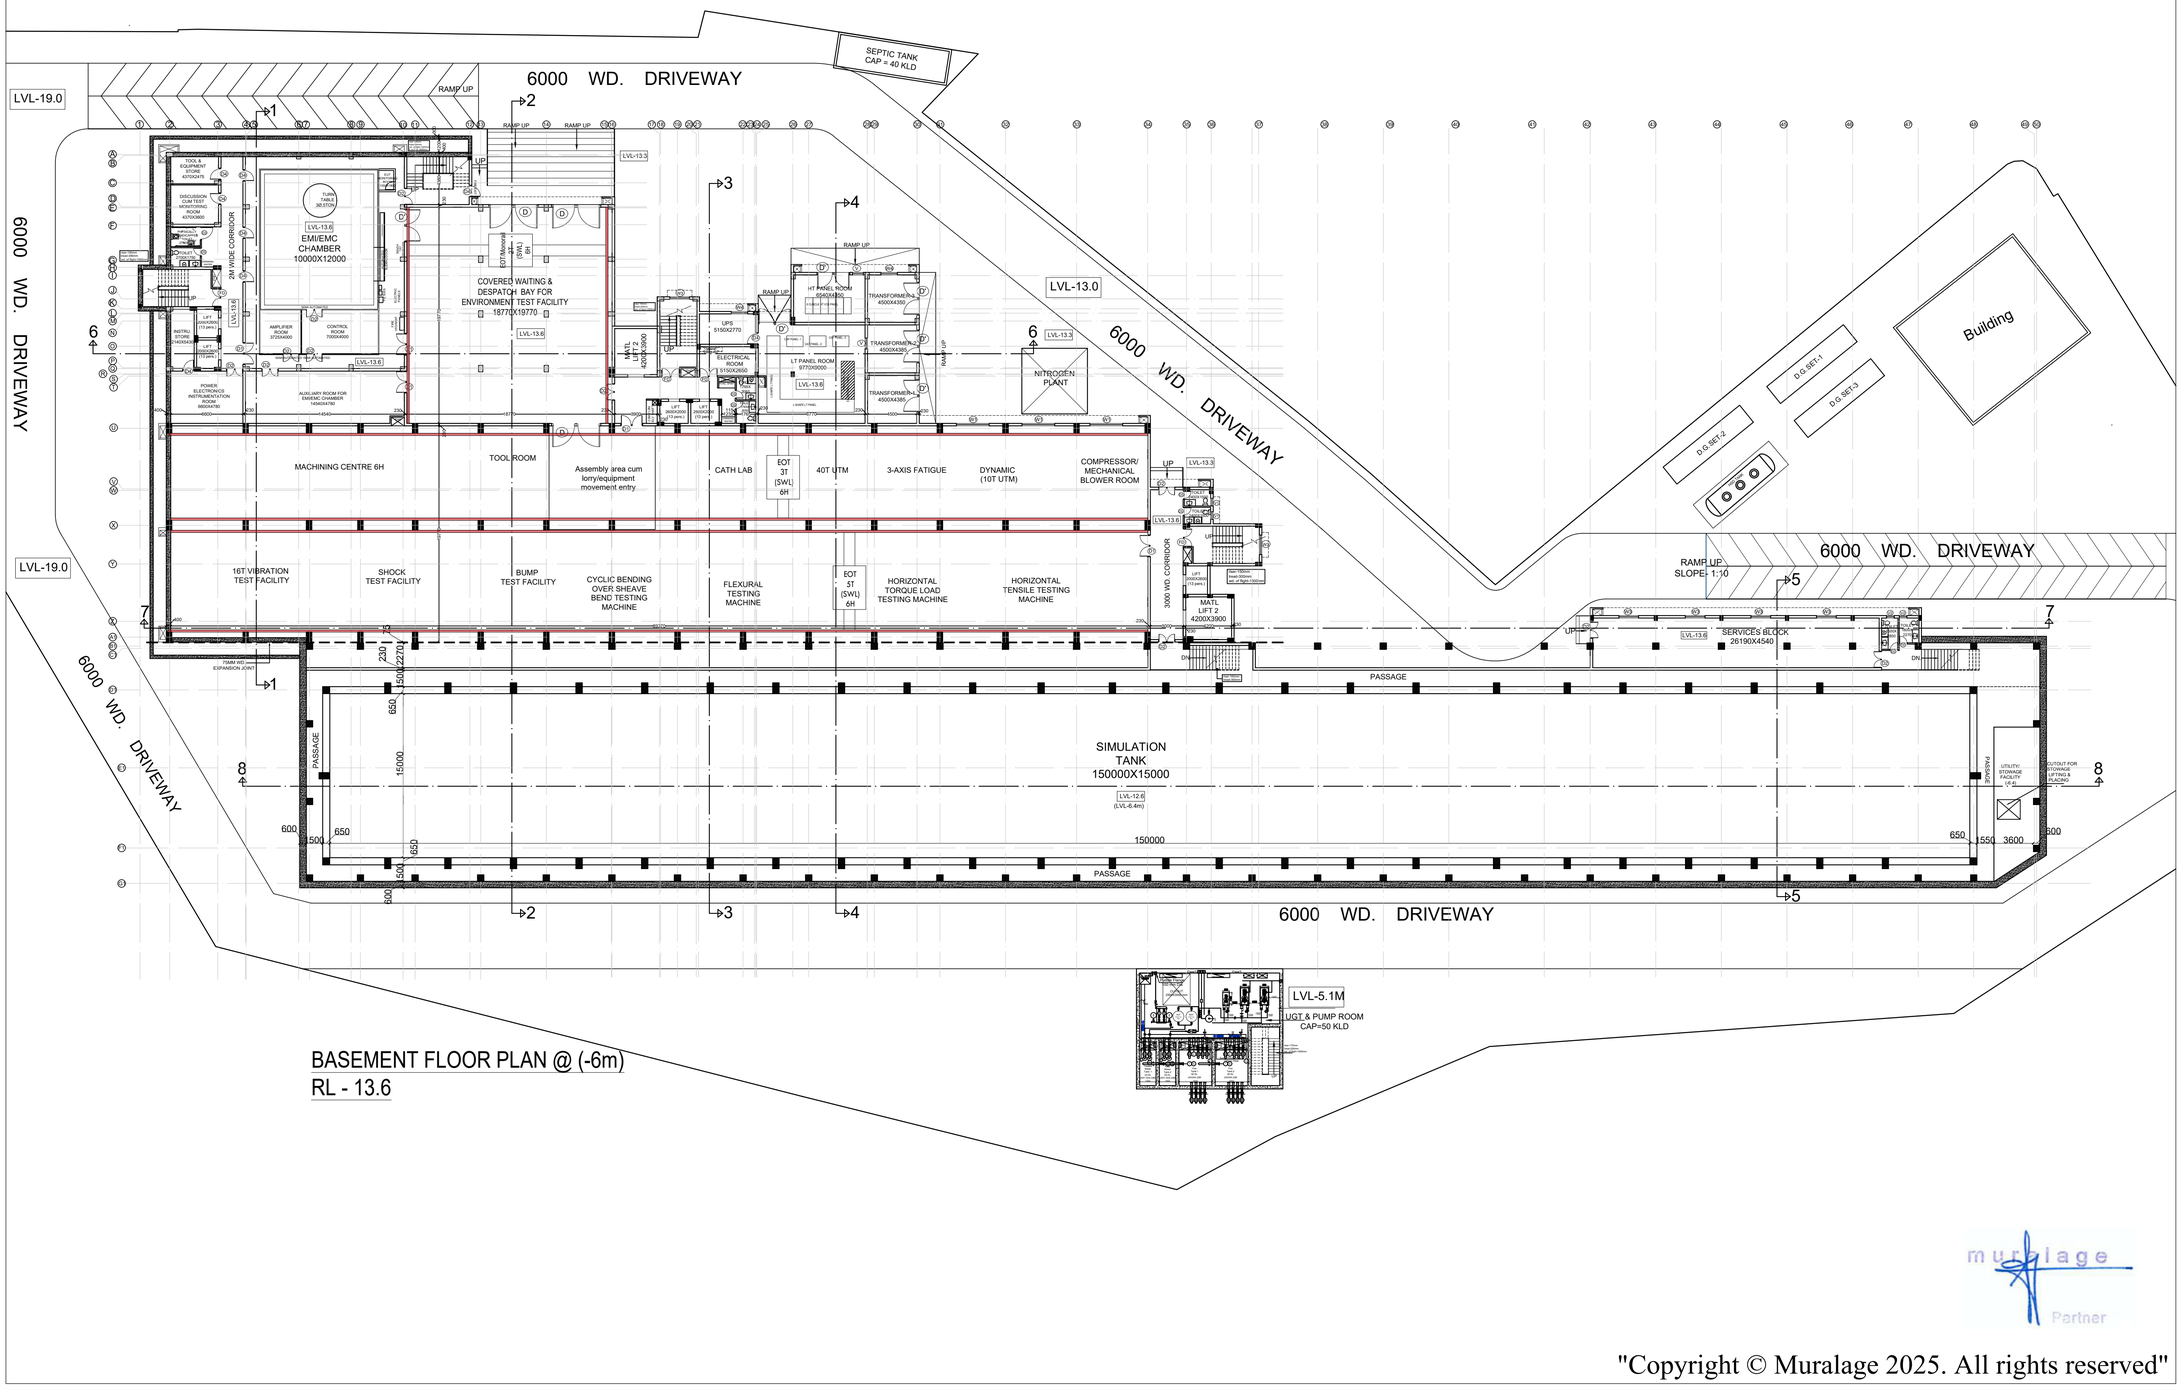


BASEMENT FLOOR PLAN @ (-6m)
RL - 13.6

PROVISION OF TECHNICAL BUILDING WITH UNDERWATER SIMULATION CHANNEL FACILITY FOR PROJECT SEATEC

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN SHALL NOT BE DISCLOSED, REPRODUCED OR USED FOR ANY PURPOSE BY ANY PERSON WITHOUT THE EXPRESS WRITTEN CONSENT OF M/S MURALAGE. THIS DRAWING IS PROTECTED UNDER COPYRIGHT LAW AND ANY COPYING OR REPRODUCTION HEREOF IS PROHIBITED. UNAUTHORISED PERSONS FOUND COPYING THIS DRAWING OR ANY PART OF THIS DOCUMENT OR USING THE SAME FOR ANY PURPOSE SHALL BE SUBJECT TO LEGAL ACTION.

SCHEDULE OF DOOR, WINDOWS AND VENTILATORS

S.NO.	TYPE	WIDTH	HEIGHT	SILL	LINTEL
DOORS :					
1.	FD	1650	2100/2400	00	2400/2100
2.	D	4500	5400	00	Beam Bottom
3.	D'	3000	3400	00	Beam Bottom
4.	D1	2000	2400	00	2400
5.	D2	1500	2400	00	2400
6.	D3	1200	2400	00	2400
7.	D4	1050	2400	00	2400
8.	D5	750	2100	00	2100
10	GL	3600	7400	00/200	Beam Bottom
WINDOWS :					
1.	W1	3000	1500	900	2400
2.	W2	2400	1500	900	2400
3.	W3	1800	1500	900	2400
4.	FG	1800	1500	900	2400(D.G.U.)
5.	W4	1500	1500	900	2400
6.	W5	1350	1350	1050	2400
7.	W6	700	1500	900	2400
VENTILATOR :					
1.	V1	700	900	1500	2400
2.	V2	600	900	1500	2400

AREA STATEMENT

A.Technical building

1- Basement Floor covered area	-	2987.00 sqm
2- Basement mezzanine covered area	-	312.00sqm
3- Ground Floor covered area	-	2690.00 sqm
4- Ground mezzanine covered area	-	700.00 sqm
5- First Floor covered area	-	2525.00 sqm
6- Second Floor covered area	-	2499.00 sqm
7- Third Floor covered area	-	2499.00 sqm
		=14213.00 sqm
B. SUB STATION	-	205.00 sqm
Total covered area of all floors	-	14417.00 sqm

B. Simulation Tank

1- Underground Simulation Channel Size - 150mX15mX8.50m		
2-Covered Shed over Simulation Channel in PEB	-	3372.00sqm
3- Services Block	-	142.50 sqm
4- Measurement Room	-	52.50 sqm
Total covered area	-	3567.00 sqm

EXECUTED BY	USER
CCE (R&D) South, Secunderabad, DRDO	NPOL, KOCHI, DRDO

CONSULTANT :
m u r a l a g e
architecture , master planning , interior design
conservation , landscaping , project management
A-3/269 , vibhav khand , gomti nagar , lucknow
phone no.. : 2980139, 2320715

DRAWING TITLE
TECHNICAL BUILDING

PROPOSAL DRAWING
BASEMENT FLOOR PLAN LVL -13.6

REFERENCE NO.	D-66
SHEET NO :	AR-TB-01
SCALE :	1:300
DATE :	DEC' 2025
DRAWN BY :	Neeru Verma

muralage Partner

"Copyright © Muralage 2025. All rights reserved"