Sales Quotation

Quotation No - SQT/19-20/1789 R 1 **Date : 22/07/2019**

KIGFA Science and Technology India Ltd.
208,2nd Floor,Gera Garden II, 7A Koregaon Park
Pune -411001

Kind Attn: Mr.Vivek Thigle
Email: vivekt@kingfaindia.com
Contact No : 9028812358

Project Name And Location :

Subject : Quotation for NIHVA Make Dock Leveller


Dear Sir

Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication; please find below our best offer.

Commercial Offer

Sr.No	Description	Qty	Unit	Rate In INR	Net Amount INR
A	**Dock Leveler (NIHVA Make)** **Capacity : 9 Ton** **Dock Operation Mode : AC powerpack Hydraulically Operated** **Lip Size (W x L) : 2000 mm x 400 mm** **Dock Leveller (Shut)Height : 480 mm** **Working Length : 2900 mm** **Deck Plate (MS Chequered) 8 mm Thick** **Lip Plate : 16 mm Thick** **No.of Deck Cylinder : 2** **Lip Cylinder : 1**				
1	**Dock Levelers Capacity 9 Ton** Size : (W) 2000 mm X (H) 2500 mm (Supply + Installation)	6	Nos.	**195,000**	**1,170,000**
	Total				1,170,000

Dock Leveler Image & Technical Specifications

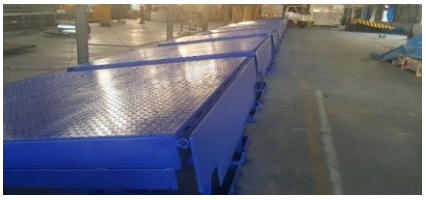



GST Pune	**27AAECN0437H1ZM**

HSN Code: 84289090 SAC: 998732

General Prerequisites Required at Site

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery
4. Loading and Unloading will be in NIHVA Scope
5. Scaffolding require for Installation it is in NIHVA scope.

Limit of Supply

1. Provide place to store the material to be installed .
2. Be responsible for the safe custody of all material.
3. Provide place to safely store all the tools of installation

The supply included only those mentioned in the quote & does not include

1. Electrical connection for control panel.

Client Scope

1. Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope
3. All structure support is in NIHVA scope
4. NIHVA Will provided structure drawing
5. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

Terms and Conditions :

1	**Price**	:	Ex. Works Pune
2	**P & F Charges**	:	Nil
3	**Freight Notes**	:	Inclusive
4	**Delivery**	:	5 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5	**Payment**	:	30% Advance along with Confirmed Purchase Order & 50% after Readiness of mateial before dispatch, 20% After Installation - 5 % PBG for 12 months from the date of delivery
6	**Insurance**	:	NA
7	**Taxes**	:	GST Extra @ 18%
8	**Validity**	:	Validity of Offer is 15 days from the date of quotation
9	**Warranty**	:	12 months from the date of supply.

Please feel free to Contact **Mr. Bhavin Jain** on **8551092333** For any further Clarification /Information in this Concern.

With Best Regards
Smita Khare
9637991333
For NIHVA Technologies Pvt Ltd