

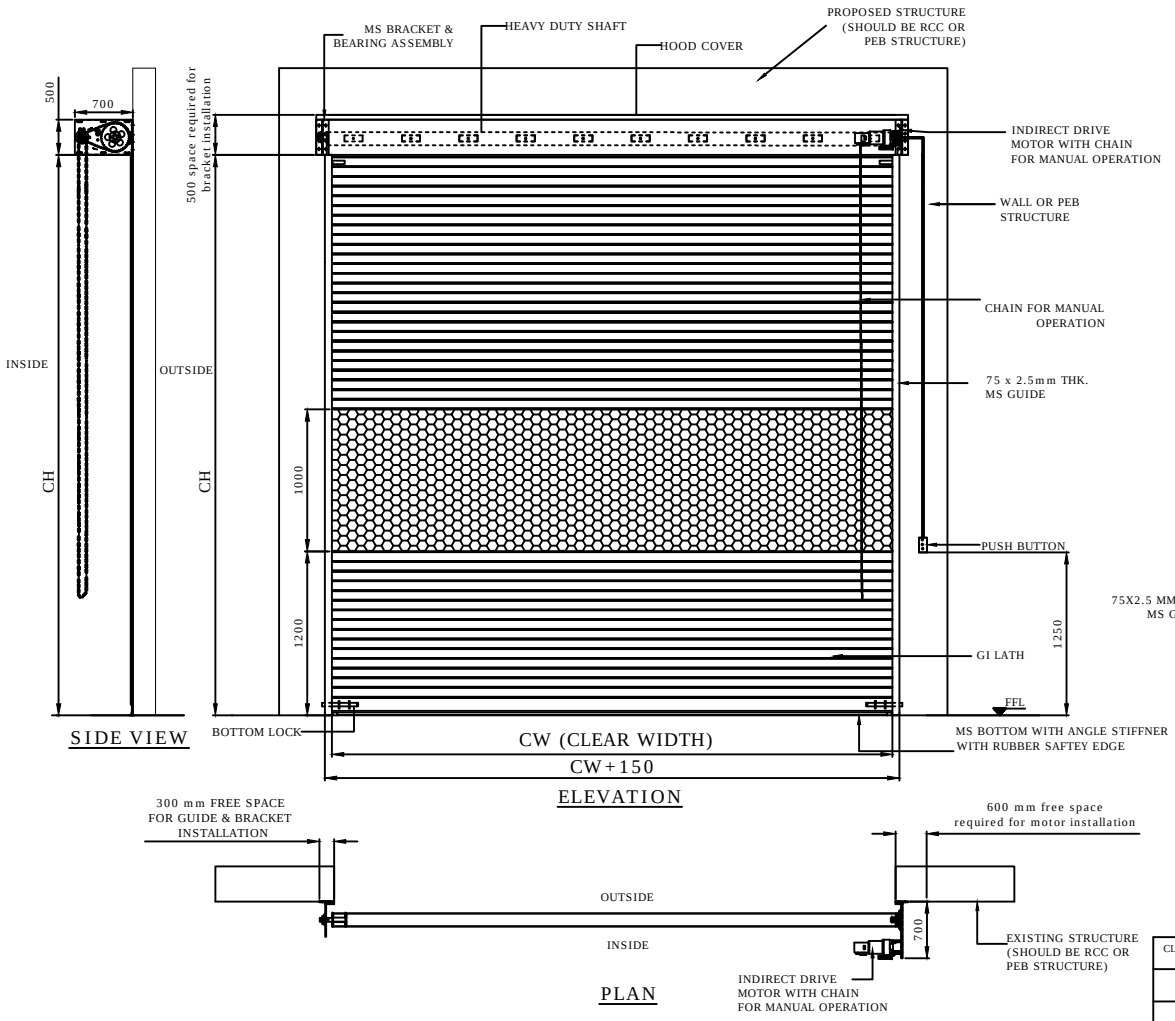


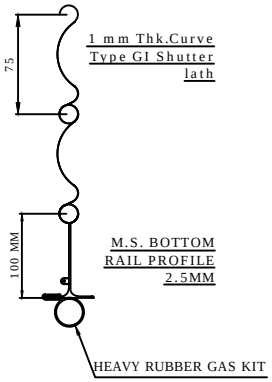

M.S. BOTTOM RAIL PROFILE 2.5MM

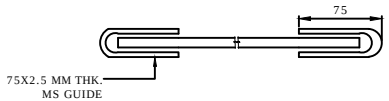

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY	LOCATION
2500	4000	01 NOS	RAW WATER TANK & WTP PUMP HOUSE HOUSING COLONY
3000	4000	01 NOS	FIRE WATER CUM WTR PUMP HOUSE FACTORY AREA

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
2500	4000	01 NOS
3000	4000	01 NOS

MATERIAL:

THICKNESS :

NOTE:
1.REQUIRED STRUCTURE FOR ROLLING SHUTTER WILL BE CLIENT'S SCOPE.
2.ONE COAT OF RED OXIDE PRIMER WILL BE GIVEN TO THE SHUTTER.
3.SINGLE PHASE. 3 CORE 1.5 SQ. CABLE REQUIRE AT SITE(CLIENT'S SCOPE)
4. FOR FINAL FINISH CLIENT SHOULD CONFIRM RAL COLOR SHADE.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

MOTORIZED ROLLING SHUTTER

CLIENT'S APPROVAL :

CLIENT - TATA PROJECTS

PROJECT - ALSTOM

SITE LOCATION - MADHEPURA, BIHAR

DWG. NO. : NIHVA/17-18/0011

SCALE: NTS | WT: | SHEET:1 OF 1

DRAWN BY: SURAJ | DATE: 26-04-2017

CHECK BY : SAGAR P. | DATE: 26-04-2017

APPROVED BY : R.K | DATE: 26-04-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGN IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.