NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Saint Gobain GMT-India

Date : 12.12.2020
Quote NO : SQT.20.21.2882
Kind Attn : Mr.Mithun S
Email Id : Mithun.S@saint-gobain.com
Contact No: 9746726585

Project Name & Location: Project at Vizag, Andhra Pradesh

Subject : Quotation for ASSA Abloy Crawford Make Dock Leveller

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Assa Abloy-Crawford make Dock Leveller - 9 Ton**	2000	2500	1	521,000	521,000	20,000	20,000
2	**Assa Abloy-Crawford make Dock Leveller - 12 Ton**	2000	2500	3	635,000	1,905,000	20,000	60,000
				Total		**2,426,000**		**80,000**
	P&F Charges			3%		**72,780**		
	Total Without Taxes					**2,498,780**		**80,000**
	GST Extra @ 18%			18%		449,780		14,400
	Total With Taxes					**2,948,560**		**94,400**
	Total Supply + Installation With Taxes							**2,948,560**
2	Transportation Charges					**Extra at Actual**		
3	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019


An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) **Technical Specification**

ASSA Abloy - Crawford make Dock Leveller



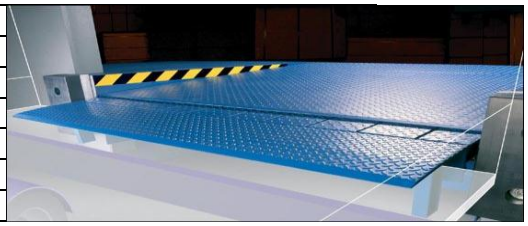

Sr. No	Description	Specifications For 9 Ton	Specifications For 12 Ton
1	Nominal Width	2000 mm	2000 mm
2	Nominal Length	2500 mm	2500 mm
3	Leveller Height	700 mm	750 mm
4	Load Capacity	90 kN	120 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm	80 µm
7	Lip Material	Steel	Steel
8	Lip Length	500 mm	500 mm
9	Tearplate Thickness	8 mm	10 mm
10	Control Box	950 LA	950 LA
11	Control System	Mains Switch	Mains Switch
12	European Standred	EN 1398 Dock levellers	EN 1398 Dock levellers
13	Nominal Motor Power	0.75kw	0.75kw
14	Control unit Protection Classs	IP 54	IP54
15	Magnetic valves	24 V/DC 18W S1	24 V/DC 18W S1

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	
1	Secured and fully covered Store area to keep the material	
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	
3	Electrical Supply on the site single phase/three phase points at different places.	
4	Any civil / masonry/structural work required	
5	All structure support required	
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	
7	Conduits, Cables required	

D) Terms & Conditions

Price : Ex Works Pune

Delivery : Minimum 12-14 weeks after receipt of confirmed Purchase order, Advance Payment and drawing approval

Payment : 80% Advance and Balance before dispatch

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Shrikant Mirkute on 8551098333**

With Best Regards
Pradeep Shinde
7219206333
For NIHVA Technologies Pvt Ltd