NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

The Railing Point & Antiques
Rajahmundry AP

Date : 30.06.2022
Quote NO : RR_22.23.0065
Kind Attn : Mr. Harnath
Email Id : harnathm@gmail.com
Contact No: 9533212122

Project Name & Location: The Railing Point & Antiques AP

Subject : Commercial Offer for Automatic Retractable Roof

Dear Sir / Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.


Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	1
C.	General Conditions	2
D.	Terms & Condtions	2

A) Commercial Offer

Sr No	Description	Size (mtr)	Qty	Supply & Installation Charges in INR	
			(Nos)	Unit Charge	Total
1	**Automatic Retractable Roof**	• 3500 X 2000 X 400 X 1 Panel • Installation Inclusive	1	2,30,000	2,30,000
		Total without Taxes			**2,30,000**
2		GST Extra @ 18%	18%		**Extra At Actual**
3		P&F Charges @ 3%	3%		**Included**
4		Transportation Charges			**In Client Scope**
5		Unloading Charges @ Site			**In Client Scope**

B) Technical Specification

1. Polycarbonate Compact Clear/Embossed 3.0 mm Thick
2. Profile : Powder Coated AL Frame
3. Guide : Annodized AL Guide
4. Interlocking
5. Motor Mechanism with control panel **a) 2 Remote Controlled** **b) Single Phase Bi-directional Motor** **c) Speed- 09-12m/min** **d) Power- As per Roof Dimension** **e) Mechanical Limit Switch** **f) Rack and Pinion Arrangement**
6. EPDM Gaskets and sealants
7. SS Fastners

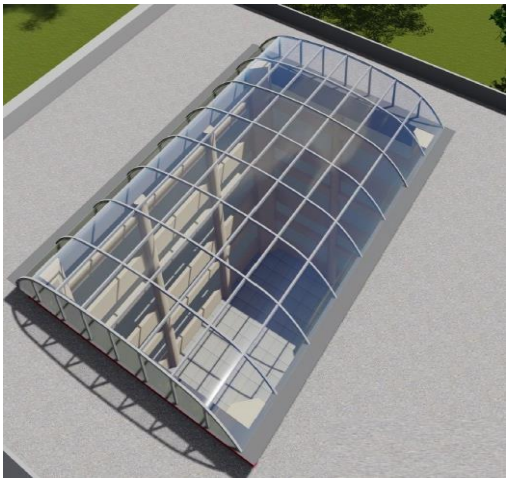

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1. Continuous uninterrupted access to installation section or as agreed seperately.
2. Provision of 230 V power supply for hand tools.
3. A dry and secure area, not in direct sunlight is to be provided for storage of product component
4. Access to site between 7 am to 8 pm should be provided.
5. Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7. Installation will start after receiving of Site Readiness Photographs or written Email communication.
8. We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9. For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for Remobilizing the Team.
10. If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11. After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: Please find below List which are in Client Scope

Sr. No		Remark
1	Secured and fully covered Store area to keep the material.	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required.	In Client Scope
5	All structure support required.	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price :	Ex Works Pune.
Delivery :	6-8 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.
Payment :	90% Advance along with Confirmed Purchase Order. 10% Against completion of Installation, Testing and Commissioning.
Validity :	Validity of offer is 15 days from the date of quotation.
Warranty :	12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.

With Best Regards
Pratibha Mete
8530872333
For NIHVA Technologies Pvt Ltd