


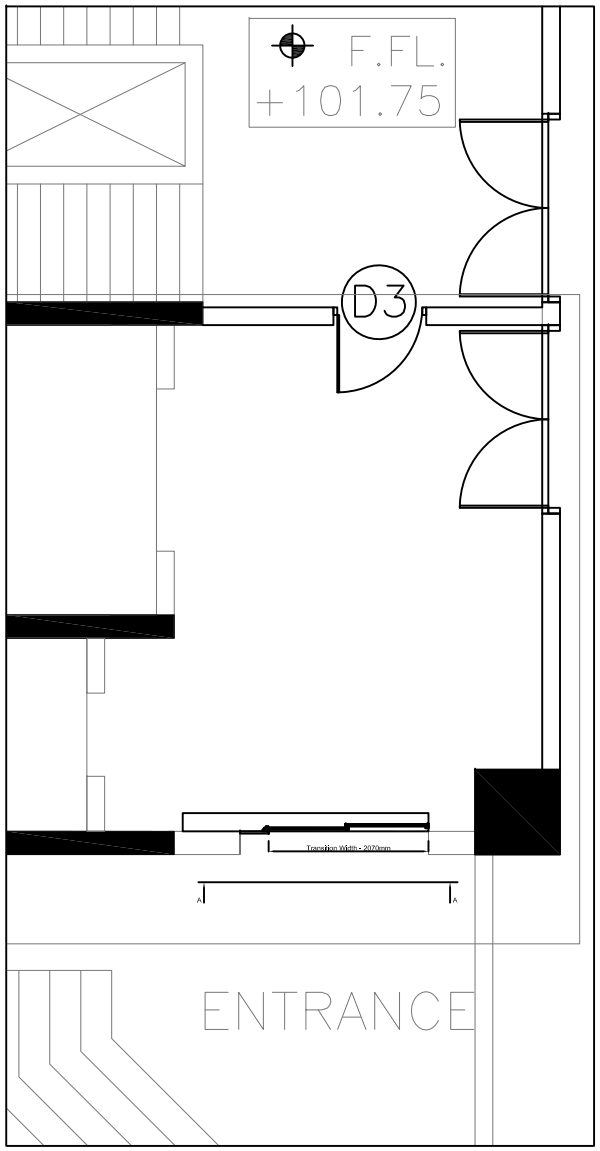


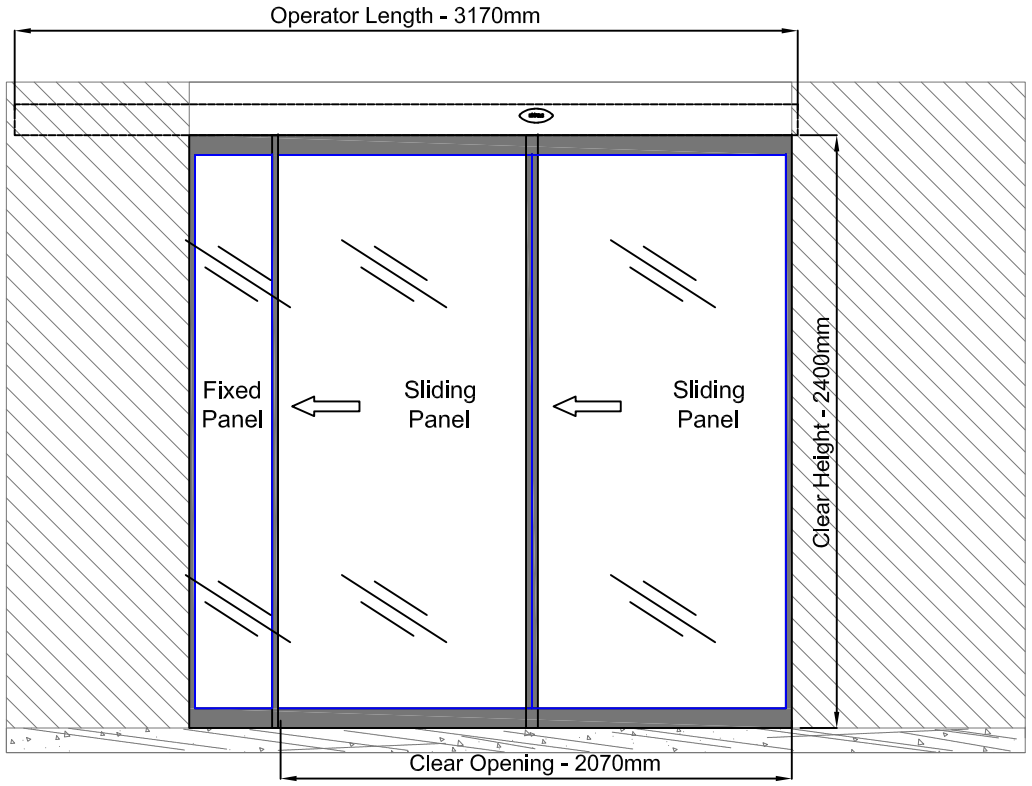

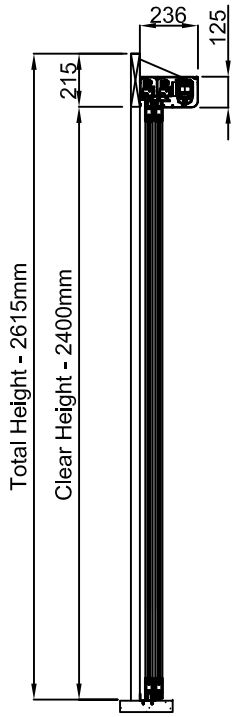

VIEW A - A (From Outside)

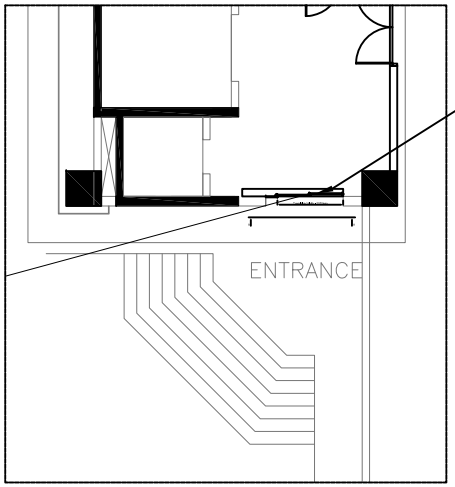

2070	2400	2
CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT	QTY

NOTES -

1. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
2. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE -NIHVA WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
3. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR IN CLIENT SCOPE.
4. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY CLIENT.
5. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS IN CLIENT SCOPE.

SPECIFICATIONS
1. Power - 170-260 V AC 50-60 Hz
2. Weight Carrying capacity - 170kgs for Single leaf, 240kgs for Double leaf.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE AUTOMATIC TELESCOPIC GLASS DOOR

		SIGN	DATE
DRAWN	SIDDHESHWAR		1.1.2021
CHECK	A.K.		1.1.2021
APPRD.			

ALL DIMENSION ARE IN mm

If any queries contact :-projectsupport@nihva.com

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - SEZ BIOTECH SERVICES PVT LTD
PROJECT - SEZ BIOTECH SERVICES PVT LTD
SITE - PUNE
DWG. NO.-NIHVA/20-21/0120 REV.- 0
SCALE: 01 WT: SHEET: 01 OF 01