NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Address
Mumbai

Date : 28.09.2019
Quote NO : SQT.19.20.2107R
Kind Attn : Mr. Deepak Maheshwari
Email Id :
Contact No: 9833535007

Project Name & Location: Retractable Roof ,Mumbai

Subject : Quotation for Retractable Roof

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.


Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size	Qty	Supply and Installation Charges in INR
			(Nos)	Total Amount
1	Retractable Roof	(W)5600mm x (L)2440mm x (H)700mm 2 Segment	3	12,45,000
			Total	**12,45,000**
		P&F Charges	**3%**	37,350
		Total Without Taxes		**12,82,350**
		GST Extra @ 18%	18%	2,30,823
		Total With Taxes		**15,13,173**
2		Transportation Charges		**In Client Scope**
3		Unloading Charges @ Site		**In Client Scope**

B) Technical Specification

1. Polycarbonate SABIC Make compact clear/Embossed 4.0 mm Thick
2. Profile : Powder Coated AL Frame (As per RAL colour)
3. Guide : Annodized AL Guide
4. Interlocking
5. Motors with Remote Control a) Single Phase Bi-directional Motor b) Speed- 09-12m/min c) Power- As per Roof Dimension d) Mechanical Limit Switch e) Rack and Pinion Arrangement -Z16/Molude4/Module6 f) Italian Make BFT Brand
6. Control Panel

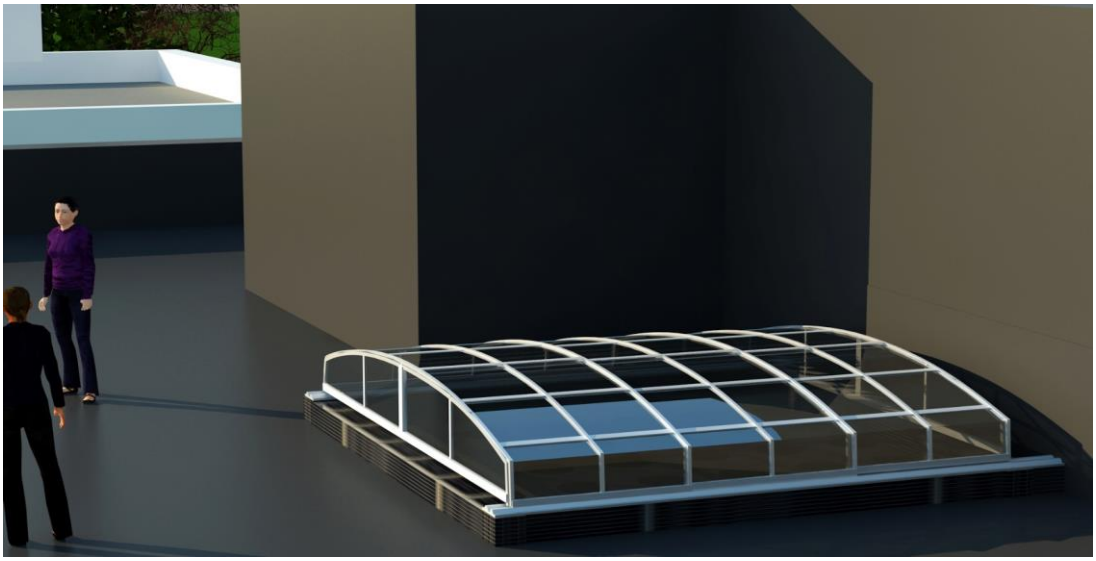

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readiness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipments are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No		Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 4- 5 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 10 years warranty for polycarbonate sheets and 5 years on powder coated AL Profile.

With Best Regards
Pradip
7709586333
For NIHVA Technologies Pvt Ltd