

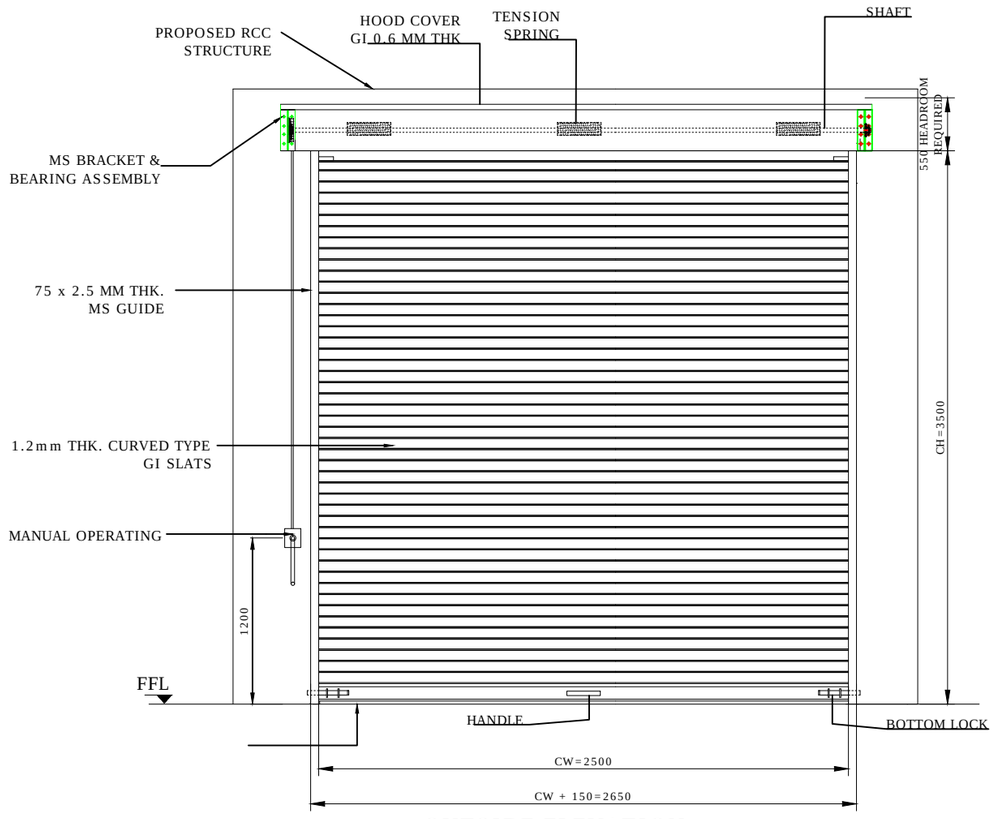



OUTSIDE ELEVATION

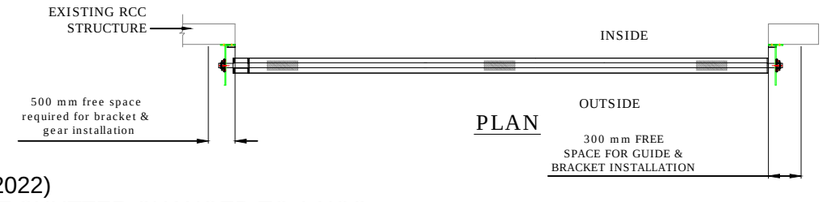


PLAN

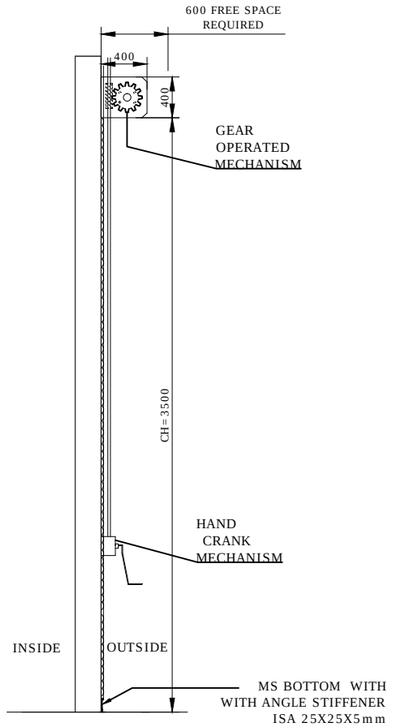

SIDE VIEW

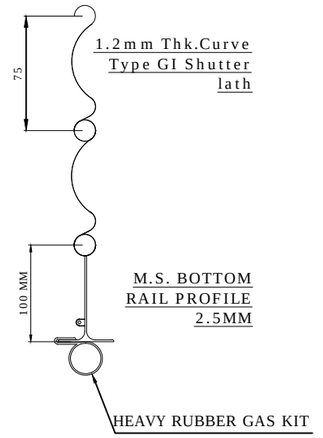

M.S. BOTTOM RAIL PROFILE 2.5MM

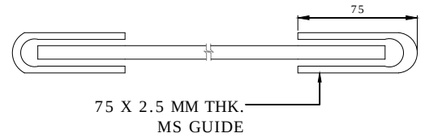

RAL CODE	RAL COLOR	APPROVED
RAL 9010	Pure White	
RAL 9002	Grey White	
RAL 7035	Light Grey	
RAL 5002	Ult. M. Blue	
RAL 7040	Window Grey	Approved

REV 01 (18-02-2022)
1. QUANTITY OF SHUTTER CHANGED TO 1 NOS.

REV 02 (19-02-2022)
1. CHANGED MOUNTING OF SHUTTER ON CONCRETE WALL.

REV 03 (22-02-2022)
1. FIXED THE MOUNTING OF LEVER ON LEFT SIDE.

REV 04 (05-03-2022)
1. MENTIONED APPROVED RAL CODE ON DRAWING

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2. IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.
3. SURFACE FINISH: POWDER COATING OF APPROVED RAL CODE.
4. MOUNTING ON OUTSIDE CONCRETE STRUCTURE.
5. MOUNTING OF LEVER WILL BE ON LEFT SIDE.

SR NO	(CW) CLEAR WIDTH	(CH) CLEAR HEIGHT	QUANTITY
1	2500	3500	01 NO

TOLERANCE - ±10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
GEAR OPERATED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	G.I.P		15.02.2022
CHECK	A.K.		15.02.2022
APPRD.	V.T.		15.02.2022

CLIENT - QUALITY INFRASTRUCTURE PVT LTD
PROJECT -GEAR OPERATED ROLLING SHUTTER
SITE LOCATION -GUJARAT
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/21-22/CLT/352
REV- R4
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01