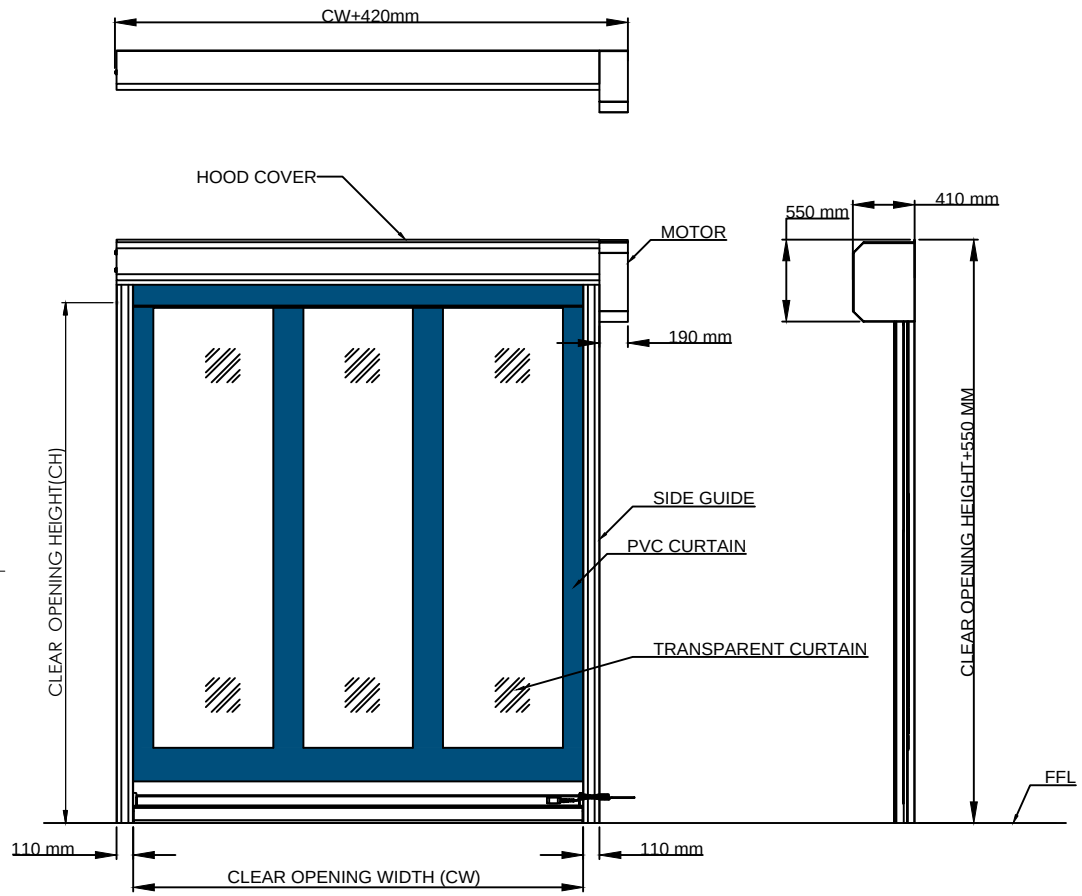


MOUNTING SURFACE	TO BE CONFIRMED	M.S. STRUCTURE REQUIRED (Y/N)
ON CONCRETE		NOT REQUIRED
ON BRICK WALL		YES REQUIRED
PUF PANEL		YES REQUIRED
PEB/EXISTING STRUCTURE		TO BE CHECKED WITH STRUCTURE DRAWING

RAL CODE FOR PVC CURTAIN
1. BLUE

CLEAR OPENING WIDTH (CW)	CLEAR OPENING HEIGHT (CH)	QUANTITY	MOTOR POSITION (RH/LH)
3000	3000	1 NO	
2500	2500	1 NO	

NOTE:
1. REQUIRED M.S. STRUCTURE , FITTING & ALL CIVIL WORK IS IN CLIENT SCOPE.
2. IF REQUIRED M.S. STRUCTURE SHOULD BE RIGID & IT SHOULD BE FIXED/WELDED WITH EXISTING SUPPORT AT SITE (IN CLIENT SCOPE).
3. MOUNTING SURFACE TO BE CONFIRMED .
4. IF REQUIRED ,M.S. STRUCTURE DRAWING WILL BE PROVIDED AFTER CONFIRMATION OF MOUNTING SURFACE.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: NIHVA MAKE HIGH SPEED DOOR

	NAME	SIGN	DATE
DRAWN	S.M.S.		22.12.2020
CHECK			
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - TraEIPL_22DEC2020
PROJECT -
SITE LOCATION - PUNE
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/20-21/0115 REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: A4