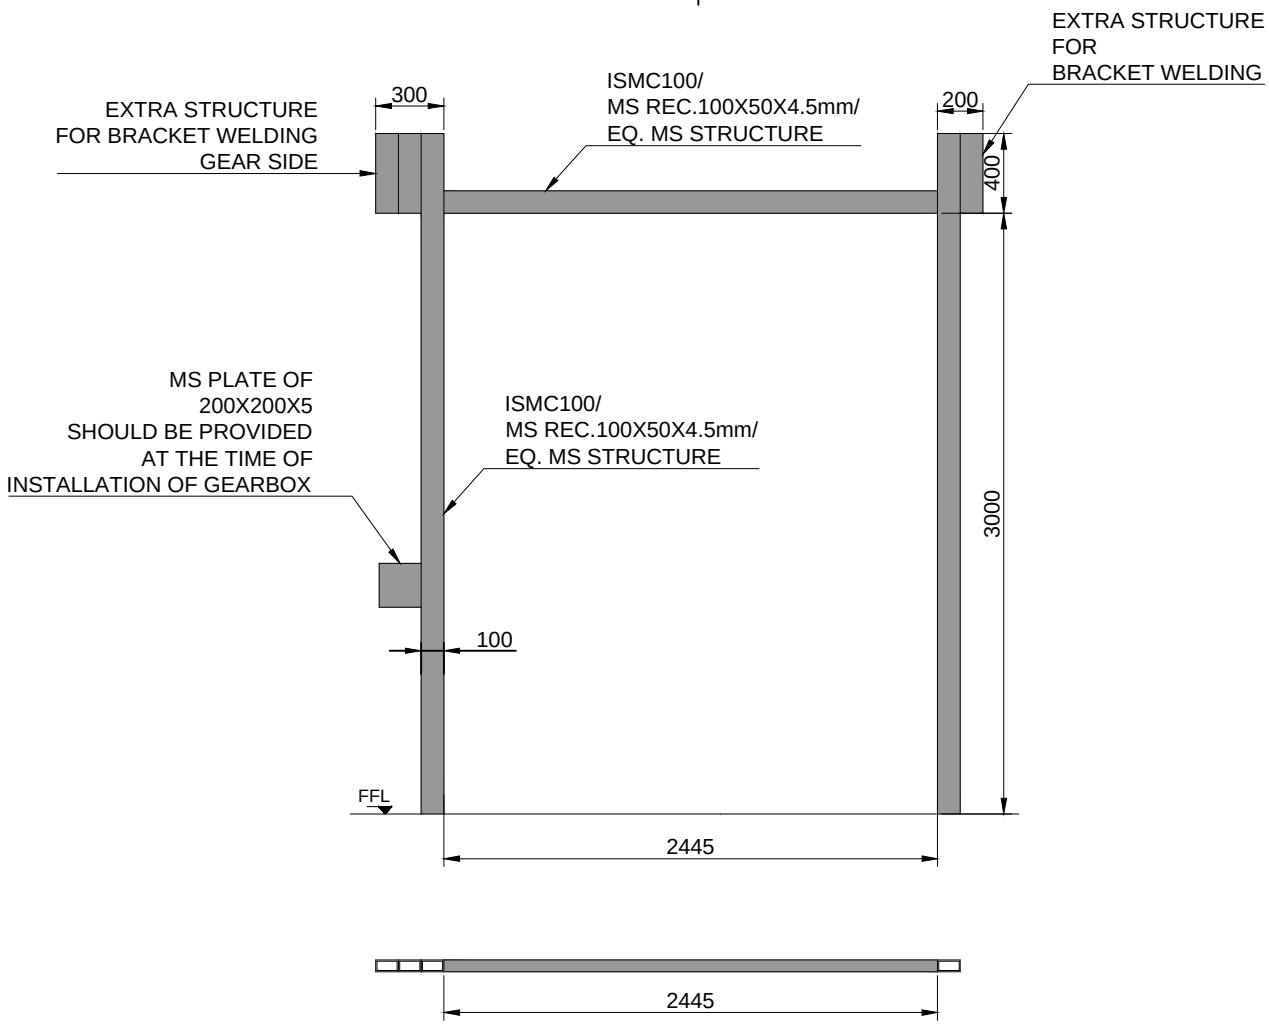


S.N.	LOCATION	SIZE	QUANTITY- Left side gearbox
1	B400	2445(W)X3000(H)	07
2	B500	2445(W)X3000(H)	06 (1 nos shutter will have both side operation)
3	B600	2445(W)X3000(H)	05 (1 nos shutter will have both side operation)
TOTAL QTY. OF SHUTTER			18

TOLERANCE - ±10mm

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: STRUCTURE FOR GEAR OPERATED ROLLING SHUTTER 2.445mX3m WITH LEFT SIDE GEARBOX

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	OMKAR		26-04-2018
CHECK	PRADEEP		26-04-2018
APPRD.	PRADEEP		26-04-2018

CLIENT - INDOSPACE
PROJECT - BUILDING B500 & B600
SITE LOCATION - CHAKAN 3
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/18-19/0017/1
REV- 0
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01