

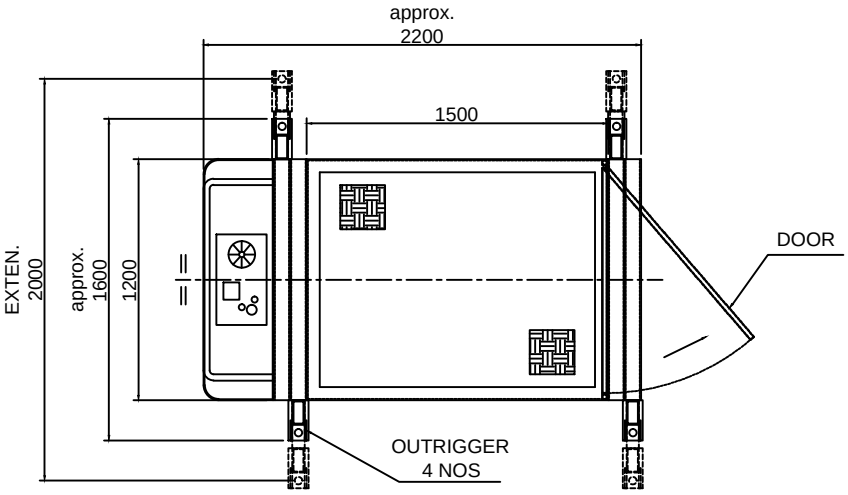


Khandelwal Praveen

Digitally signed by Khandelwal Praveen
DN: cn=Khandelwal Praveen, o=Siemens, email=praveen.khandelwal@siemens.com
Reason: I am approving this document
Location: Kalwa
Date: 2018.10.08 11:10:04 +05'30'

APPROVED

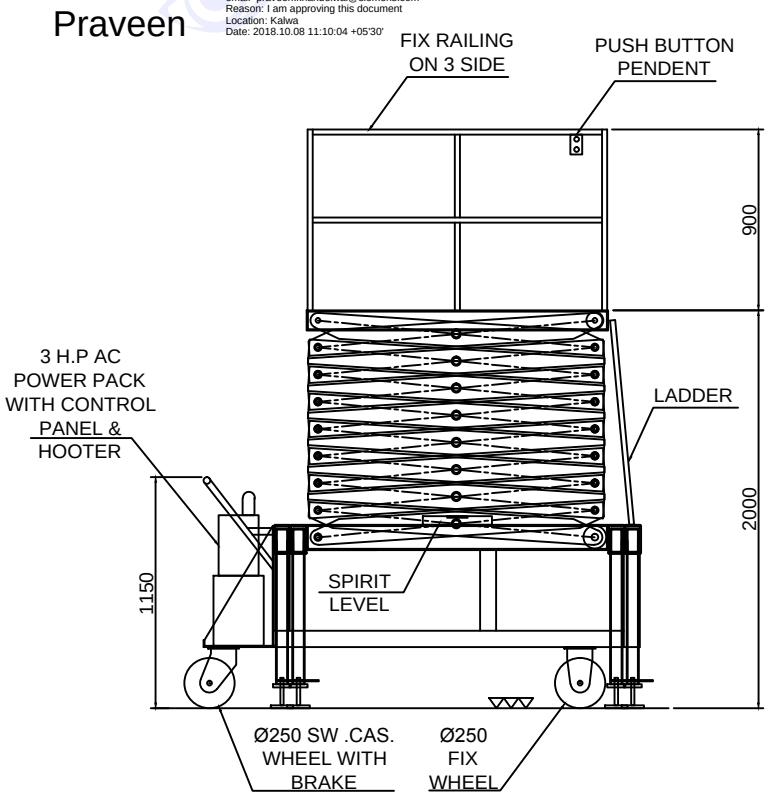

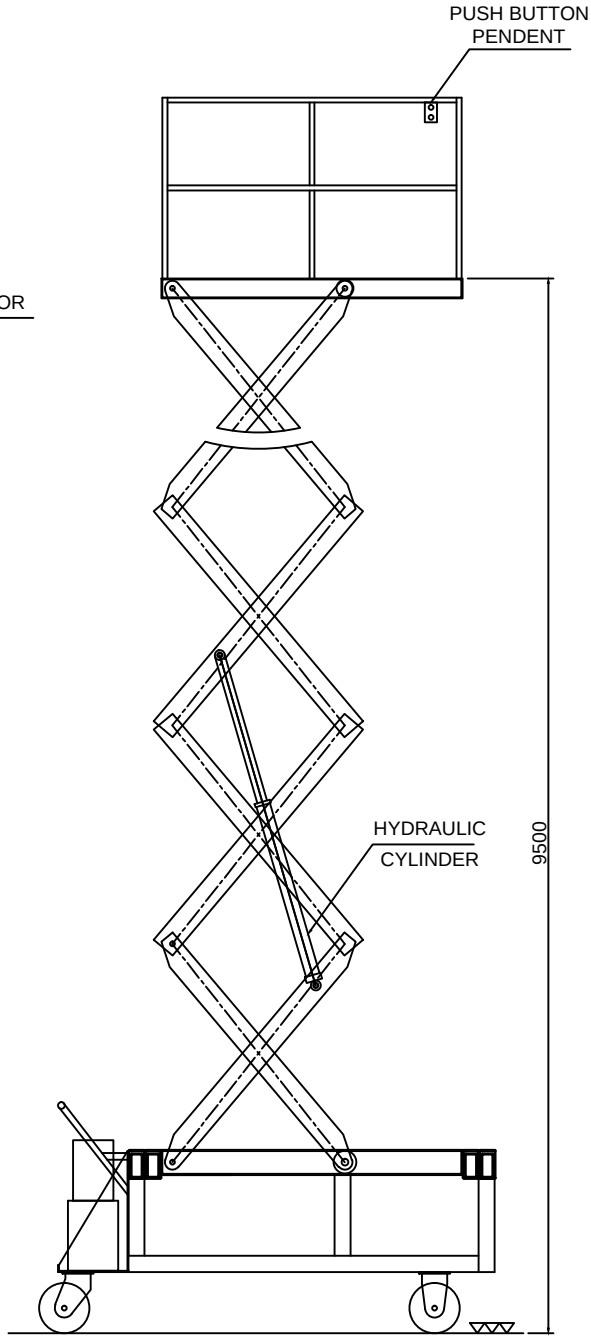

REV POINT :
1. Spirit Level Tubes are = Provided.
2. Interlock key is to be installed for Bottom operation and top operation.
3. Safety Hose Burst Valve = Provided.
4. Fall arrest anchor = Provided.
5. Electrical System On alarm or indication should be available on lift = R Y B Indicator Provided.
6. Hooter = Provided.

NO OF SCISSOR	08 PAIRS
RAILING HT	900 MM
LIFT HT	7500 MM
OPEN HT	9500 MM
CLOSE HT	2000 MM
POWER PACK	3 HP, 3 PH
PLATFORM	1500L X 1200W
CAPACITY	300 KGS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE : -
ELECTRO HYDRAULIC SCISSOR LIFT (MOBILE)

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	SIGN	DATE
DRAWN	P.A	28.09.2018
CHECK	R.D	28.09.2018
REV.	R01	05.10.2018
APPROVAL		

CLIENT - SIEMENS
PROJECT -
SITE -
DWG. NO. : NIHVA/18-19/0136/R01
If any queries contact : projects@nihva.com
SCALE: NTS | WT: | SHEET: 01 OF 01
ALL DIMENSION ARE IN mm