NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No - SQT/18-19/0467 **Date : 16.08.2018**

Hindustan Equipments Private Limited
E-56/B, Sector C, Sanwer Road,
Indore - 453551, Madhya Pradesh, India

Kind Attn: Mr. Ashok Devada
Email: ashok.devada@hindustanengineering.in
Contact No: 9406802091


Project Name And Location : Indore

Subject : Quotation for Telescopic Conveyor

Dear Sir
Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication. Please find below our best offer.

Commercial Offer

Telescopic Belt Conveyor (Made in India)

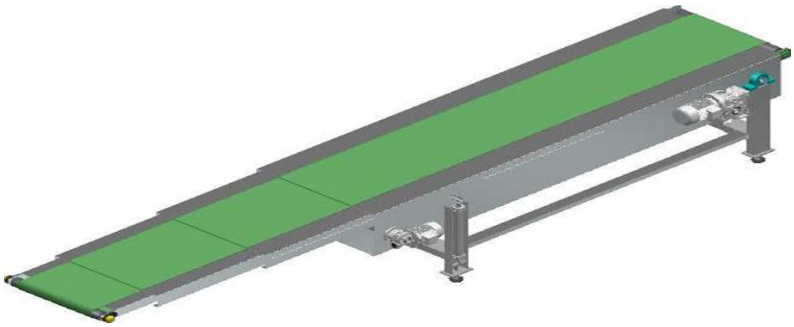

Sr. No.	Description	Qty	Unit	Rate In INR	Net Amount INR
A	**Telescopic Belt Conveyor (Made in India) (Supply + Installation)**				
1	1. MOC: MS POWDER COATED 2. BOX SIZE: 500 x 1100 mm 3. BOX WEIGHT: 60 KG 4. BELT WIDTH: 700 MM 5. MOTOR: MGM VARVEL 2.2 KW MOTOR. FOR CONVEYOR 6. MOTOR: MGM VARVEL 1.1 KW MOTOR. FOR TELESCOPIC CONVEYOR 7. LOADING HEIGHT: 1150 MM. 9. HYDRAULICS: AHP HYDRAULICS. 10, SPEED OF CONVEYOR: 15 MTR/MIN 11. CONVEYOR FIX LENGTH 6MTR 12. TELESCOPIC CONVEYOR LENGTH 6 MTR	1	No	1,300,000	1,300,000
				Total	1,300,000

GST Pune	27AAECN0437H1ZM

TOTAL BASIC AMOUNT	**1,300,000**

General Prerequisites Required at Site

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery
4. Fork lift/crane to be provided if required .
5. Scaffolding require for Installation it is in client scope.

Limit of Supply

1. Provide place to store the material to be installed .
2. Be responsible for the safe custody of all material.
3. Provide place to safely store all the tools of installation
4. Provide change & rest room for the workers.

Quote/Supply is based on

1. BOM is calculated as per standard quantity measurement
2. In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage will be to customer account.
3. Billing will be as per the supply of material ,not as per site measurements

The supply included only those mentioned in the quote & does not include

1. Unloading from truck placement on site
2. Electrical connection for control panel.

Client Scope

1. Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope
3. All structure support is in client scope
4. NIHVA Will provided structure drawing only if required
5. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

Terms and Conditions :

1	**Price**	:	Ex. Works Pune
2	**P & F Charges**	:	@3% of Total Supply Value
3	**Freight Notes**	:	Extra as applicable + Taxes
4	**Delivery**	:	8 - 9 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5	**Payment**	:	80% Advance along with Confirmed Purchase Order and Balance before Dispatch.
6	**Insurance**	:	Extra As applicable
7	**Taxes**	:	GST @18%
9	**Validity**	:	Validity of Offer is 15 days from the date of quotation
10	**Warranty**	:	12 months from the date of supply.

Please feel free to contact **Mr. Vijay Tarak - 08551093333** For any further Clarification /Information in this concern.

With Best Regards

Pratiksha
7219207333

For NIHVA Technologies Pvt Ltd