




SIDE VIEW

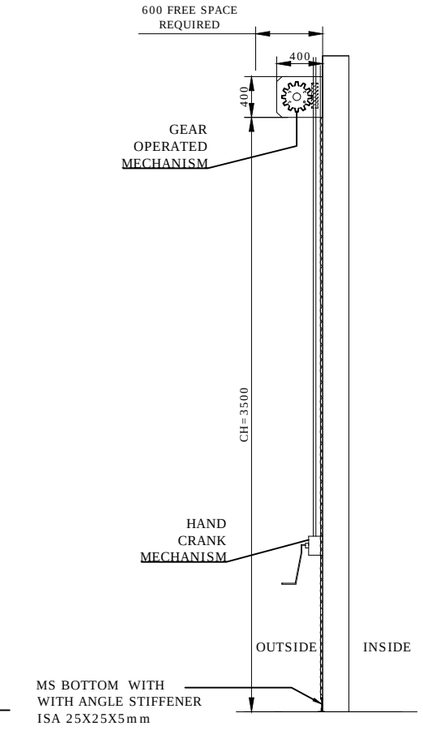


OUTSIDE ELEVATION

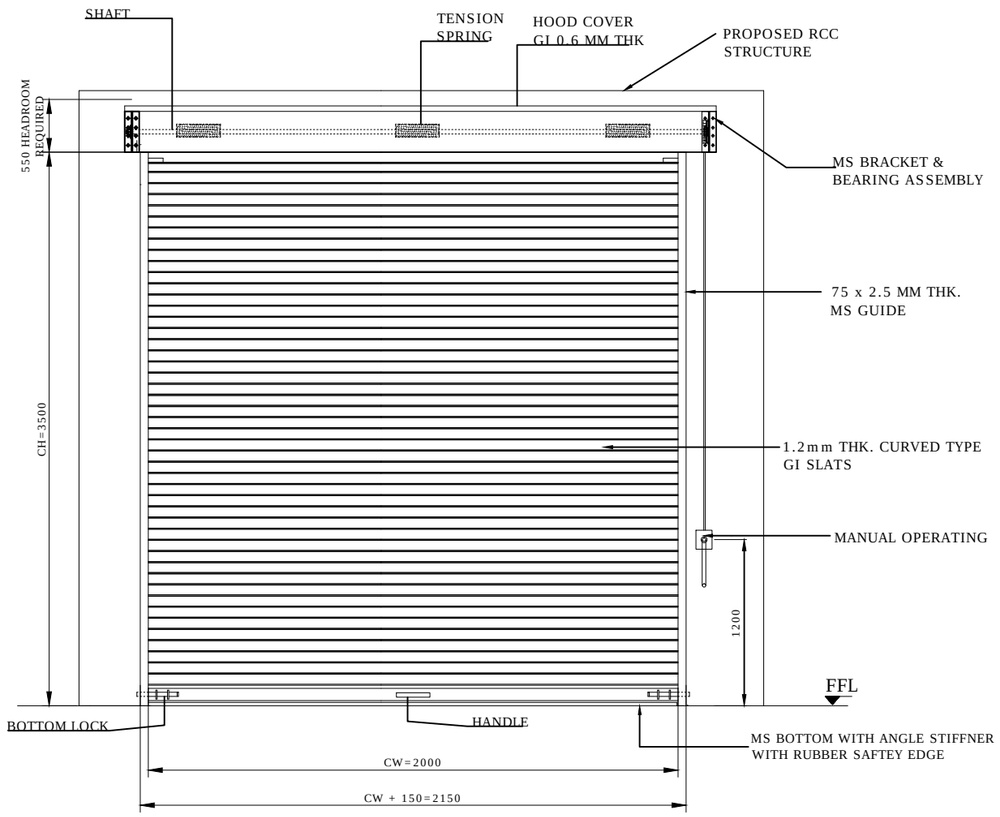

PLAN

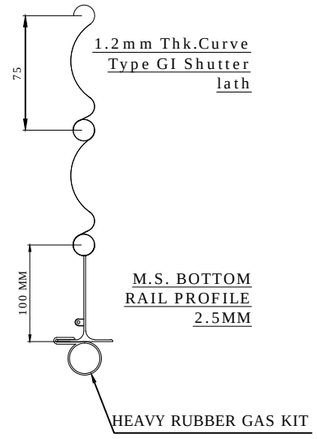

M.S. BOTTOM RAIL PROFILE 2.5MM

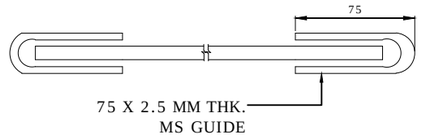

RAL CODE	RAL COLOR	APPROVED
RAL 9010	PURE WHITE	
RAL 9002	GREY WHITE	
RAL 7035	LIGHT GREY	
RAL 5002	ULT. M. BLUE	

REV 01 (19-02-2022)
1. CHANGED MOUNTING OF SHUTTER ON CONCRETE WALL.

REV 02 (22-02-2022)
1. FIXED THE MOUNTING OF LEVER ON RIGHT SIDE.

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2. IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.
3. SURFACE FINISH: POWDER COATING OF APPROVED RAL CODE.
4. MOUNTING ON OUTSIDE CONCRETE STRUCTURE.
5. MOUNTING OF LEVER WILL BE ON RIGHT SIDE.

TOLERANCE - ±10mm

SR NO	(CW) CLEAR WIDTH	(CH) CLEAR HEIGHT	QUANTITY
1	2000	3500	01 NO

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
GEAR OPERATED ROLLING SHUTTER

	NAME	SIGN	DATE
DRAWN	G.I.P		15.02.2022
CHECK	A.K.		15.02.2022
APPRD.	V.T.		15.02.2022

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - QUALITY INFRASTRUCTURE PVT LTD
PROJECT -GEAR OPERATED ROLLING SHUTTER
SITE LOCATION -GUJARAT
DWG. NO. : NIHVA/21-22/CLT/350 | REV- R2
SCALE: NTS | WT: | SHEET: 01 OF 01