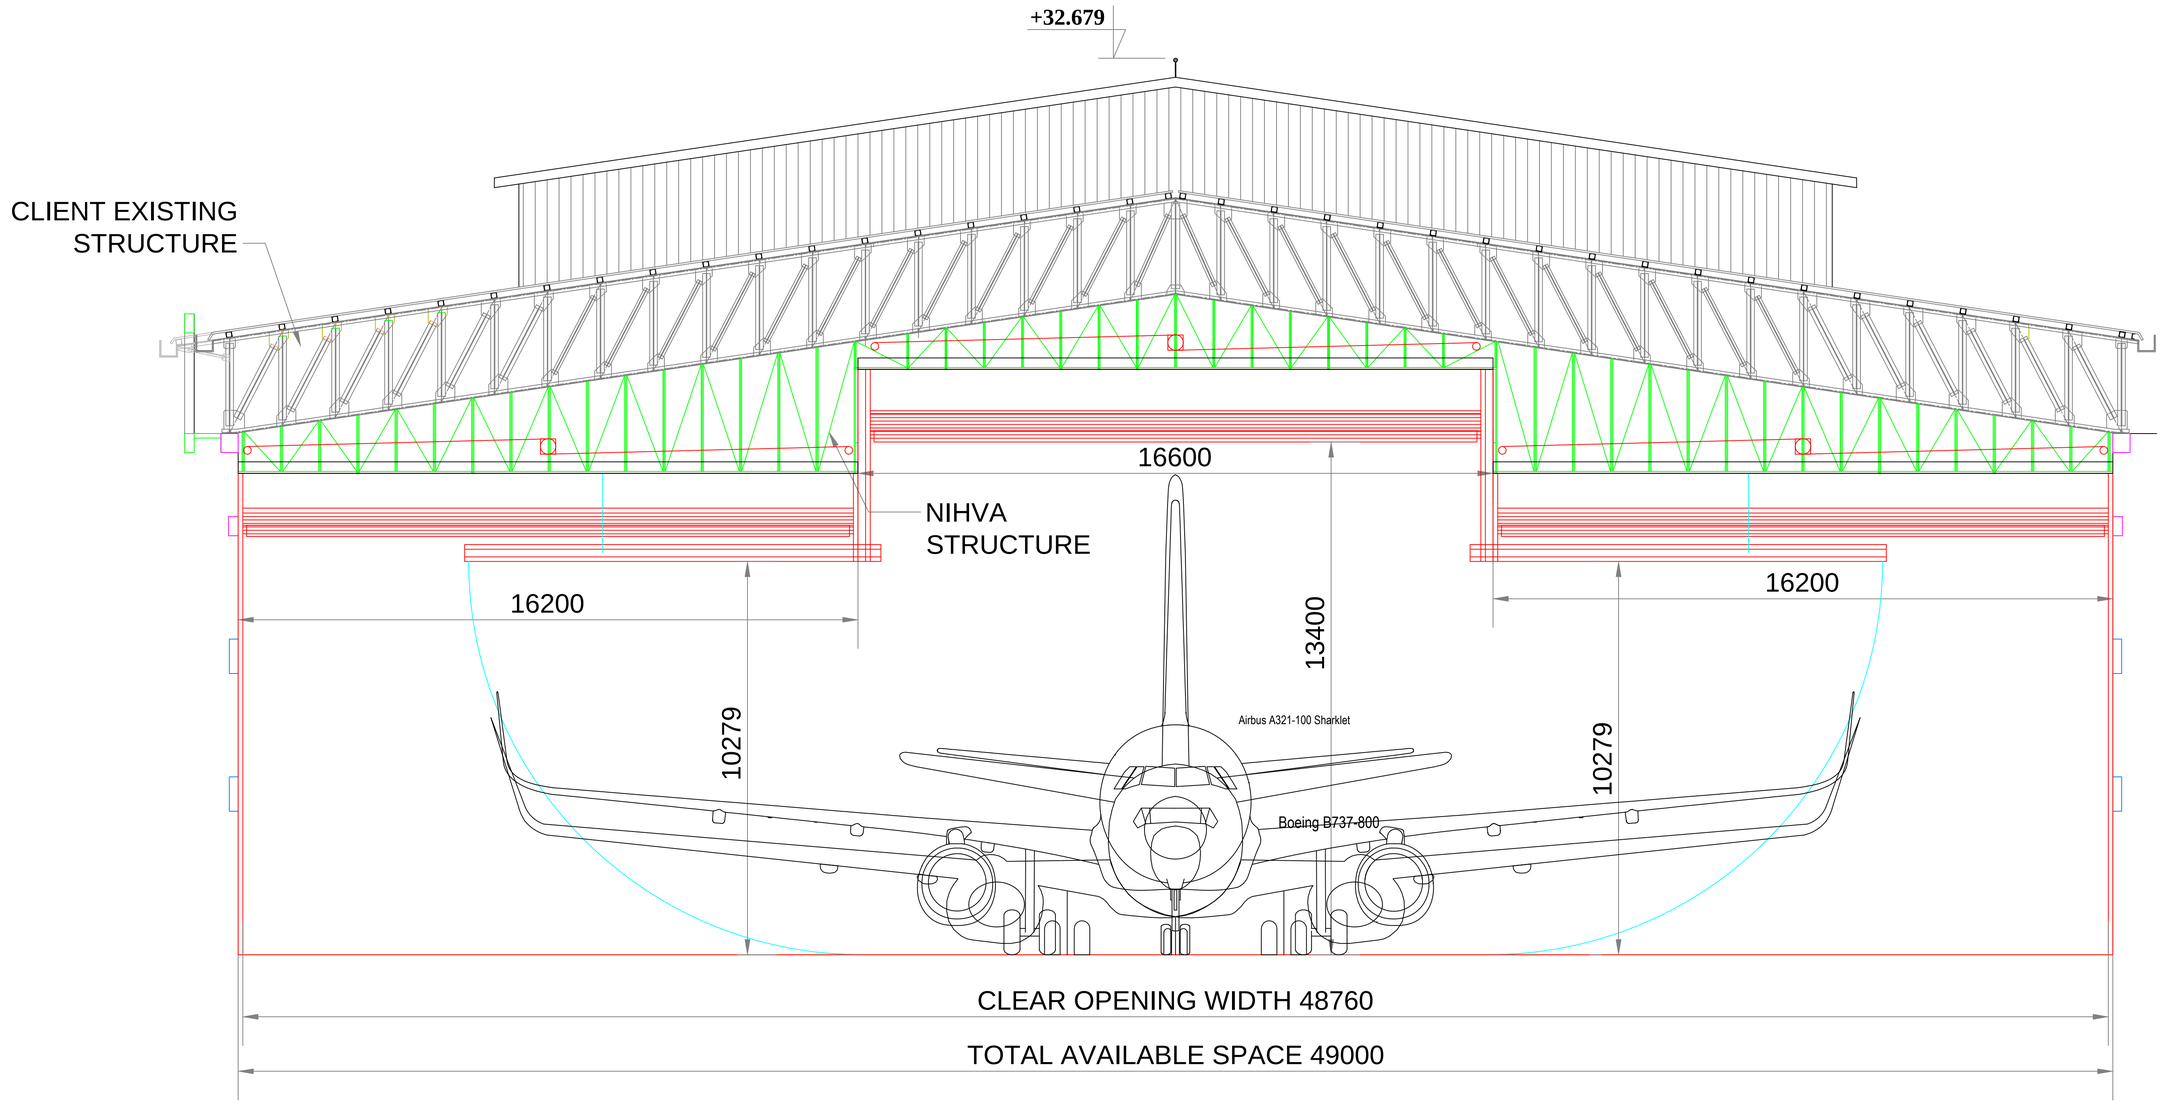


NOTE :

1. All dimensions are in mm.
2. This drawing is only a reference drawing.
3. Loads on existing structure to be checked and verified by CIAL.
4. Civil work for 2 nos structural vertical column and 2 nos mullion pit to be provided by CIAL.
5. Door supporting structure shall be prefabricated and connected by bolting arrangement, there wont be any welding at site.
6. Removal of existing structure cladding to be done by CIAL prior to the structure installation.
7. Fire line of one side need to be re-routed like it has been done in past on opposite side.
7. INSTALLATION TIME:
   A. Installation time for hanger supporting structure: 4 to 5 weeks.
   B. Installation time for door after structure installation: 4 weeks.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
HANGER DOOR
INSTALLATION

	NAME	SIGN	DATE
DRAWN	G.P.		10.12.2021
CHECK	A.K.		10.12.2021
APPRD.	V.T.		10.12.2021

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES
PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -CIAL

LOCATION -

PRODUCT -HANGER DOOR

If any queries contact : design@nihva.com

NIHVA\21-22\CLT\0277 REV- 00

ALL DIMENSION ARE IN mm

SCALE: NTS

SHEET: 01 OF 01