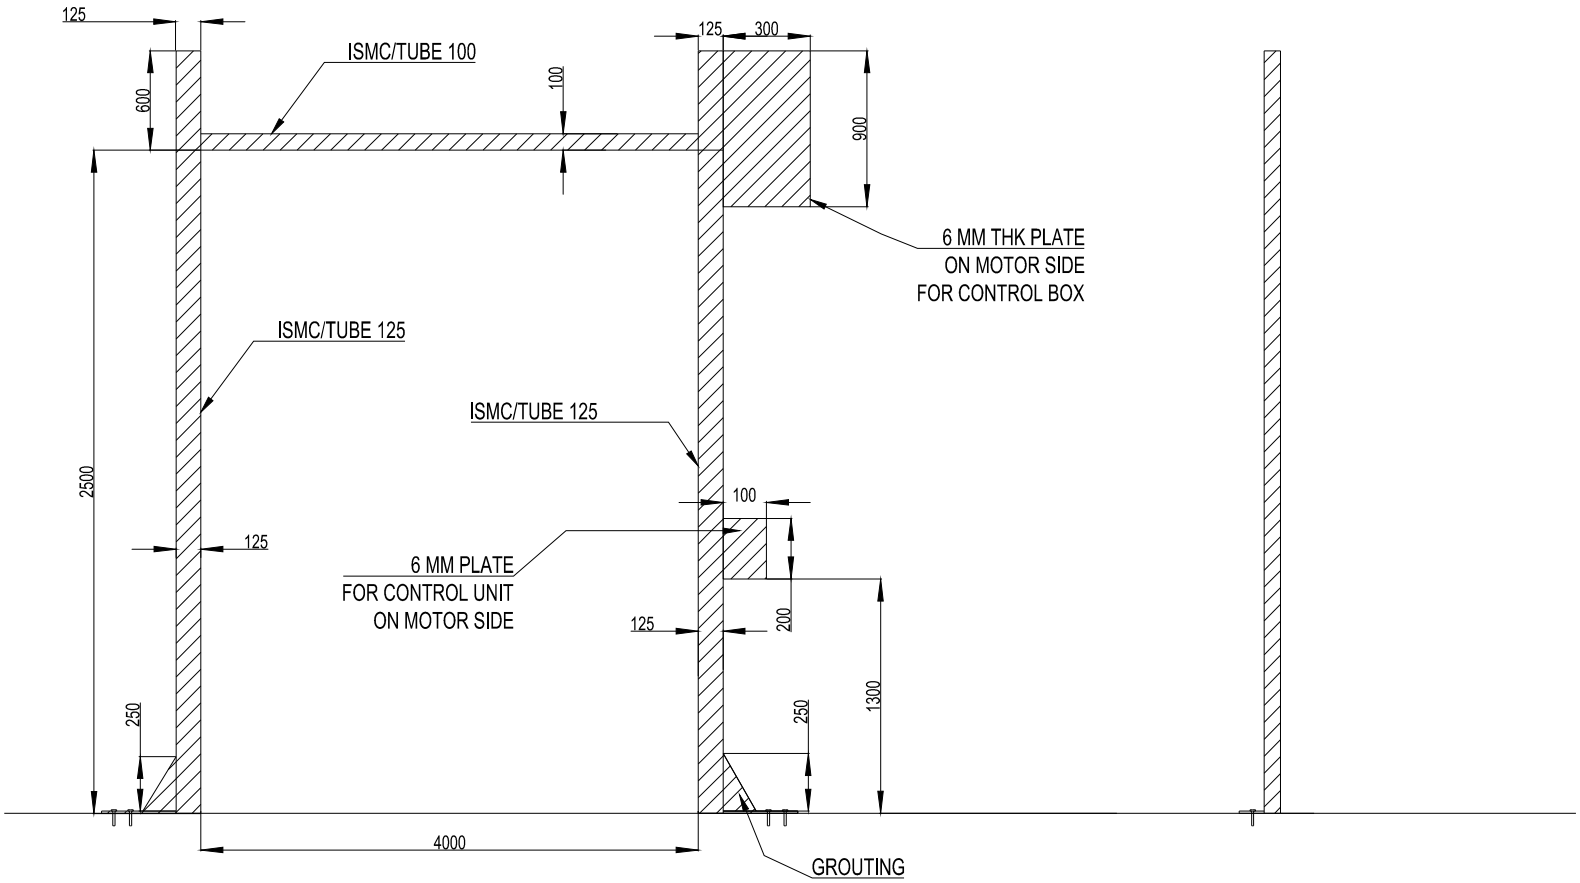


M.S. STRUCTURE F.V.

M.S. STRUCTURE S.V.

NOTES-
1. REQUIRED M.S. STRUCTURE , FITTING & ALL CIVIL WORK IS IN CLIENT SCOPE .
2. HIGH SPEED DOOR WILL BE INSTALLED AFTER READINESS OF STRUCTURE AS PER DRAWING .
3. M.S. STRUCTURE SHOULD BE RIGID & NEED TO BE FIXED/WELDED WITH EXISTING STRUCTURE AT SITE .
4. KINDLY WELD PLATES FOR CONTROL BOX & PENDANT TO THE MOTOR SIDE AS PER DRAWING.

4000	2500	2 NOS	M.S. STRUCTURE
CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT	QTY	MOUNTING SURFACE

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE ASSA ABLOY RP 300
M.S. STRUCTURE

	NAME	SIGN	DATE
DRAWN	S.M.S.		17.2.2021
CHECK	S.M.S.		17.2.2021
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - ABB INDIA LIMITED
PROJECT -
SITE LOCATION - PEENYA , BENGLARU
If any queries contact : projectsupport@nihva.com
DWG. NO. : NIHVA/20-21/0162 REV- R00
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 2 OF 2