NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# Sales Quotation

**Quotation No - SQT/18-19/0432** **Date : 28.07.2018**

**Kinemach Engineering & Machines Pvt Ltd**
Hinjawadi Phase- I, Pune 411057

**Kind Attn:** Mr. Rishi Raj
**Email:** rishi@kinemach.com
**Contact No:** 7902622727


**Project Name And Location :**

**Subject :** Quotation for Telescopic Conveyor

Dear Sir
Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication. Please find below our best offer.

**Commercial Offer**

**Telescopic Belt Conveyor (Made in India)**

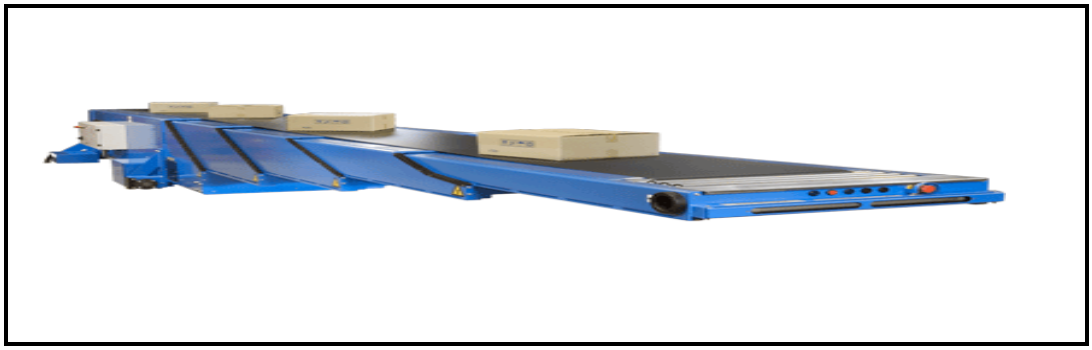

| Sr. No. | Description | Qty | Unit | Rate In INR | Net Amount INR |
|---|---|---|---|---|---|
| **A** | **Telescopic Conveyor (Made in India) ( Supply + Installation )** | | | | |
| 1 | 1) Conveyor Total length : 13 Mtr<br>2) Extension length : Fixed Lenght = 4 Mtr<br>Extension = 2.5 Mtr<br>4) Inclination angle: 45 degree<br>5) Hydrauli cylinder stroke:- 800 mm<br>6) Width of Conveyor : 700 mm<br>7) Material To Handle : Boxes<br>6) Capacity: continously loading<br>7) Weight : 25 kg<br>8) Size : 450 X 450 X 450 mm<br>9) Temperature : Ambient<br>10) Belt Movement : Bi Directional<br>11) Main Body Conveyor : Manufacturing From MS Tube & MS Plate<br>12) Panel : The Conveyor comes with a fixed panel on rear side & Front Side only operating panel with emergency stopper , sensor bar , LED Lighting | 1 | No | 23,00,000 | 23,00,000 |
| | | | | **Total** | 23,00,000 |

| | |
|---|---|
| **GST Pune** | 27AAECN0437H1ZM |

| | |
|---|---|
| **TOTAL BASIC AMOUNT** | **23,00,000** |

**General Prerequisites Required at Site**

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery
4. Fork lift/crane to be provided if required .
5. Scaffolding require for Installation it is in client scope.

**Limit of Supply**

1. Provide place to store the material to be installed .
2. Be responsible for the safe custody of all material.
3. Provide place to safely store all the tools of installation
4. Provide change & rest room for the workers.

**Quote/Supply is based on**

1. BOM is calculated as per standard quantity measurement
2. In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage will be to customer account.
3. Billing will be as per the supply of material ,not as per site measurements

**The supply included only those mentioned in the quote & does not include**

1. Unloading from truck placement on site
2. Electrical connection for control panel.

**Client Scope**

1. Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope
3. All structure support is in client scope
4. NIHVA Will provided structure drawing only if required
5. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

**Terms and Conditions :**

| | | | |
|---|---|---|---|
| 1 | **Price** | : | Ex. Works Pune |
| 2 | **P & F Charges** | : | @3% of Total Supply Value |
| 3 | **Freight Notes** | : | Extra as applicable |
| 4 | **Delivery** | : | 8 - 9 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval. |
| 5 | **Payment** | : | 80% Advance along with Confirmed Purchase Order and Balance before Dispatch. |
| 6 | **Insurance** | : | Extra As applicable |
| 7 | **Taxes** | : | GST @ 18% Extra as applicable |
| 9 | **Validity** | : | Validity of Offer is 15 days from the date of quotation |
| 10 | **Warranty** | : | 12 months from the date of supply. |

Please feel free to contact **Mr. Shailendra on 9168423687** For any further Clarification /Information in this concern.

With Best Regards

Pratiksha
7219207333
For NIHVA Technologies Pvt Ltd