
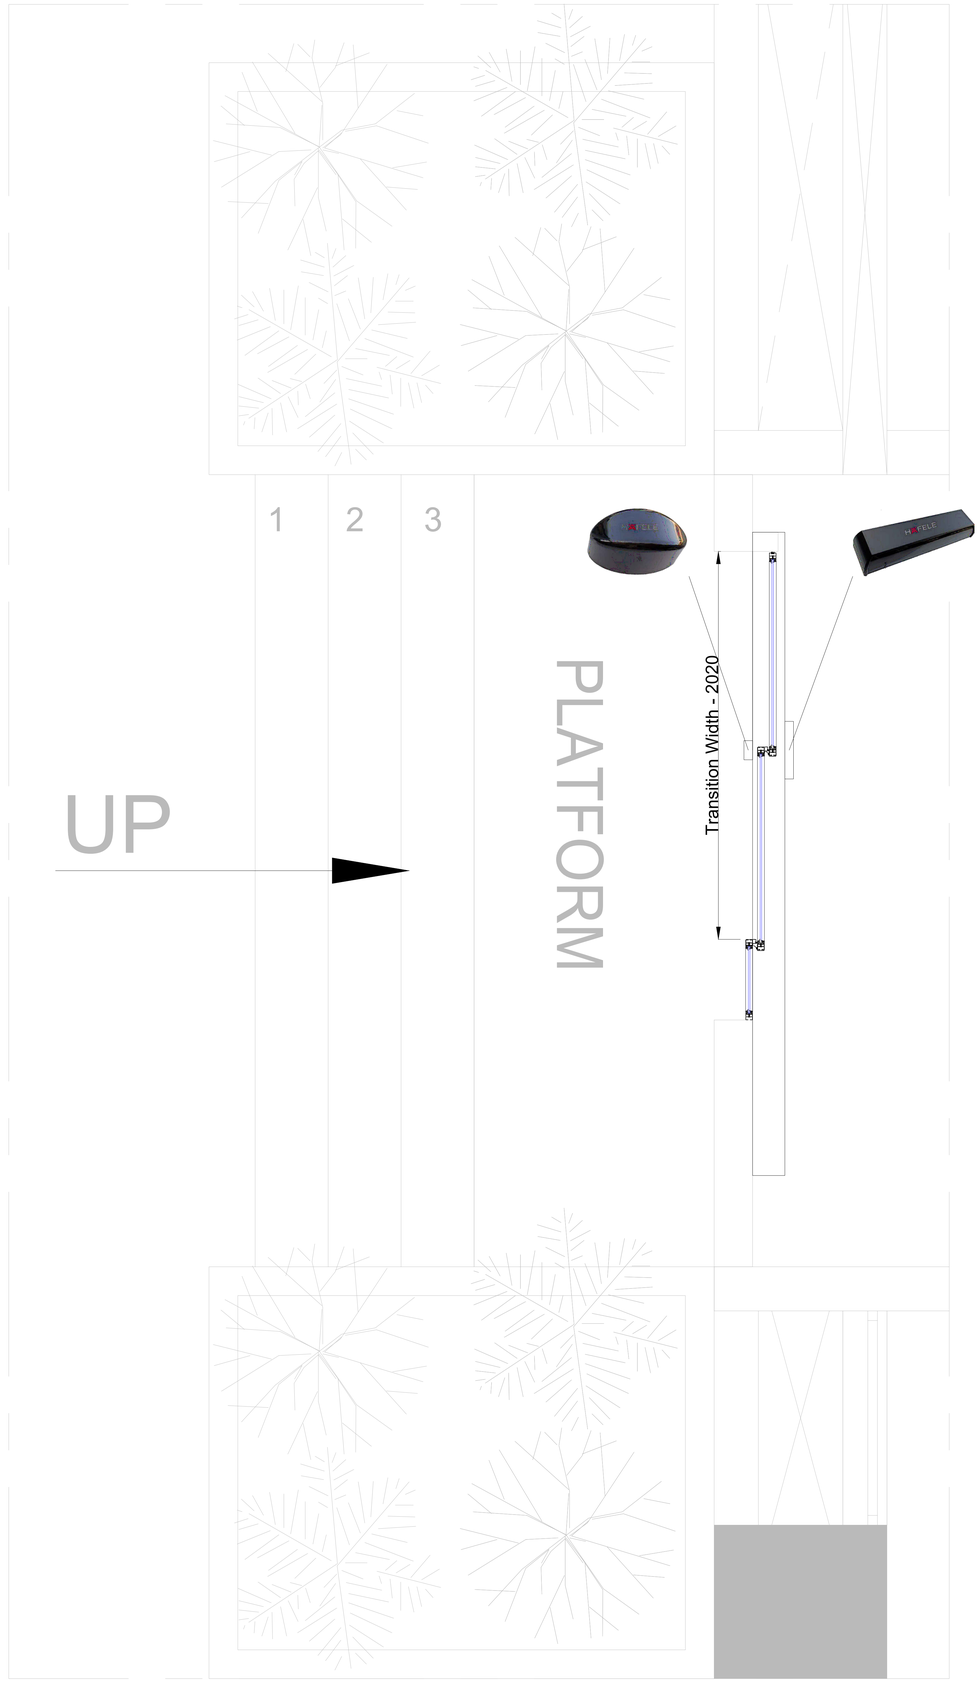


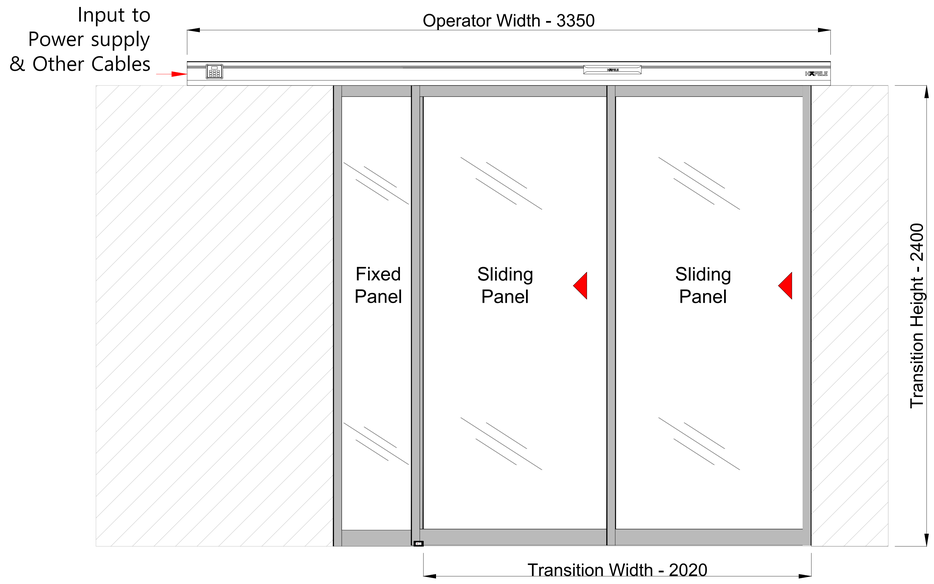

Preliminary drawing
only for offer purposes.
No rights can be claimed from this drawing.

DRAWING APPROVED SUBJECT TO BELOW MENTIONED TERMS & CONDITIONS

TERM & CONDITIONS:

1. INSTALLATION WORKS WOULD BE STARTED IN 2 WEEKS FROM THE DATE OF PAYMENTS RECEIVED.
2. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
3. PLEASE CHECK QUANTITY OF MATERIALS AGAINST PACKING LIST AND NOTIFY ANY MISSING ITEMS AND WE ARE NOT RESPONSIBLE FOR ANY MISSING ITEMS LATER.
6. FOR OPERATOR MOUNTING ON GLASS - GLASS TO BE PROVIDED WITH HOLES AS PER MOUNTED DETAILS.
7. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE - HAFELE WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
8. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR, ACCESSORIES.
9. PROVIDED SUPPORT STRUCTURE SHOULD WITHSTAND THE STATIC & DYNAMIC LOAD OF OPERATOR, ACCESSORIES & SLIDING DOORS. (OPERATOR WEIGHT - ±50KGS, GLASS WEIGHT - AS PER SIZE)
10. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY OTHERS.
11. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS NOT INCLUDED IN HAFELE SCOPE OF WORK.
12. ALL NECESSARY SCAFFOLDING, CRANEAGE, FREE & UNINTERRUPTED ACCESS TO SITE & STORAGE ETC. TO BE PROVIDED BY YOU.

PROJECT - Serum Institute, Pune

SPECIFICATIONS

1. Power - 170-260 V AC 50-60 Hz
2. Weight Carrying capacity - 170kgs for Single leaf,
   240kgs for Double leaf.

HÄFELE