




Client scope
* Drainage area or pipe need to be shift from right side *Roof need to be shift at top Approx 300mm *Gutter need to be close till pipe

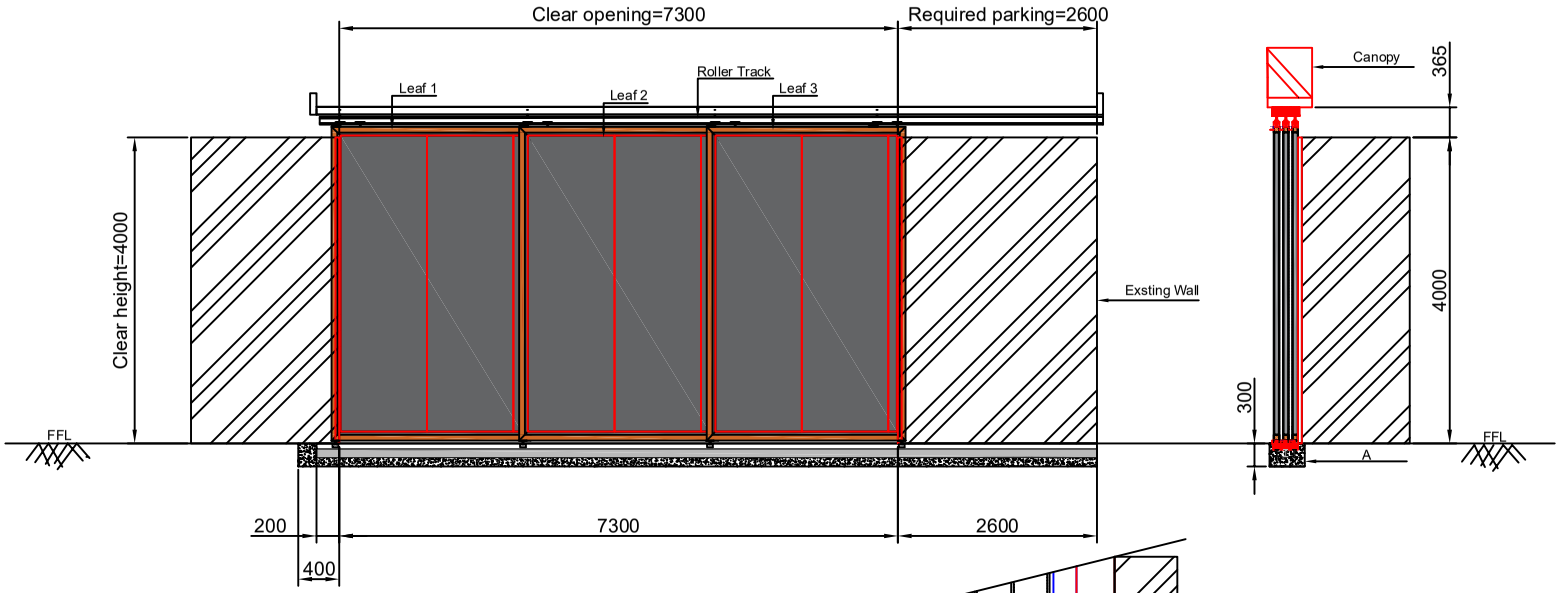

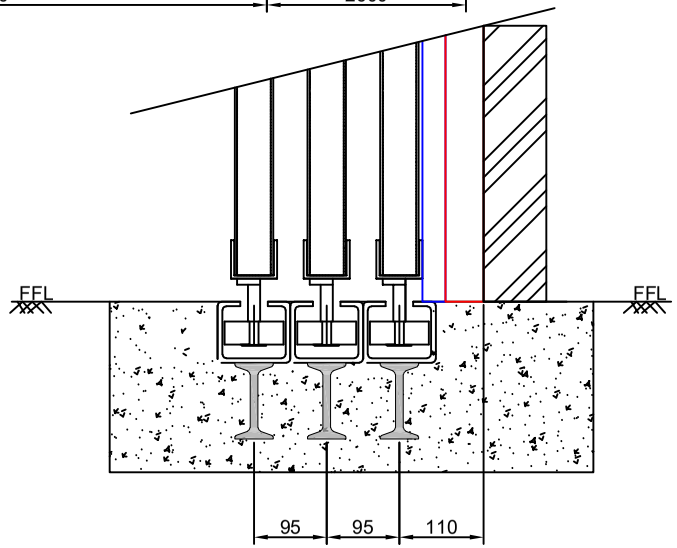

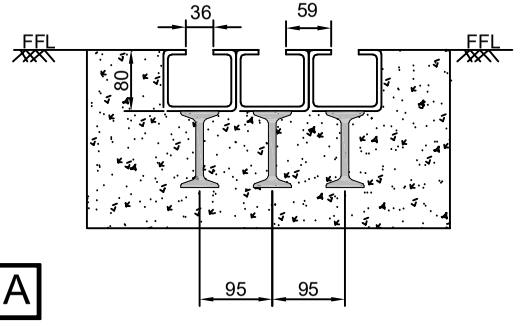

Deatil A

Note:--

1. All dimension are in MM
2. All Civil work will be in client scope
3. For 7300mm opening we required exact 2600mm parking space if not there will be opening reduce by 100mm
4. Manufacturing,civil and installation tolerance will be ±10mm
5. Top and Bottom track should be in parallal within ±3mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:- 3LEAF RIGHT SIDE CRM DOOR 03				NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	DATE	SIGN	
DRAWN	SUJATA	26/04/2022		CLIENT - LESTECH
CHECK	M.SUTAR	26/04/2022		LOCATION - POSCO MANGAON
APPRD.	V.TARAK	26/04/2022		PRODUCT - SLIDING DOOR
If any queries contact : design@nihva.com				DWG NO:-NIHVA/22-23/CLT/0015 REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS SCALE:-- 1:1 SHEET: 01 OF 01

Rev No.	Revision	Date	Revised By