**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

**An ISO 9001:2008 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

# NIHVA Sales Quotation

**Address**
Khinvasara headquarter, plot no.16,MIDC chikalthana,
Opposite Airport, Aurangabad- 431007

**Date : 02.10.2019**
Quote NO : SQT.19.20.2093R
**Kind Attn : Mr.Ajay kawdia**
Email Id : ajay@khinvasaragroup.com
Contact No: 9421535777

**Project Name & Location:** Retractable Roof wall mount, Aurangabad

**Subject : Quotation for Retractable Roof wall mount**

Dear Sir,

**Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.**
**This has reference to your above mentioned requirement, please find below our Solutions.**

| Sr. No | Description | Pages |
|---|---|---|
| A. | Commercial Offer | 1 |
| B. | Technical Specification | 2 |
| C. | General Conditions | 3 |
| D. | Terms & Condtions | 3 |

**A) Commercial Offer**

| Sr No | Description | Size | Qty | Supply and Installation Charges in INR | |
|---|---|---|---|---|---|
| | | | (Nos) | Unit Price | Total Amount |
| 1 | Retractable Roof -Meditation Room | (w)6700mm x (L)5400mmx(H)1000mm 3 Segment | 1 | 6,50,000 | **6,50,000** |
| 2 | Retractable Roof -Central Courtyard | (w)6200mm x (L)7600mmx(H)1000mm 3 Segment | 1 | 8,20,000 | **8,20,000** |
| 3 | Retractable Roof -Hobby Room | (w)2000mm x (L)6600mmx(H)900mm 3 Segment | 1 | 5,70,000 | **5,70,000** |
| 4 | Retractable Roof - AV Roof | (w)2000mm x (L)6000mmx(H)900mm 3 Segment | 1 | 5,55,000 | **5,55,000** |
| | | **Total** | | | **25,95,000** |
| | | **P&F 3%** | **3%** | | **77,850** |
| | | **Total Without Taxes** | | | **26,72,850** |
| | | GST Extra @ 18% | 18% | | 4,81,113 |
| | | **Total With Taxes** | | | **31,53,963** |
| 5 | | Transportation Charges | | | **75,000** |


NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

| |
|---|
| 1. Polycarbonate SABIC Make compact clear/Embossed 4.0 mm Thick |
| 2. Profile : Powder Coated AL Frame (As per RAL colour ) |
| 3. Guide : Annodized AL Guide |
| 4. Interlocking |
| 5. Motors with Remote Control<br>a) Single Phase Bi-directional Motor<br>b) Speed- 09-12m/min<br>c) Power- As per Roof Dimension<br>d) Mechanical Limit Switch<br>e) Rack and Pinion Arrangement -Z16/Molude4/Module6<br>f) Italian Make BFT Brand |
| 6. Control Panel |

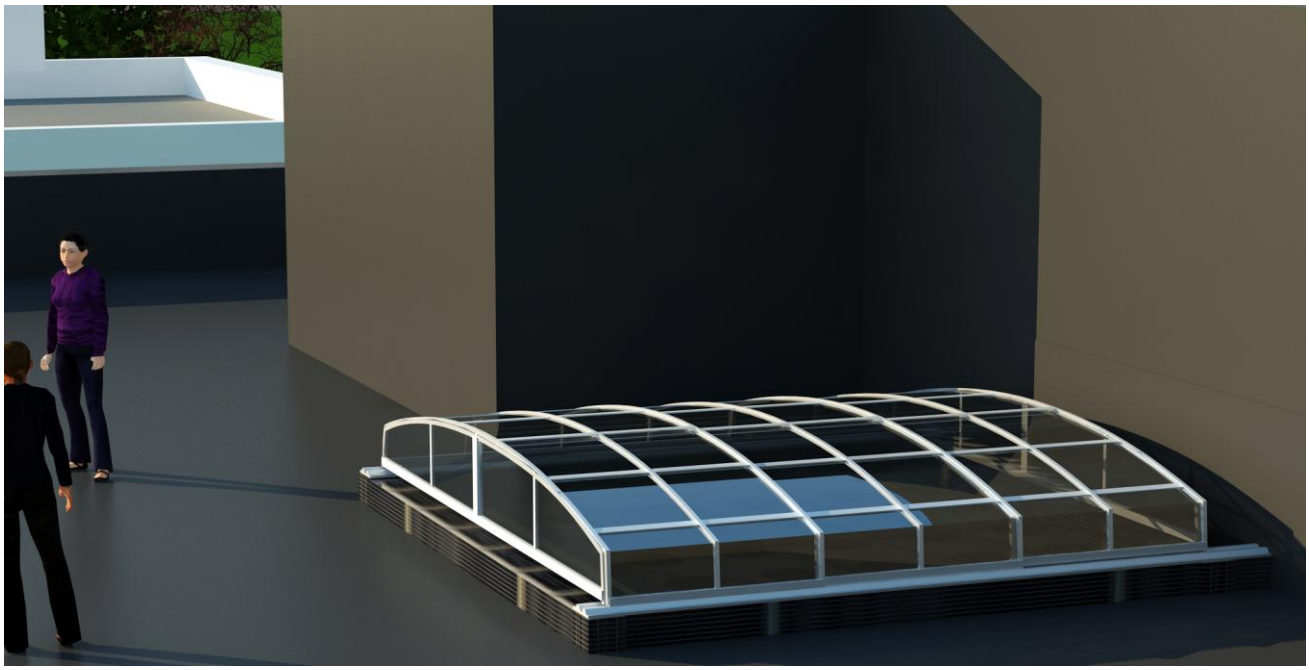

**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

**An ISO 9001:2008 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**C) General Conditions**

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

**Note: Please find below List which are in Client Scope**

| Sr. No | Description | Remark |
|---|---|---|
| 1 | Secured and fully covered Store area to keep the material | In Client Scope |
| 2 | Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site | In Client Scope |
| 3 | Electrical Supply on the site single phase/three phase points at different places. | In Client Scope |
| 4 | Any civil / masonry/structural work required | In Client Scope |
| 5 | All structure support required | In Client Scope |
| 6 | In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage. | In Client Scope |
| 7 | Conduits, Cables required | In Client Scope |

**D) Terms & Conditions**

**Price** : Ex Works Pune

**Delivery** : 6 - 7 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

**Payment** : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

**Validity** : Validity of Offer is 15 days from the date of quotation

**Warranty** : 12 months from the date of supply , 10 years warranty for polycarbonate sheets and 5 years on powder coated AL Profile.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Gaurav Jain on 9766015333**

With Best Regards
Yogita
8208334981
For NIHVA Technologies Pvt Ltd