**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

# NIHVA Sales Quotation

**Om Logistics Ltd.**
Delhi

**Date :** 13.03.2021
**Quote NO :** SQT.20.21.3098
**Kind Attn :** Chetan Sharma
**Email Id :** purchase1@omlogistics.co.in
**Contact No:** 9899914529

**Project Name & Location:** Delhi

**Subject : Quotation for Edge of Dock Leveler _Manual**

Dear Sir,

**Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.**


| Sr. No | Description | Pages |
|---|---|---|
| A. | Commercial Offer | 1 |
| B. | Technical Specification | 2 |
| C. | General Conditions | 3 |
| D. | Terms & Condtions | 3 |


**A) Commercial Offer -**

| Sr No | Description | Platform Size | | Qty | Ex Work Pune-Supply Charges in INR | | Installation Charges in INR | |
|---|---|---|---|---|---|---|---|---|
| | | Clear Width (mm) | Clear Length (mm) | (Nos) | Unit Price | Total Amount | Unit Price | Total Amount |
| 1 | **Edge of Dock Leveler _Manual , Capacity -6 Ton** | 1830 | 705 | 15 | 65,000 | 975,000 | 10,000 | 150,000 |
| | | | | **Total** | | **975,000** | | **150,000** |
| | P&F Charges | | | 3% | | **29,250** | | |
| | **Total Without Taxes** | | | | | **1,004,250** | | **150,000** |
| | GST Extra @ 18% | | | 18% | | 180,765 | | 27,000 |
| | **Total With Taxes** | | | | | **1,185,015** | | **177,000** |
| | Transportation Charges | | | | | **Extra at actual** | | |
| | Unloading Charges @ Site | | | | | **In client scope** | | |


**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019


**An ISO 9001:2015 Certified Company**


**GST Pune : 27AAECN0437H1ZM**

**B) Technical Specification**

**Edge of Dock Leveler _Manual**

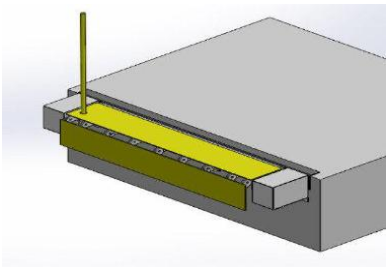



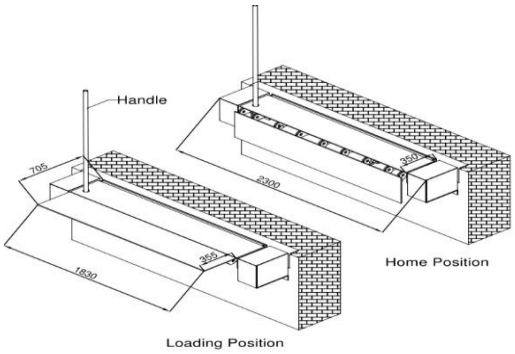


| Sr .No. | Specification | Specifications |
|---|---|---|
| 1 | **Capacity** | 6 TON |
| 2 | **Platform Size (W x L)** | 1830 (W) x 705 (L) mm |
| 3 | **Overall length** | 2300 mm |
| 4 | **Lip Size** | 1830 x 350 mm |
| 5 | **Working range** | 100 mm Up Down |
| 6 | **Operation** | Manual |
| 7 | **Mounting** | Fixed on Edge Angle Support |
| 8 | **Rubber Bumper** | 200 X 200 X 100 |

**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

**An ISO 9001:2008 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**C) General Conditions**

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

**Note: Please find below List which are in Client Scope**

| Sr. No | Description | |
|---|---|---|
| 1 | Secured and fully covered Store area to keep the material | In client scope |
| 2 | Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site | In client scope |
| 3 | Electrical Supply on the site single phase/three phase points at different places. | In client scope |
| 4 | Any civil / masonry/structural work required | In client scope |
| 5 | All structure support required | In client scope |
| 6 | In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage. | In client scope |
| 7 | Conduits, Cables required | In client scope |

**D) Terms & Conditions**

**Price** : Ex Works Pune

**Delivery** : 4-5 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

**Payment** : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

**Validity** : Validity of Offer is 15 days from the date of quotation

**Warranty** : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Ravindra Kharat on 07410169333**

**With Best Regards**
Pradeep Shinde
8551096333
For NIHVA Technologies Pvt Ltd