NIHVA TECHNOLOGIES PVT. LTD.

Sales Quotation

Quotation No - SQT/17-18/0085R1/2 **Date : 10-02-2018**

Millennium Semiconductors Pvt Ltd
Plot No C-42, MIDC Area Ph1 Chakan
Pune maharashtra

Kind Attn : Mr. Rajesh Kulkarni
Email : Rajesh@millenniumsemi.com
Contact No : 9689899927

Subject : Quotation for Conveyor System with internal Lift option

Dear Sir

Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication; please find below our best offer.

Commercial Offer

Sr.No	Description	Qty	Unit	Rate In INR	Net Amount INR
	OPTION 2				
A	**Outbound Conveyor Line For Basement**				
1	**Straight Material Conveyor**	**1**	**No**	**5,64,000**	**5,64,000**
	• Length Of Conveyor : 22.56 meter				-
	• Width Of Conveyor : 0.8 meter				-
	• Motorised				-
2	**90 Deg Bend Conveyor**	**1**	**No**	**49,250**	**49,250**
	• Length Of Conveyor : 1.97 meter				
	• Width Of Conveyor : 0.8 meter				
3	**Roller Idler Conveyor**	**1**	**No**	**2,66,750**	**2,66,750**
	• Length Of Conveyor : 10.67 meter				-
	• Width Of Conveyor : 0.8 meter				-
4	**Material Lift Conveyor**	**1**	**No**	**91,500**	**91,500**
	• Length Of Conveyor : 3.66 meter				-
	• Width Of Conveyor : 0.8 meter				-
5	**Motor 3HP**	**4**	**No**	**75,000**	**3,00,000**
6	**Hand Held Scanner**	**2**	**No**	**45,000**	**90,000**
7	**Lift For 3 Floors**	**2**	**No**	**17,30,000**	**17,30,000**
A	**Total For Above System**	**1**	**Set**		**30,91,500**
B	**Inbound Conveyor Line For Basement**				
1	**Straight Material Conveyor**	**1**	**No**	**4,27,500**	**4,27,500**
	• Length Of Conveyor : 17.10 meter				-
	• Width Of Conveyor : 0.8 meter				-
	• Motorised				-
2	**Inclined Conveyor**	**1**	**No**	**91,500**	**91,500**
	• Length Of Conveyor : 3.66 meter				-
	• Width Of Conveyor : 0.8 meter				-
3	**90 Deg Bend Conveyor**	**1**	**No**	**49,250**	**49,250**
	• Length Of Conveyor : 1.97 meter				
	• Width Of Conveyor : 0.8 meter				
4	**Taper Connection Conveyor**	**1**	**No**	**49,500**	**49,500**
	• Length Of Conveyor : 1.98 meter				-
	• Width Of Conveyor : 0.8 meter				-
5	**Decline Belt Conveyor**	**1**	**No**	**68,500**	**68,500**
	• Length Of Conveyor : 2.74 meter				
	• Width Of Conveyor : 0.8 meter				

6	**45 Deg Conveyor**	**1**	**No**	**24,500**	**24,500**
	• Length Of Conveyor : 0.98 meter				
	• Width Of Conveyor : 0.8 meter				
7	**Roller Rejection Conveyor**	**1**	**No**	**76,200**	**76,200**
	• Length Of Conveyor : 3.048 meter				
	• Width Of Conveyor : 0.8 meter				
8	**Material Lift Conveyor**	**1**	**No**	**91,250**	**91,250**
	• Length Of Conveyor : 3.65 meter				
	• Width Of Conveyor : 0.8 meter				
9	**Pushers**	**8**	**Nos**	**25,000**	**2,00,000**
10	**Barcode Reader & Scanner**	**3**	**Nos**	**4,20,000**	**12,60,000**
12	**Lift For 3 Floors**	**2**	**Nos**	**17,30,000**	**17,30,000**
B	**Total For Above System**	**1**	**Set**		**40,68,200**
C	**Conveyor Line For First/Second/Third Floor**				
1	**Straight Material Conveyor**	**3**	**No**	**13,10,500**	**39,31,500**
	• Length Of Conveyor : 52.42 meter				
	• Width Of Conveyor : 0.8 meter				
	• Motorised				
2	**Inclined Conveyor**	**3**	**No**	**3,35,250**	**10,05,750**
	• Length Of Conveyor : 13.41 meter				**-**
	• Width Of Conveyor : 0.8 meter				
3	**Decline Idler Conveyor**	**3**	**No**	**1,48,500**	**4,45,500**
	• Length Of Conveyor : 5.94 meter				**-**
	• Width Of Conveyor : 0.8 meter				**-**
	• Belt Type : Roller Belt				**-**
4	**90 Deg Conveyor**	**3**	**No**	**98,250**	**2,94,750**
	• Length Of Conveyor : 3.93 meter				
	• Width Of Conveyor : 0.8 meter				
5	**Pushers**	**12**	**Nos**	**25,000**	**3,00,000**
6	**Barcode Reader & Scanner**	**15**	**Nos**	**4,20,000**	**63,00,000**
7	**Hand Held Scanner**	**9**	**Nos**	**45,000**	**4,05,000**
8	**Stoppers For Conveyors**	**9**	**Nos**	**25000**	**2,25,000**
C	**Total For Above System**	**1**	**Set**		**129,07,500**

Total Cost Of Above Project	**1**	**Set**		**200,67,200**
Integration Cost For Above System	**1**	**Set**		**10,03,360**
Installation Charges For Above System	**1**	**Set**		**10,03,360**
				220,73,920

GST PUNE:	**27AAECN0437H1ZM**

Amount In Words	**Rupees Two Cr. Twenty Lacs Seventy Three Thousand Nine Hundred & Twenty Only**

Images Attached For Reference :

1.Motorised Roller Conveyor

A roller conveyor is used for routing isolated loads (Boxes, containers,Cartons Etc) The rollers are driven by flat or cylindrical belts or by chains.The Machine can be Accommodate switches



2.Gravity Conveyor

Gravity Conveyors are the most economical and common method of conveying unit loads.The conveyors are typically mounted on a sight decline angle,therefore using gravity to assist product movement.




3.Pushers

The pushers provides high-speed automatic product diversion.



4.Barcode Reader & Scanner

For Automatic Scanning & Reading Operation.

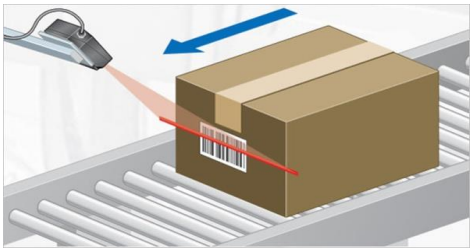

5. Hand Held Barcode Reader

It is used for Easy Scanning & Reading Operation



6. Diverters

Fixed & Powered Face diverters to help the product move where it needs to be on the conveyor belt



The supply included only those mentioned in the quote & does not include

1 Unloading from truck placement on site

Terms and Conditions :

1	**Price**	:	Ex. Works Pune
2	**P & F Charges**	:	3% Extra
3	**Freight Notes**	:	Extra as applicable
4	**Delivery**	:	9-10 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing
5	**Payment**	:	80% advance along with confirm Purchase Order & balance before dispatch
6	**Insurance**	:	Extra if applicable
7	**Tax**	:	GST: Extra as applicable at the time of delivery
8	**Validity**	:	Validity of Offer is 15 days from the of quotation
9	**Warranty**	:	12 Months from the date of supply

Please feel free to Contact **Mr. Mayur Derle** on **7709209333** For any further Clarification /Information in this Concern.

With Best Regards

Pooja Badre
7709586333
For Nihva Technologies Pvt Ltd