





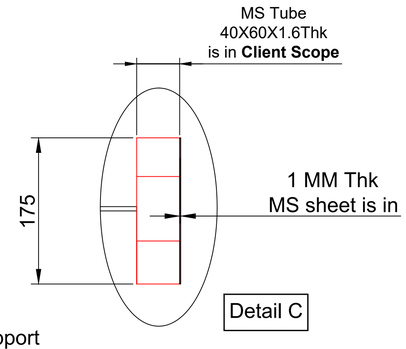

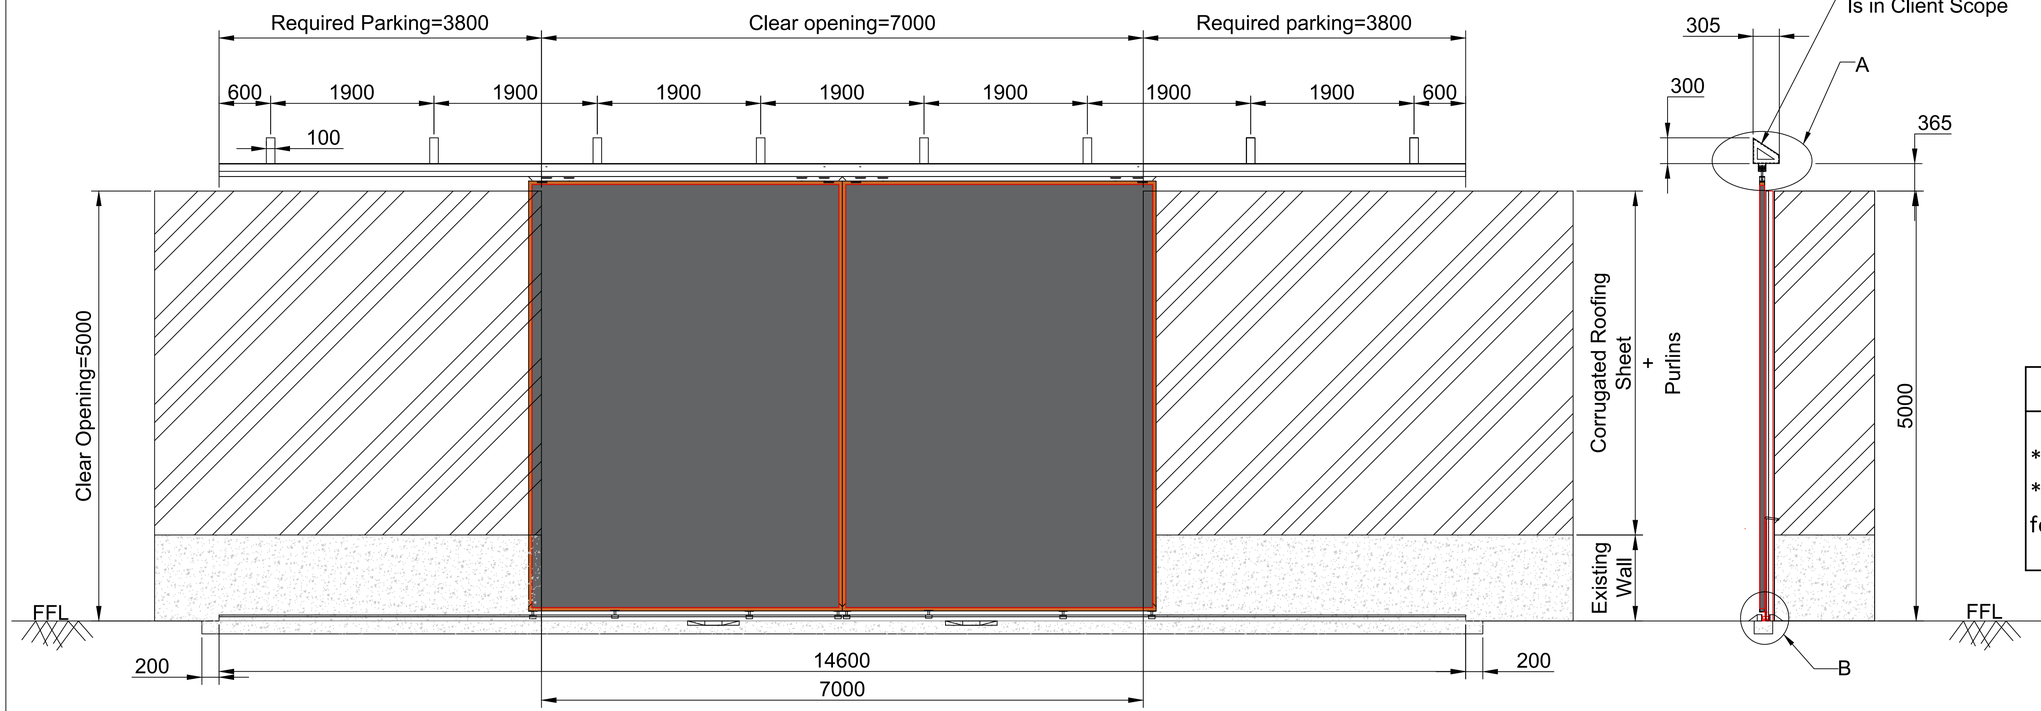

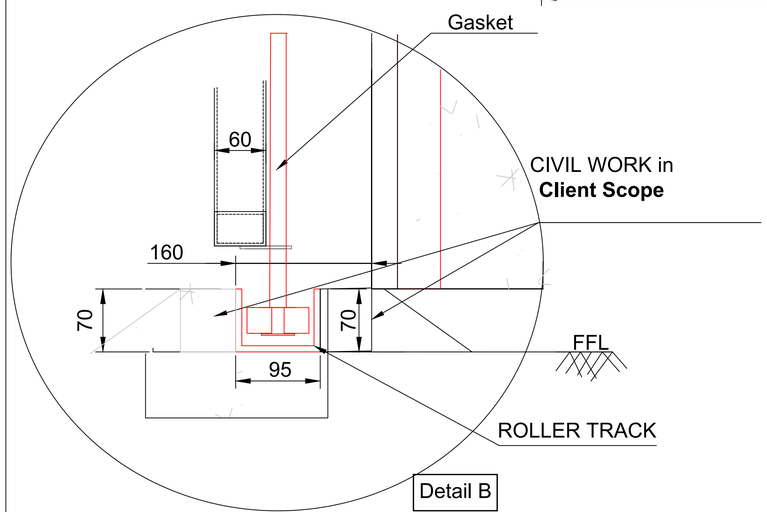

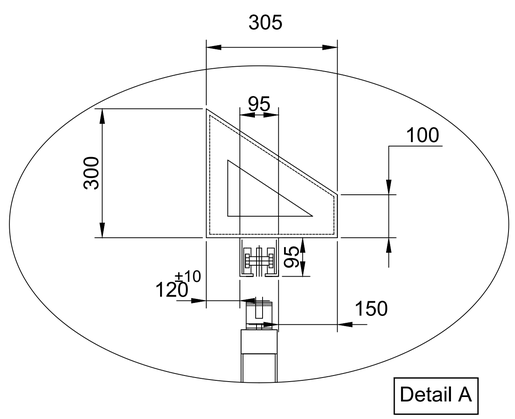

Client scope
*Roof need to be shift at top 365mm. *Civil foundation need to be done for tracks

Color code	Color
5018	Turquoise blue

Note:--

1.All dimension are in MM
2.All Civil work will be in client scope
3.Manufacturing,civil and installation tolerance will be ±10mm
4.Top and Bottom track should be in parallal within ±3mm
5.Civil work - concrete Base will be in client scope at both side of door
6.Bottom track to be bolted on concreate
7.Nihva Supervisor on site for Monitoring/Checking of civil work

	Revision	Date	Revised By

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:-2 LEAF-BOTH SIDE
CRM DOOR-14 / GATE NO. 18

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES
PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	SIGN
DRAWN	M.SUTAR	20/05/2022	
CHECK	M.SUTAR	20/05/2022	
APPRD.	V.TARAK	20/05/2022	

CLIENT - LESTECH
LOCATION - POSCO MANGAON
PRODUCT - SLIDING DOOR - OVERHEAD

If any queries contact : design@nihva.com
DWG NO:-NIHVA/22-23/CLT/0045
REV- 0
ALL DIMENSION ARE IN mm
SCALE: NTS
SCALE:-- 1:1
SHEET: 01 OF 01