



PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2250	2870	485	

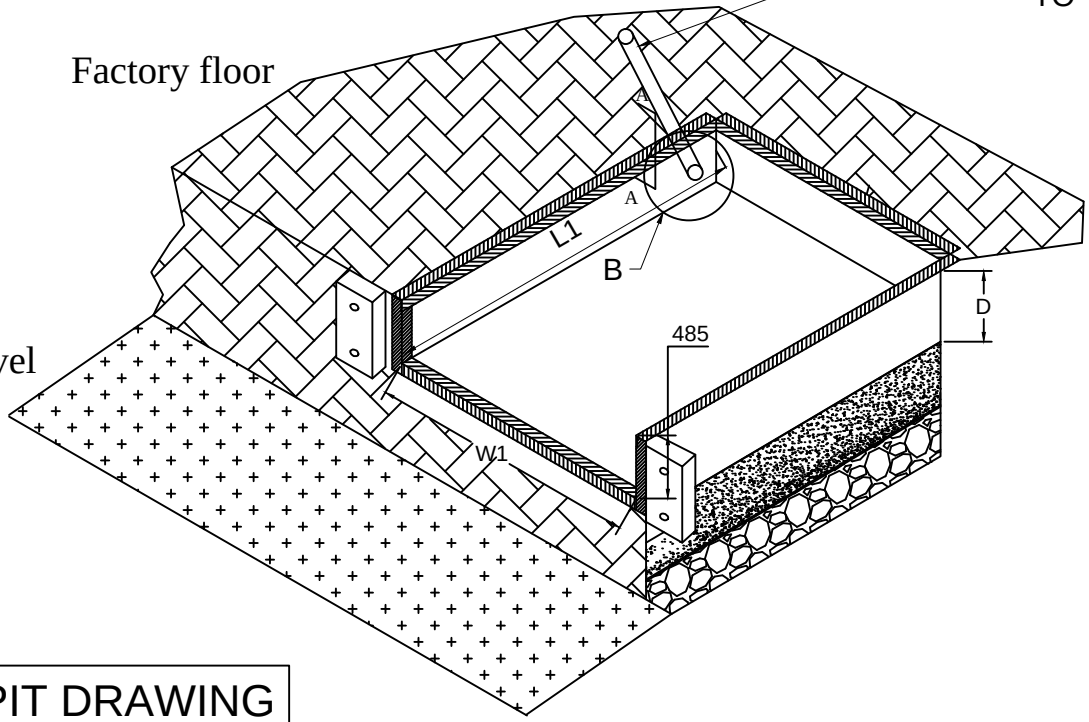

PIT DRAWING

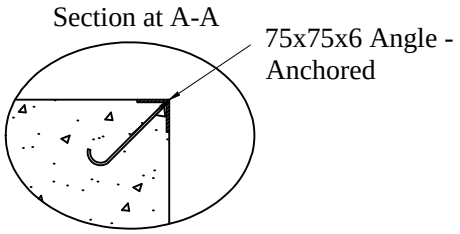



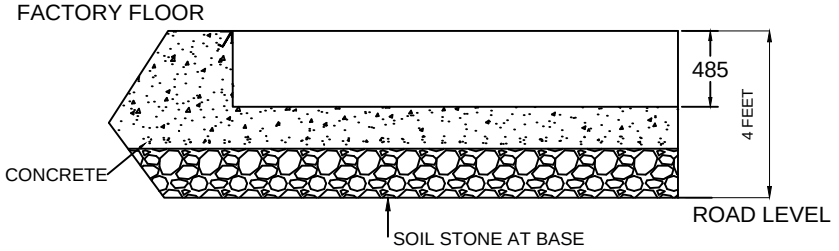

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST **12000 KG** FLOOR LOADING

CLIENT APPORVAL-			NIHVA TECHNOLOGIES PVT. LTD.
	DATE	SIGN.	
DRAWN :- OMKAR	30/08/2016		CLIENT - BAJAJ AUTO LIMITED
CHECKED :- ANIL	30/08/2016		PROJECT - BAJAJ AUTO LIMITED
ALL DIMENSION ARE IN mm			SITE -
If any queries contact : projects@nihva.com			DWG. NO. - NIHVA/16-17/0064

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com