NIHVA TECHNOLOGIES


WEIGHT ESTIMATION SHEET

CLIENT	Bramhacorp	DATE	08-05-2024
PROJECT	Sliding Gate	LOCATION	Pune
FINISH SIZE	3900 mm x2400 mm	PREPARED BY	Sumit

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (3730 mm X 2350 mm)	Tube - Outer Frame	MS	7.85		100	50	2.5	13100	mm	1	75	1118
		Vertial Tube	MS	7.85		100	50	2.5	183300	mm	1	1043	Weight OF leaf
2		Post	MS	7.85						No's	4	80	
3	Bottom	Bottom Wheel	MS							No's	2		
		Sliding Roller	Nylon							No's	8		
		En8 Bar	En8	7.85	25				8.5	m	1	34	
4		Manual Lock								No's	1		
		Handle								No's	1		
										Weight For Required Qty	1	1232	
										Weight Including Safety Factor	1.5	1848	

CD between 2 M.S Tube = 50mm

REFERENCE IMAGE

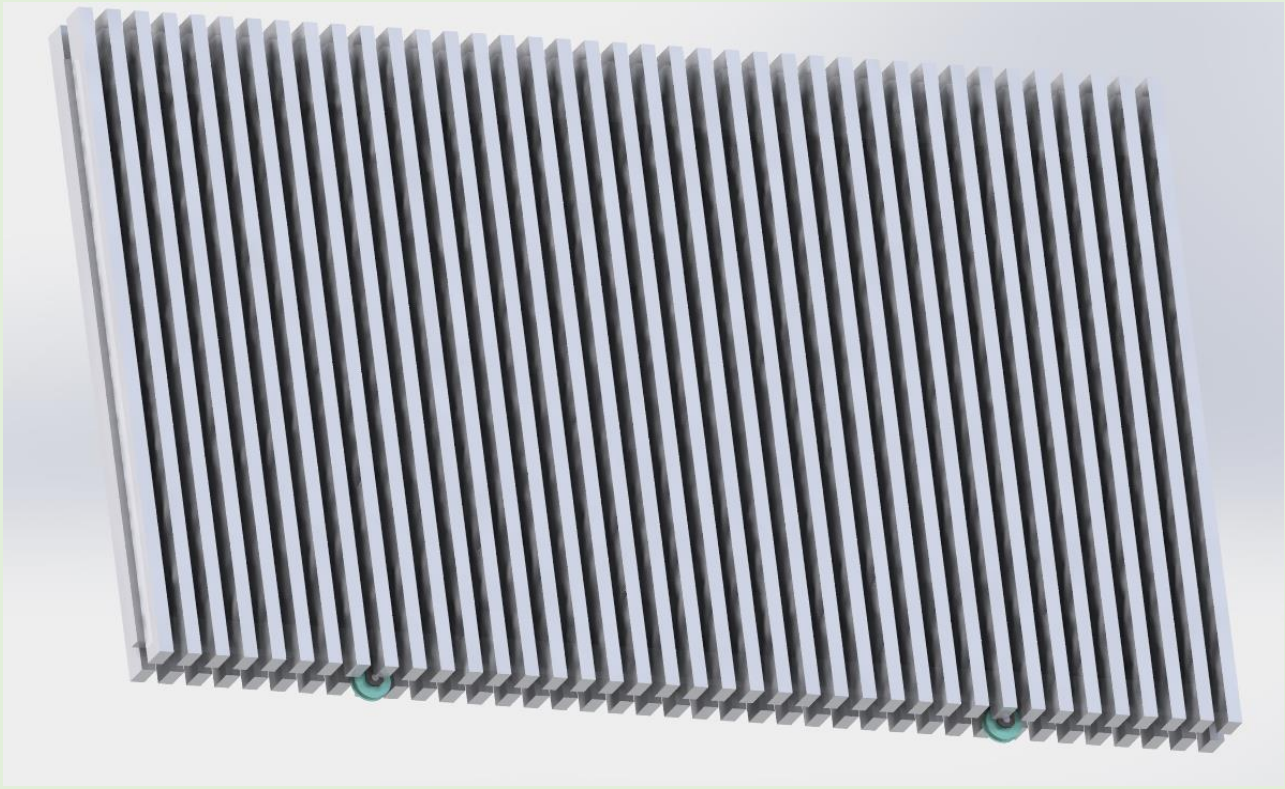

NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	Bramhacorp	DATE	08-05-2024
PROJECT	Sliding Gate	LOCATION	Pune
FINISH SIZE	3900 mm x 2400 mm	PREPARED BY	Sumit

SR	DESC	DETAILS	MATERIAL GRADE	SP.GRAVITY	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (3730 mm X 2350 mm)	Tube - Outer Frame	Aluminium	2.71		100	50	2.5	13100	mm	1	26	390
		Vertial Tube	Aluminium	2.71		100	50	2.5	185640	mm	1	365	Weight OF leaf
2		Post	M.S	7.85						No's	4	80	
3	Bottom	Buttom Wheel	M.S							No's	2		
		Sliding Roller	Nylon							No's	8		
		En8 Bar	En8	7.85	25				8.5	m	1	34	
4		Manual Lock								No's	1		
		Handle								No's	1		
										Weight For Required Qty	1	504	
										Weight Including Safety Factor	1.5	757	

CD between 2 M.S Tube = 50mm

REFERENCE IMAGE

