NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD.


187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

Contact Person: Mr. Mayur Derle
Mob No.: 7709209333
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

AUTOMATION SOLUTION-DIVISION

Ordnance Factory- Tail Unit Assembly

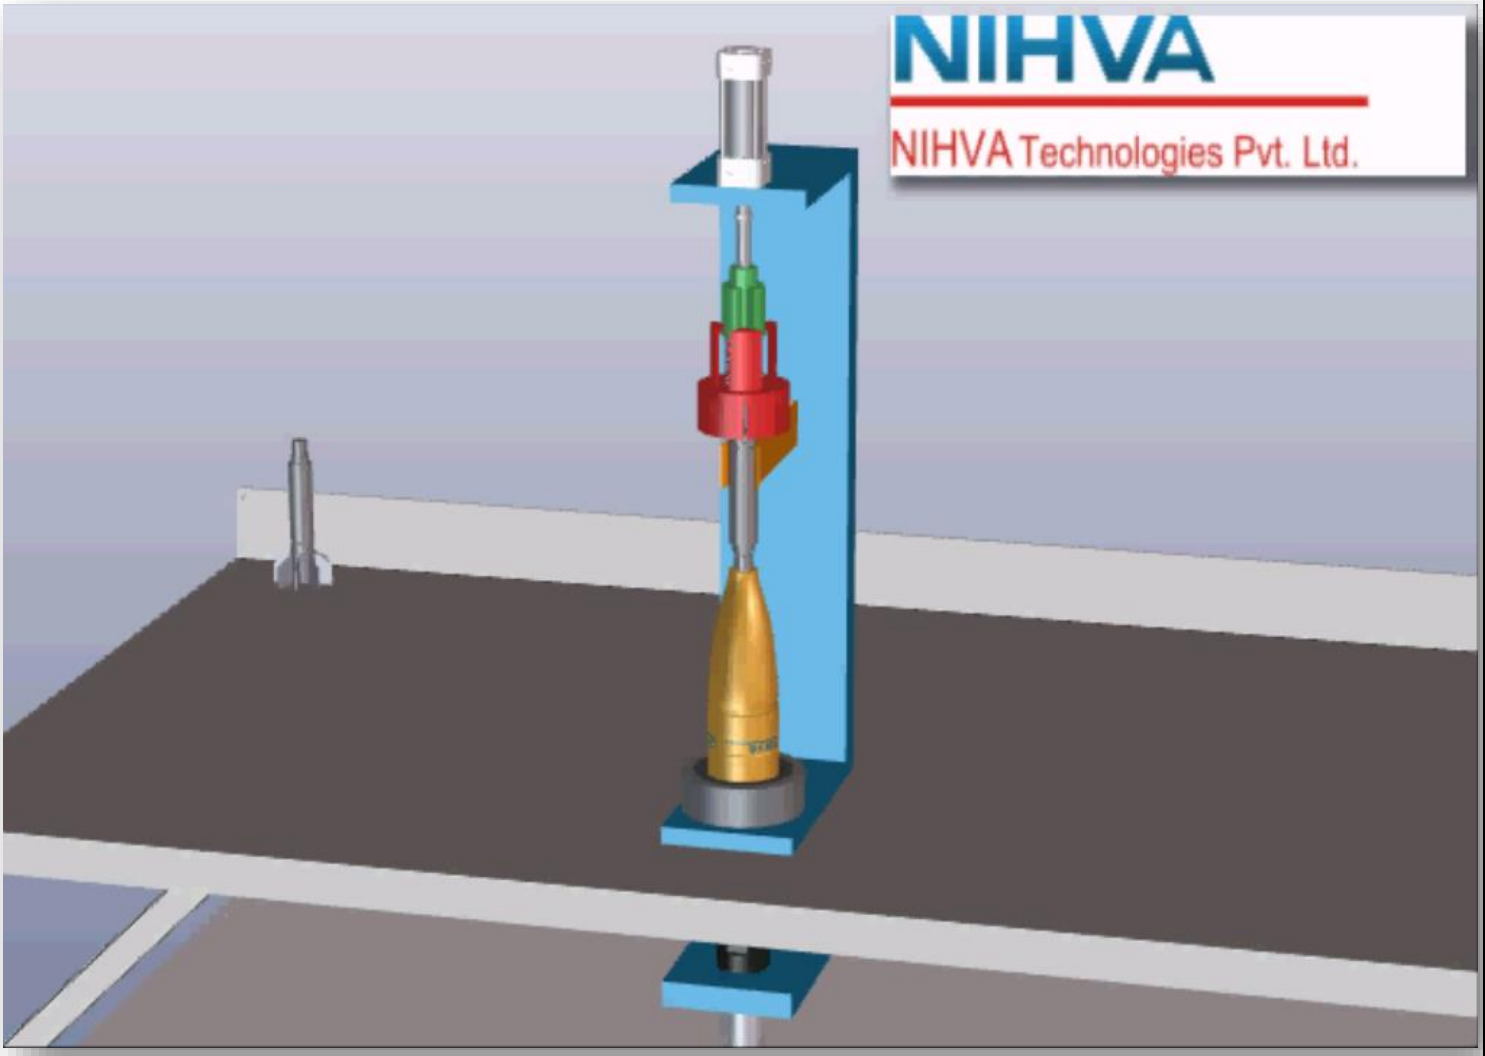

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Date: 27.07.2017

To,

Ordnance Factory
Dehuroad, Pune-412101

Kind Attention: Mr. T.K. Panda

Dear Sir,

Thank you for giving us an opportunity to participate with our offer onthe above project. We enclose here with our proposal includes:

- Requirement
- Scope of Works
- Drawing, Training & warranty
- Details of Application
- Commercial
- Technical Specification
- Terms & conditions

❖ Requirement

A. **Energy efficient Design:** The system should be energy efficient. The design shall ensure minimum possible power.

B. **Reduced Manpower:** All the operations will perform by machine automatically, except placing of tail to the headstock and removing of ready shell. So this system will require minimum labour work.

❖ Scope of work:

The scope of work shall be exclusively on Tail Unit Assembly. This includes following work.

1.Material handling will be done manually.
2.Tail unit will be placed manually into the headstock & shell into the cavity as spring inserted condition.
3. After that tightening of tail to the shell & spring Pressing will done automatically.
4. After tightening of tail the ready shell will remove from cavity by worker.

For the above scope, following set of activities are expected to be performed:

NIHVA Automation Services Scope of supply:

Tail Assembly System Includes following:

- Design
- Manufacturing
- Successful Trails at ourend
- Dispatch at your ends.
- Installation & Commissioning @ **ORDNANCE FACTORY DEHURAOD**
- Operator & Maintenance Training.
- Warranty of the equipment for 1 year from commissioning date.
- Hard & Soft Copy of Operator & Maintenance Manual

❖ Drawing:

We will issue a full set of shop drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

❖ Training:

After installation of the automation system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

❖ Warranty:

The warranty period is twelve months from the date of installation and commissioning.

If a defect arises within the warranty period stated, which is attributable to faulty design, materials or installation workmanship the product will be repaired at our discretion without charge. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

❖ Maintenance & Service Agreement:

We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

❖ Details of Application:



Concept Image of Shell

- **Components Details**

1. Work piece Description: - **Shell & Tail**
2. Weight: - 4 **kg approx.**
3. Diameter: **- 81 mm**

❖ Commercial:

Tail Unit Assembly

Sr. No	Description	Qty	Price in INR/Each	Total Amount In INR
1.	Fixture, Make- NIHVA	1 set	5,60,000	5,60,000
2.	Servo Motor (with flame protection)			
3.	PLC Make – Delta			
4	Flameproof PLC Panel Make – NIHVA			
5.	HMI , Make – Delta			
6.	Pneumatic Cylinder			
7	Pneumatic Circuit			
8.	Installation Charges For above	1	15,000	15,000
9.	Transportation Charges	1	5,000	5,000
	Total Amount			5,80,000

GST PUNE	27AAECN0437H1ZM
GST GUJRAT	24AAECN0437H1ZS

Amount in Words
Rupees Five Lacs Eighty Thousand Only

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

❖ Technical Specification:

- **PLC, Make- Delta**



- **Servo Motor,**



- **HMI, Make- Delta**



- **Pneumatic Cylinder**



NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

❖ **Safety features**

1. In case of sudden power cut off, system will stand as it is until reset.
2. FEA will be conducted for critical elements.
3. Secondary Safety chain catch to prevent accidental drop off.
4. Test Certificate will be provided for whole system.

❖ **Terms and Conditions:**

1. **Price:** Ex. Works Pune
2. **P & F Charges:** Included in above price.
3. **Freight Notes:** Included in above price.
4. **Delivery: within** 7-8 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5. **Payment :**80% Advance along with Confirmed Purchase Order & Balance before dispatch.
6. **Insurance: Extra** as applicable.
7. **Tax: GST:** 28% on total supply value.(as applicable)
8. **Validity :**15 days from the date of quotation.
9. **Warranty :**12 Months from the date of supply.

Please feel free to Contact **Mr. Mayur Derle on 7709209333** For any further Clarification in this Concern.

With Best Regards
Pooja Badre
7709586333
For NIHVA Technologies Pvt Ltd