S P WIRES

Manufacturers Of: G.I. & P.V.C. Chain link, G.I. Barbed wire, Razor Type Concertina Coil Barbed Wires, M.S. Compound Angles & Cement, Concrete Compound Pole, J Hooks, U Nails & Quarter pin

We Install All Types Of Compound Works

Ref: SPW/21 - 22

Quotation

To: M/s Nihva Technologies Pvt. Ltd.
Kind Att.: Mr. Dnyaneshwer Kumbhar
Site: Pune
Contact No.: 9168940333
Email ID: procurement@nihva.com / purchase@nihva.com / amit.kurhade@nihva.com
Sub. : Quotation for Compound Work


Respected Sir,

As per our discussion with you, we will quote our best rates and details of compound work

A) **MS Angel 40mm/5mm 80" inch** ready for compound work including cutting, Paint & Labor Charges. Compound Angel erected 1 ½' x 1 ½' x 20" inch pits on C:C 2.5mtr with 2 no support angel on every 8 angels, corner & as an when and where is require grouted Angel with good quality concrete.
G I Chain link 50mm x 10swg size fixing **5' feet height** with **6mm bar** vertical, top & bottom welding.

Above mentioned work the rate are per running feet Rs.**450.00**

Approx.500Rft x Rs.450.00 = Rs.225000.00

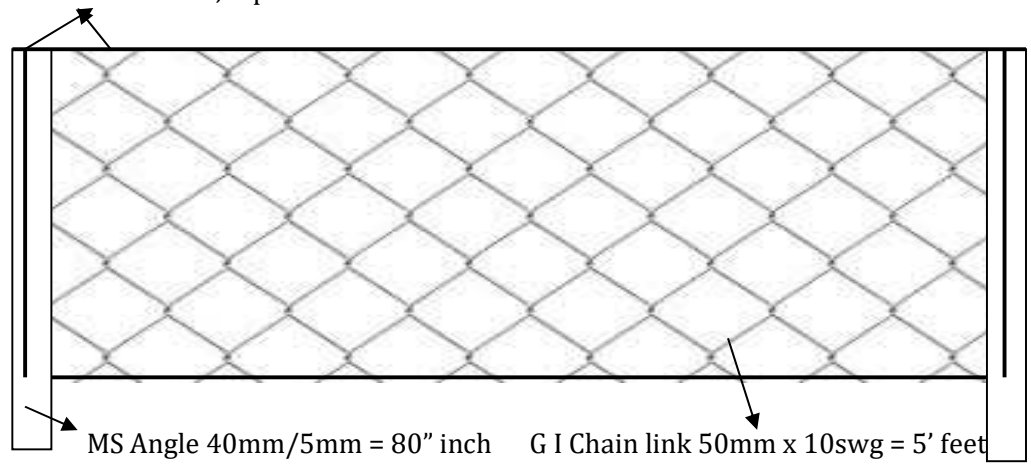

Terms & Conditions:

1) GST 18 % Extra on above rate.
2) Transport Charges Including on above rate.
3) Payment 50% Advance with P O & Balance payment after complitation work
4) Labor will be charges when there is no work for Labor on site due to any litigation
   (Per Labor per day's Rs.700.00 Charges extra)
5) Plot cleaning charges extra on above rate.
6) Quotation Validity a week only

We quoted our best & competitive rates & hopes to your positive remarks

Add: S No. 116/6, C/o Sada Vasant Bahar Nursary, Walhekarwadi, Chinchwad Pune – 411033.
Contact No. **Mr. Sandeep 9422327021 & 9011036339**
Web site: www.spwires.com & www.compoundwala.com