NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Address
Khinvasara headquarter, plot no.16,MIDC chikalthana,
Opposite Airport, Aurangabad- 431007

Date : 04.10.2019
Quote NO : SQT.19.20.2093R
Kind Attn : Mr.Ajay kawdia
Email Id : ajay@khinvasaragroup.com
Contact No: 9421535777

Project Name & Location: Retractable Roof wall mount, Aurangabad

Subject : Quotation for Retractable Roof wall mount

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size	Qty	Supply and Installation Charges in INR	
			(Nos)	Unit Price	Total Amount
1	Retractable Roof -Meditation Room	(w)6700mm x (L)5400mmx(H)1000mm 3 Segment	1	6,00,000	**6,00,000**
2	Retractable Roof -Central Courtyard	(w)6200mm x (L)7600mmx(H)1000mm 3 Segment	1	8,00,000	**8,00,000**
		Total			**14,00,000**
		P&F 3%	**3%**	**NIL**	
		Total Without Taxes			**14,00,000**
		GST Extra @ 18%	18%		2,52,000
		Total With Taxes			**16,52,000**
5		Transportation Charges			**Inclusive**


NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

1. Polycarbonate SABIC Make compact clear/Embossed 4.0 mm Thick
2. Profile : Powder Coated AL Frame (As per RAL colour)
3. Guide : Annodized AL Guide
4. Interlocking
5. Motors with Remote Control a) Single Phase Bi-directional Motor b) Speed- 09-12m/min c) Power- As per Roof Dimension d) Mechanical Limit Switch e) Rack and Pinion Arrangement -Z16/Molude4/Module6 f) Italian Make BFT Brand
6. Control Panel

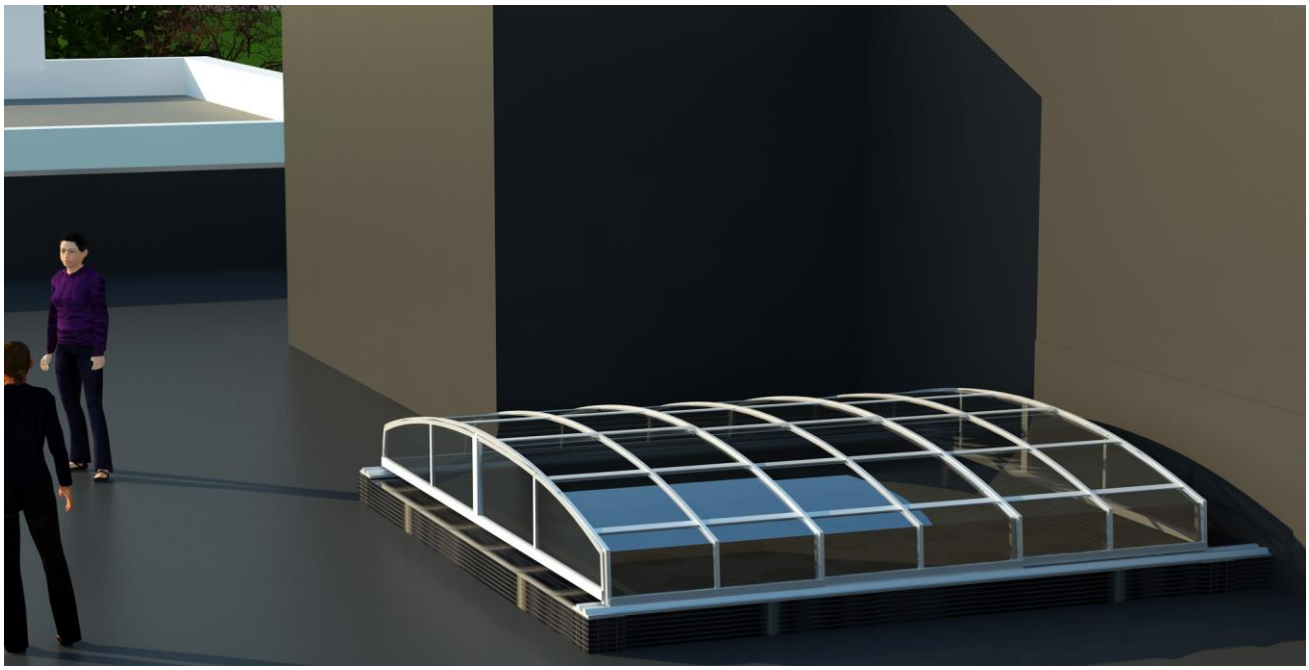

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 6 - 7 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 40% Advance along with Confirmed Purchase Order & Balance 60% agianst dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply , 10 years warranty for polycarbonate sheets and 5 years on powder coated AL Profile.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Gaurav Jain on 9766015333**

With Best Regards
Yogita
8208334981
For NIHVA Technologies Pvt Ltd