



NOTES -

1. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
2. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE -NIHVA WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
3. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR IN CLIENT SCOPE.
4. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY CLIENT.
5. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS IN CLIENT SCOPE.

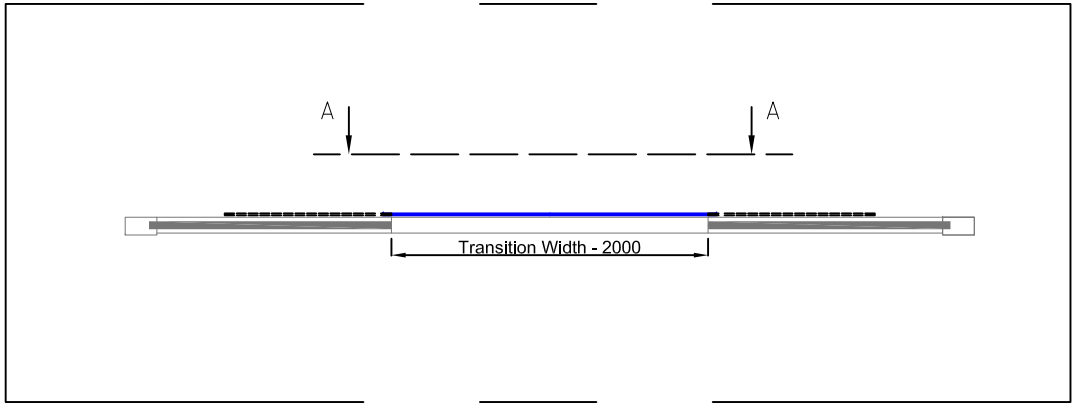

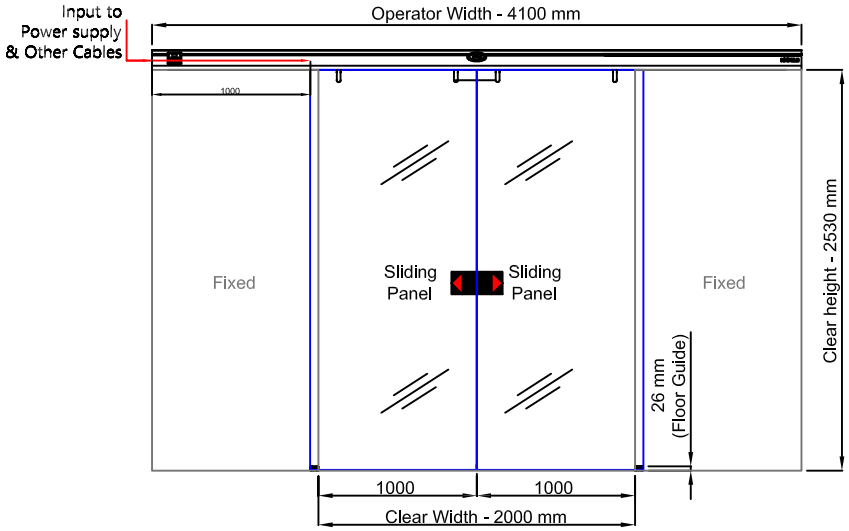

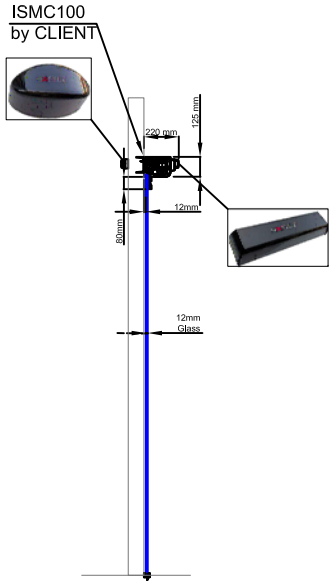

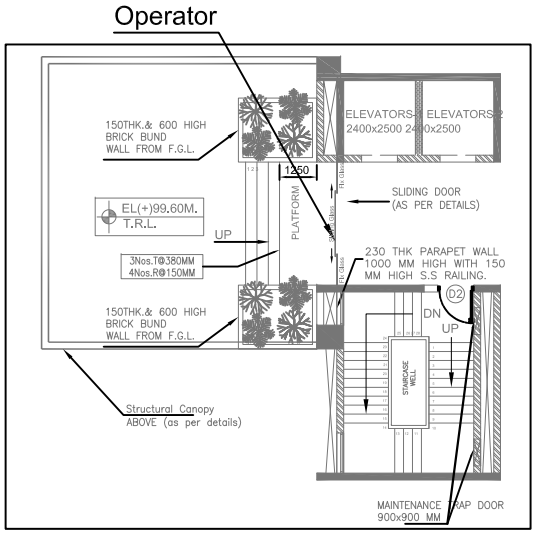

2000	2530	1
CLEAR OPENING WIDTH	CLEAR OPENING HEIGHT	QTY

Elevational View A

SPECIFICATIONS
1. Power - 170-260 V AC 50-60 Hz
2. Weight Carrying capacity - 170kgs for Single leaf,
240kgs for Double leaf.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE		SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD.
AUTOMATIC SLIDING GLASS DOOR				NIHVA TECHNOLOGY PVT. LTD. PUNE
				Website:- www.nihva.com Email:- info@nihva.com Tel : 020 66304033
DRAWN	SIDDHESHWAR		1.1.2021	CLIENT - SEZ BIOTECH SERVICES PVT LTD
CHECK	A.K.		1.1.2021	PROJECT - SEZ BIOTECH SERVICES PVT LTD
APPRD.				SITE - PUNE
ALL DIMENSION ARE IN mm				DWG. NO.-NIHVA/20-21/0119 REV.- 0
If any querfes contact :-projectsupport@nihva.com				SCALE: 01 WT: SHEET: 01 OF 01