

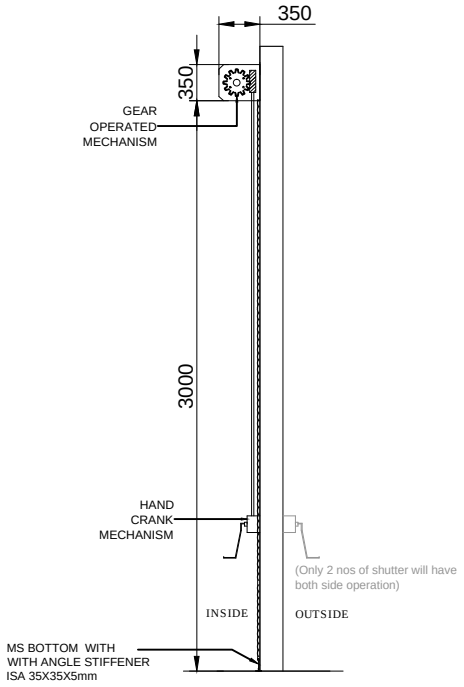



SIDE VIEW

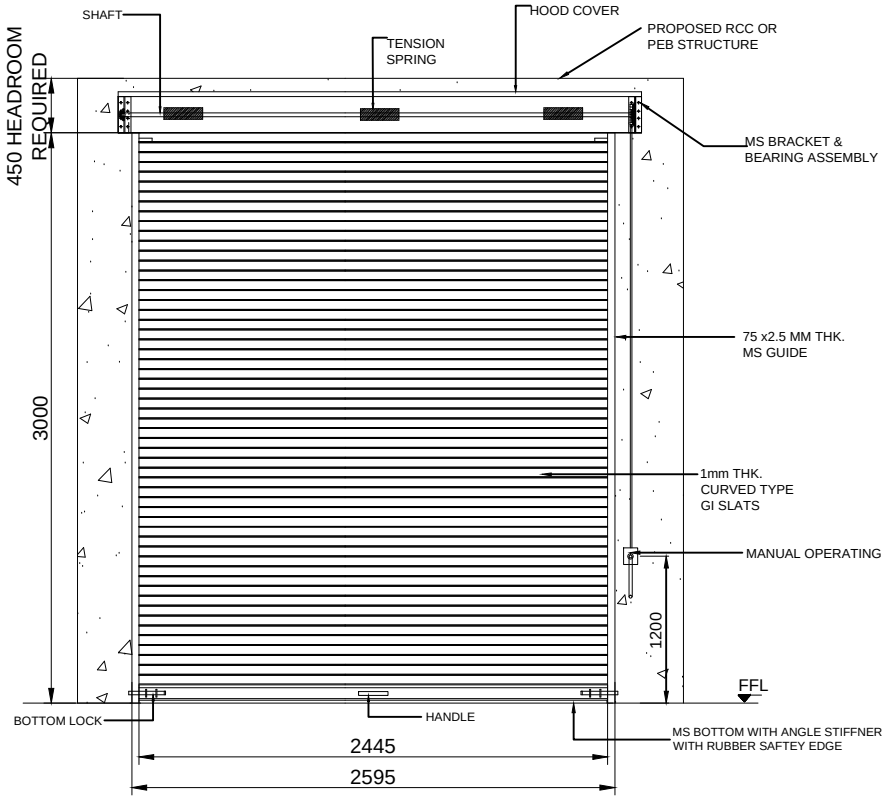

INSIDE ELEVATION

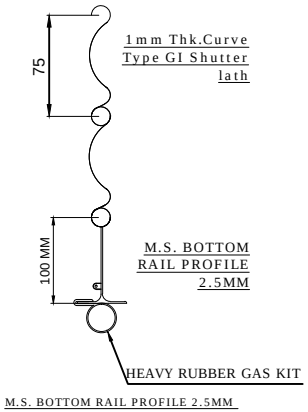

M.S. BOTTOM RAIL PROFILE 2.5MM

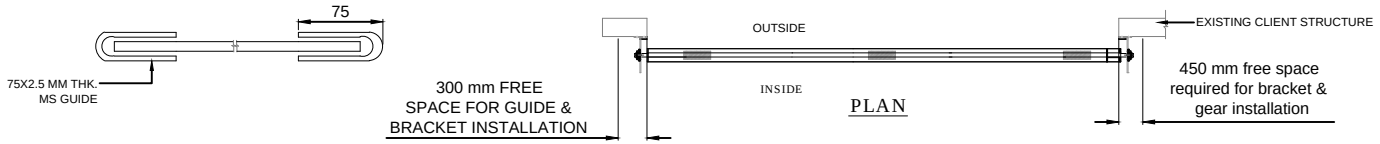

PLAN

S.N.	LOCATION	SIZE	QUANTITY- Right side gearbox
1	B400	2445(W)X3000(H)	07
2	B500	2445(W)X3000(H)	06 (1 nos shutter will have both side operation)
3	B600	2445(W)X3000(H)	05 (1 nos shutter will have both side operation)
TOTAL QTY. OF SHUTTER			18

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.
3.FINAL FINISH OF SHUTTER WILL BE IN POWDER COATING OF APPROVED COLOR i.e.RAL 7001.

TOLERANCE - ±10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	GEAR OPERATED ROLLING SHUTTER 2.445mX3m With Right side gearbox		
	NAME	SIGN	DATE
DRAWN	OMKAR		03.02.2018
CHECK	PRADEEP		03.02.2018
APPRD.	PRADEEP		03.02.2018

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/18-19/VDR/017
REV- 0
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01