TENDER

Automatic & Manual Gate – Supply & Erection

JSW Greentech Plant, Bidkin

Project Location	Bidkin, Aurangabad
Tender / RFQ No.	JSWGT/02/11/GATE/01
Issue Date	11/02/2026
Prepared By	JSW Greentech Limited – Projects & Procurement
Contact	Nitish Vats | 8085751434
Submission Mode	Email

Confidential – © JSW Greentech Limited

Table of Contents

1. Notice Inviting Tender (NIT) / Invitation to Bid 4
2. Instructions to Bidders (ITB) 4
Eligibility: 4
Bidding Method: 4
Pre-bid & Clarifications: 4
Site Visit: 4
Submission: 5
3. Scope of Work 5
Design & Engineering: 5
Fabrication & QA: 5
Supply & Logistics: 5
Installation & Commissioning: 5
Training & Documentation: 5
AMC (2 Years): 5
Current Requirement: 6
1) Main Gate 6
2) Material Entry Gate 6
3) Material Exit Gate 6
4) People Entry & Exit Gate 6
4. Deliverables & Staging 6
Design Stage: 6
Supply Stage: 6
Installation & Handover Stage: 7
5. Technical Requirements & Standards 7
6. Gate Types & Locations 7
7. BOQ / Price Bid Format (to be filled by Bidder) 7
8. Special Commercial Conditions (SCC) 8
9. General Conditions of Contract (GCC) 8
10. Bid Submission Structure & Checklists 8
Technical Bid – Mandatory Documents 9

Confidential – © JSW Greentech Limited

Annexures 10
Annexure A: Site/Location List & Gate Schedule 10
Annexure B: Drawing Register & Submission Matrix 10
Annexure C: Technical Compliance Matrix 10
Annexure D: Price Bid – Detailed Breakup 11
Annexure E: AMC Scope & SLAs (2 Years) 11
Annexure F: Forms & Declarations 12
Detailed Deliverables per Gate 13
A) Main Gate 13
B) Material Entry Gate 14
C) Material Exit Gate 16
D) People/Manpower Entry Exit Gate 16

Confidential – © JSW Greentech Limited

1. Notice Inviting Tender (NIT) / Invitation to Bid

JSW Greentech Limited invites bids from reputed and experienced OEM manufacturers of industrial/security gates or their authorized system integrators for the Automatic & Manual Gate Supply & Erection at the Bidkin Plant. The scope covers design, manufacturing, factory fabrication, supply, unloading, installation, testing, commissioning, handover, training, and comprehensive AMC support for two (2) years post-handover.

Project Location	Bidkin, Aurangabad
Tender / RFQ No.	JSWGT/02/11/GATE/01
Issue Date	11/02/2026
Pre-bid Meeting	12/02/2026
Last Date for Queries	13/02/2026
Bid Due Date	15/02/2026
Submission Mode	Email

2. Instructions to Bidders (ITB)

Eligibility:

- OEM gate manufacturers or authorized system integrators.
- Minimum 3 similar industrial gate projects in the last 5 years (attach POs/Completion Certificates).

Bidding Method:

- Two-Part Bidding: Part-I Technical Bid; Part-II Price Bid.
- Price bid of only technically qualified bidders will be opened.
- Bid Validity: 90 days from Bid Due Date.

Pre-bid & Clarifications:

- Attend pre-bid as scheduled. Submit all queries by the Last Date for Queries.
- JSW may issue responses/addenda; bidder to acknowledge.
- JSW may seek clarifications; bidder to respond within 48 hours.

Site Visit:

Recommended. Coordinate with JSW site team for access and safety compliance.

Confidential – © JSW Greentech Limited

Submission:

- Email submission only as per Section 10.
- Subject line for Technical Bid: TECHNICAL BID – JSWGT/02/11/GATE/01 – [Bidder Name]
- Subject line for Price Bid: PRICE BID – JSWGT/02/11/GATE/01 – [Bidder Name]
- Do not club technical and price bid in one email.

3. Scope of Work

Design & Engineering:

- Complete design of all automatic and manual gates, drive mechanisms, control panels, safety sensors, interlocks, and cabling architecture up to single-point power at security cabin.
- Design calculations, GA drawings, fabrication drawings; compliance to relevant IS standards.
- Civil interface details with reactions, base plate/anchor sizes, sleeves, and templates.
- Motor/drive sizing calculations, safety device layout, control philosophy.

Fabrication & QA:

- Factory fabrication with mill/QA certificates; weld procedures; dimensional checks.
- Galvanization/painting specifications as per IS; PDI intimation to JSW.

Supply & Logistics:

- Packing, transport, insurance, unloading at site; storage & protection until installation.

Installation & Commissioning:

- Erection, alignment, testing, commissioning; integration with access control (if any) and safety systems; demonstration and handover.

Training & Documentation:

- Train security and operations personnel; provide O&M manuals and checklists.
- As-built drawings (PDF & AutoCAD), wiring diagrams, datasheets, spares list, recommended maintenance schedules.

AMC (2 Years):

- Comprehensive AMC including preventive and breakdown maintenance, response times, and spares/consumables (detailed in Annexure E).

Confidential – © JSW Greentech Limited

Current Requirement:

1) Main Gate

Item	Qty	Size
Boom barrier	1	6 m opening
Telescopic/Cantilever gate	1	12 m × 1.8 m
Collapsible/Retractable gate	1	6 m opening
SS Flap Barrier gate	1	550 mm opening

2) Material Entry Gate

Item	Qty	Size
Telescopic/Cantilever gate	1	12 m × 1.8 m
Boom barrier	1	6 m opening
Sliding gate	1	4 m × 1.8 m

3) Material Exit Gate

Item	Qty	Size
Telescopic/Cantilever gate (if possible)	2	7 m × 1.8 m
Manual swing gate	2	1.2 m × 1.8 m

4) People Entry & Exit Gate

Item	Qty	Size
Telescopic/Cantilever gate	2	3 m × 1.8 m
Manual swing gate	2	1.2 m × 1.8 m
Motorized swing gate	2	1.8 m × 1.8 m

4. Deliverables & Staging

Design Stage:

- Design basis and compliance matrix to applicable IS standards.
- GA & detailed fabrication drawings for each gate type/location (PDF & AutoCAD).
- Motor/drive sizing; safety device layout; control philosophy.
- Civil interface drawings with reactions, base plate/anchor details.
- Manufacturing Quality Plan (MQP) and Inspection & Test Plan (ITP).
- Client review/approval cycles (max 10 working days per cycle).

Supply Stage:

- Fabrication as per approved drawings; surface treatment/painting/galvanizing as specified.
- PDI notification & clearance; packing list; dispatch clearance.

Confidential – © JSW Greentech Limited

- Delivery to site; unloading & storage with protection.

Installation & Handover Stage:

- Erection, alignment, wiring up to single-point power at security cabin (power supply by JSW).
- Testing & commissioning with safety interlocks and limit switches.
- Handover with O&M manuals, training certificate, and as-built drawings.

5. Technical Requirements & Standards

All gates and systems shall conform to relevant Indian Standards (IS) and good engineering practices (indicative list – bidder to confirm and comply):

IS 2062 for structural steel; IS 800 for general construction; IS 816/9595 for welding; IS 4759 for hot-dip galvanizing; IS 5 / IS 1477 for paint systems.

IS 325 / IS 12615 for motors; IS/IEC 60947 series for switchgear; IS 8623 for control panels; IS 694/1554 for cables.

IS 4912/IS 875 (relevant parts) for loads; IS 14665 (as applicable for automation components); IS 9103 for concrete admixtures (interfaces).

Electrical safety & earthing as per IS 3043; wiring colour codes per IS 5578/11353; IP ratings as per IS/IEC 60529.

Data submission: All drawings in PDF & AutoCAD; wiring schematics; motor datasheets; gate weight & load details; civil support requirements.

6. Gate Types & Locations

Bidder shall propose and price per location/type; optional cantilevers to be quoted separately.

Minimum categories: Sliding (auto), Swing (auto & manual), Boom barriers, Telescopic, Cantilever (optional), Pedestrian flap/turnstiles.

Vendor to share AutoCAD drawing with proposed gate designs integrated in plant layout.

7. BOQ / Price Bid Format (to be filled by Bidder)

S.No.	Gate Type	Location/Tag	Dimensions (W × H)	Motor/Drive Spec	Unit	Qty	Unit Rate (INR)
1							
2							
3							
4							
5							

Confidential – © JSW Greentech Limited

Notes: Prices to include design, fabrication, supply, unloading, installation, testing, commissioning, training, and handover with all accessories and safety devices. Taxes to be indicated separately (GST).

8. Special Commercial Conditions (SCC)

- Price Basis: Firm, inclusive of all duties/levies/packing/forwarding/insurance/freight to site; GST extra as applicable to be shown separately.
- Payment Terms: 90% against successful installation, testing & commissioning and submission of duly certified measurement/acceptance; 10% against submission of Performance Bank Guarantee (PBG) valid for 24 months from handover.
- PBG: 10% of Contract Value, valid for 24 months from handover date; issued by JSW-approved nationalized/scheduled bank.
- Liquidated Damages (LD): 1% of total contract value per week of delay or part thereof, capped at 5% of contract value.
- Professional Indemnity Insurance: Mandatory; coverage adequate to cover design/manufacturing defects and third-party liabilities.
- Warranty/Defect Liability: Minimum 24 months from handover; rectify/replace defective items at no cost to JSW within agreed response times.
- Price Bid Confidentiality: Opened only for technically qualified bidders; JSW decision on evaluation is final.

9. General Conditions of Contract (GCC)

- Contract Documents: LOA/PO, this Tender, bidder's accepted offer, addenda/clarifications.
- Jurisdiction & Dispute Resolution: Courts at Mumbai, Maharashtra; further dispute resolution as per JSW Legal standard provisions.
- Indemnity: Vendor to indemnify JSW against claims arising from design, manufacturing, installation, IP infringement, and statutory non-compliance.
- Force Majeure: As per standard terms; notify within 7 days of occurrence.
- Termination: For default, convenience, or prolonged force majeure, with notice as per JSW policy.
- HSE: Comply with JSW HSE requirements, IS safety standards; provide method statements, JSA, PPE, and supervision.
- Statutory Compliance: Adhere to applicable labor laws, ESI, PF, Contract Labour Act, and local regulations.
- Confidentiality & IP: All drawings/data generated for JSW remain JSW property; confidentiality to be maintained.

10. Bid Submission Structure & Checklists

Bidders shall submit two separate emails for Technical and Price bids:

Email 1 – Subject: TECHNICAL BID – JSWGT/02/11/GATE/01 – [Bidder Name]

Email 2 – Subject: PRICE BID – JSWGT/02/11/GATE/01 – [Bidder Name]

Confidential – © JSW Greentech Limited

Technical Bid – Mandatory Documents

- Gate-wise technical details: type, dimensions, gate weight, motor/drive make & model, torque/speed ratings, duty cycle.
- GA & fabrication drawings (PDF & AutoCAD) for every location; wiring schematics; control philosophy; safety devices list.
- Civil interface details with loads, anchor/plate sizes, sleeves, foundation requirements.
- Compliance matrix to IS standards listed in Section 5; deviations list if any.
- Past experience: minimum 3 similar projects with client references/PCs.
- AMC plan for 2 years with preventive maintenance schedule and SLAs (Annexure E).

Confidential – © JSW Greentech Limited

Annexures

Annexure A: Site/Location List & Gate Schedule

S.No.	Location/Tag	Gate Type	Dimensions (W × H)	Qty	Remarks
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

Annexure B: Drawing Register & Submission Matrix

S.No.	Document Title	Doc No.	Rev	Planned Submission	JSW Approval
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					

Annexure C: Technical Compliance Matrix

Clause Ref	Requirement	Complied (Y/N)	Remarks/Deviation
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			

Confidential – © JSW Greentech Limited

Annexure D: Price Bid – Detailed Breakup

S.No.	Item Description	UoM	Qty	Unit Rate (INR)	Amount (INR)
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

Taxes: GST to be indicated separately. TDS as applicable will be deducted by JSW.

Annexure E: AMC Scope & SLAs (2 Years)

☐ Preventive Maintenance: Quarterly PM; submit checklist within 48 hours of visit.

☐ Breakdown Response: Within 24 hours for critical gates; resolution within 72 hours.

☐ Spares/Consumables: Included; maintain minimum critical spares at site or supply within 72 hours.

☐ Uptime KPI: Target ≥ 98% per gate per quarter; penalties adjustable against PBG for shortfall (if specified in PO).

Gate Tag	PM Task	Method	OK/Not OK	Remarks	Technician	Date

Confidential – © JSW Greentech Limited

Annexure F: Forms & Declarations

Form-1: Bid Submission Letter

To,
The Project Head, JSW Greentech Limited
Subject: Submission of Bid – JSWGT/02/11/GATE/01

Dear Sir/Madam,
We hereby submit our Bid comprising Part-I (Technical) and Part-II (Price) for the above RFQ, in full conformity with the terms and conditions. We confirm the validity of our bid for 90 days.

Authorized Signatory: _____
Name & Designation: _____
Company Seal
Date: _____

Form-2: Authorization / Power of Attorney

We hereby authorize Mr./Ms. _____ (Designation _____) to sign, submit, and conduct all bid-related correspondence on behalf of our company for this RFQ.

Authorized Signatory & Seal

Form-3: No Deviation Certificate

We hereby certify that our bid is fully compliant with the technical and commercial requirements of the RFQ without deviations, unless explicitly listed in our Deviations Sheet (if any).

Authorized Signatory & Seal

Form-4: Integrity & Anti-Collusion Declaration

We confirm that our bid has been prepared independently without any collusive arrangement with other bidders and adheres to ethical business practices.

Authorized Signatory & Seal

Form-5: Bank Details & GST Certificate Copy


Field	Details
Beneficiary Name	
Bank Name	
Branch	
Account No.	

Confidential – © JSW Greentech Limited


IFSC	
PAN	
GSTIN	
Registered Address	

Detailed Deliverables per Gate


A) Main Gate

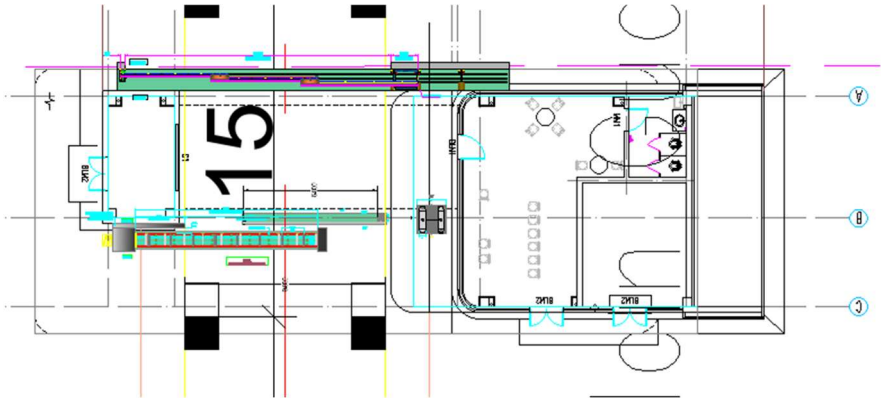


- i) Boom Barrier

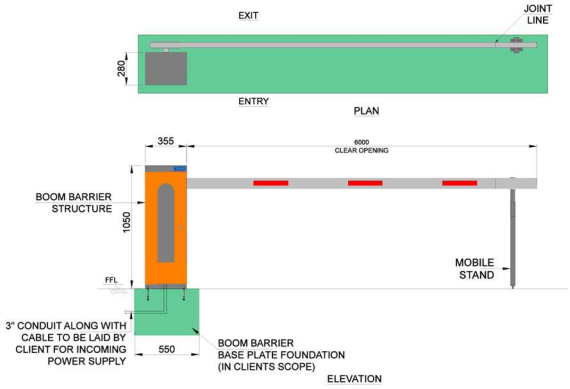


- ii) Telescopic/Cantilever Gate

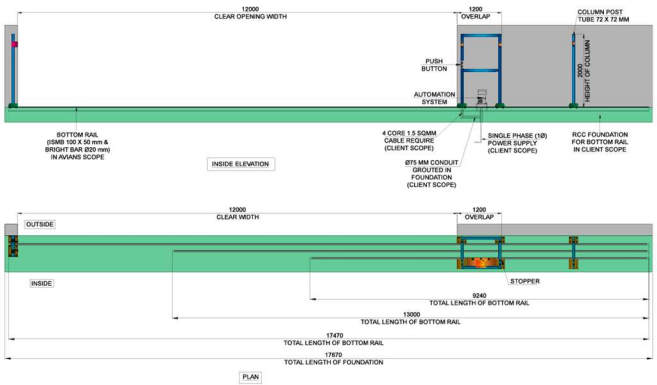


- iii) Retractable/Collapsible Gate

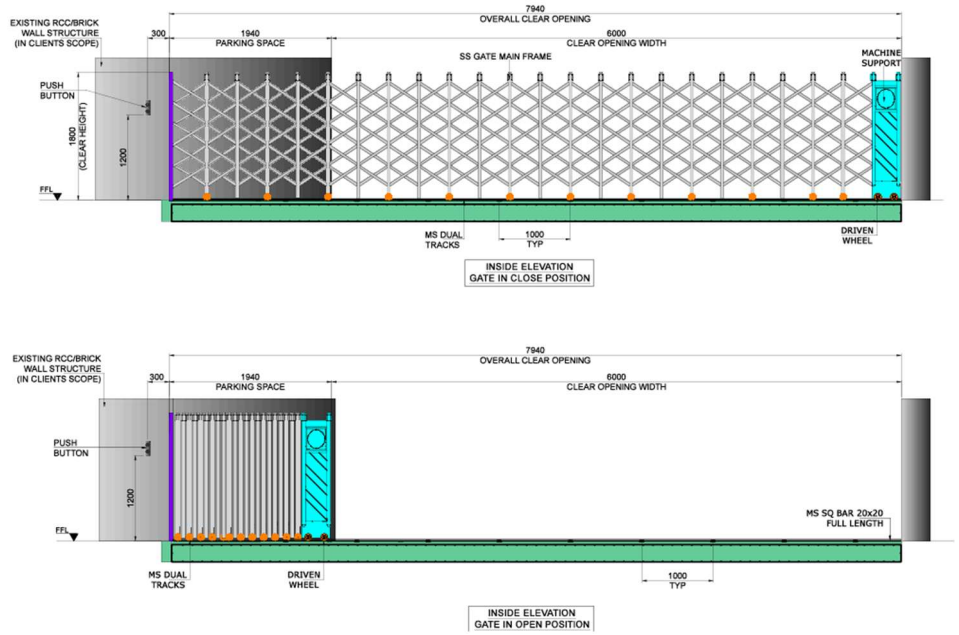


- iv) SS Flap Barrier

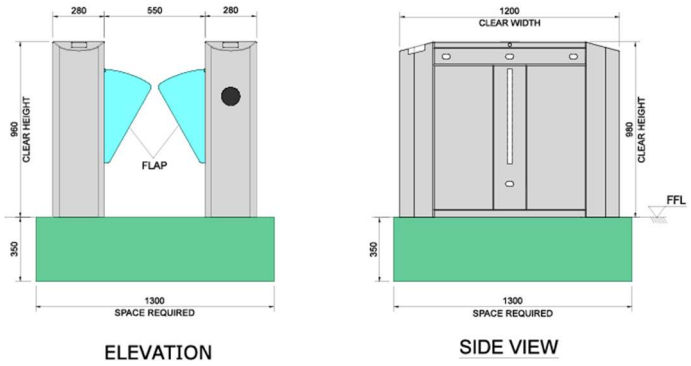


B) Material Entry Gate

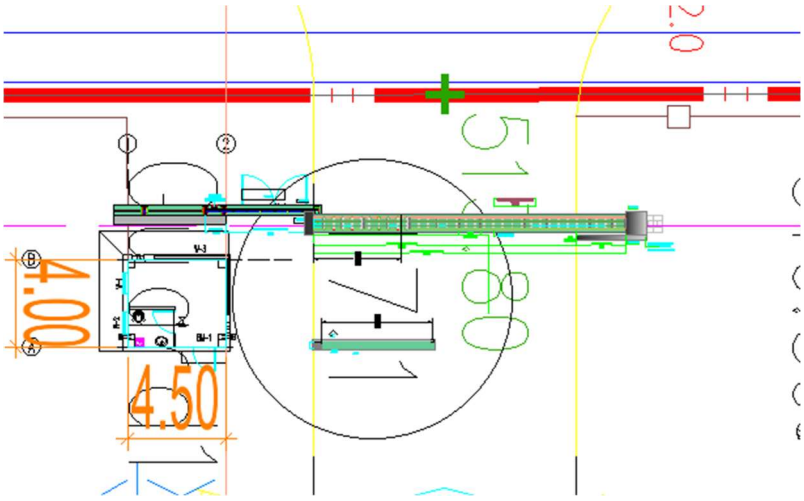


- i) Telescopic/Cantilever Gate

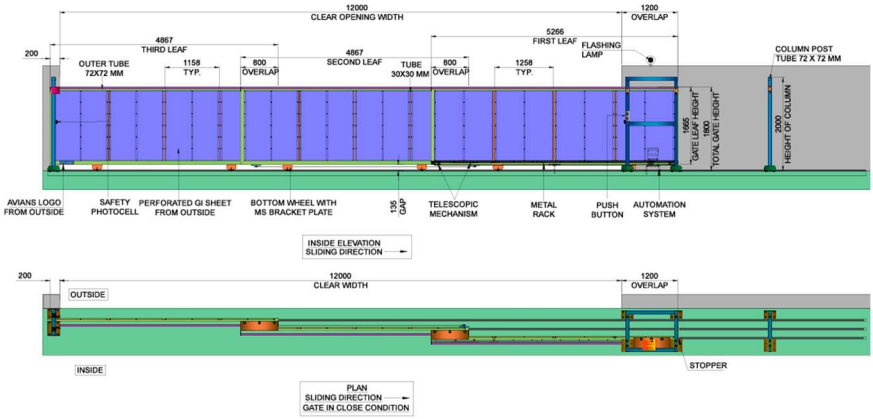


- ii) Boom Barrier

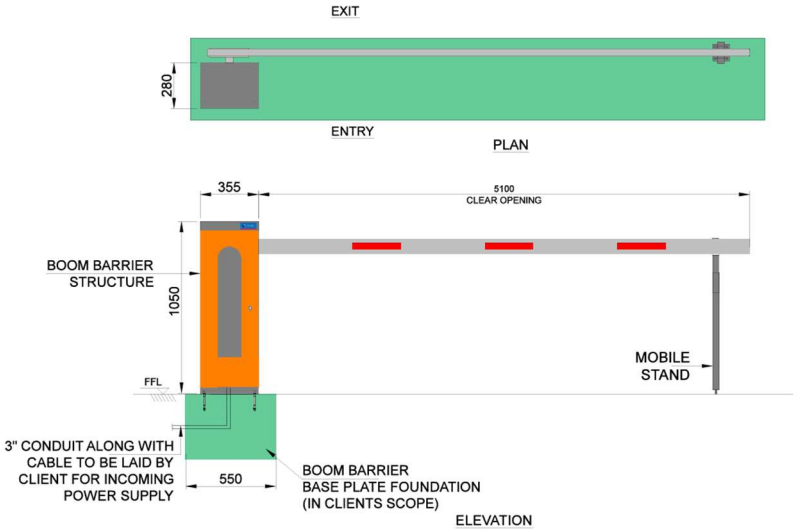


- iii) Sliding Gate

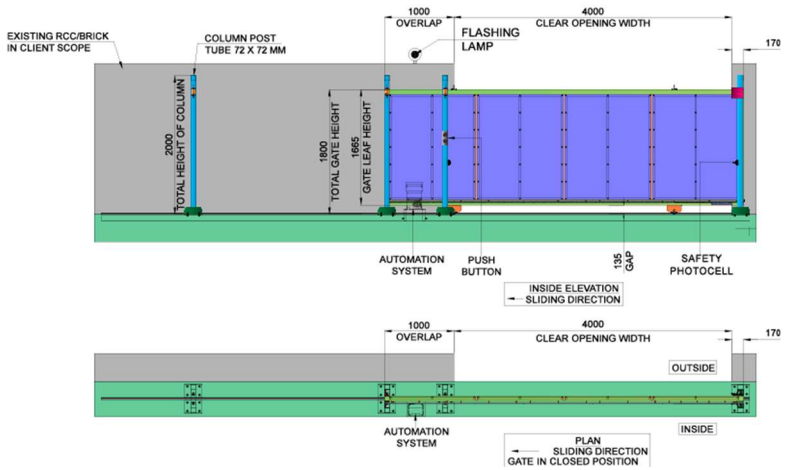


C) Material Exit Gate

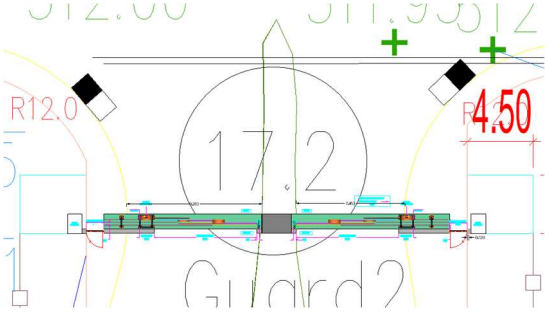

- i) Telescopic Gate (2 nos.) & Manual gate (2 nos.)

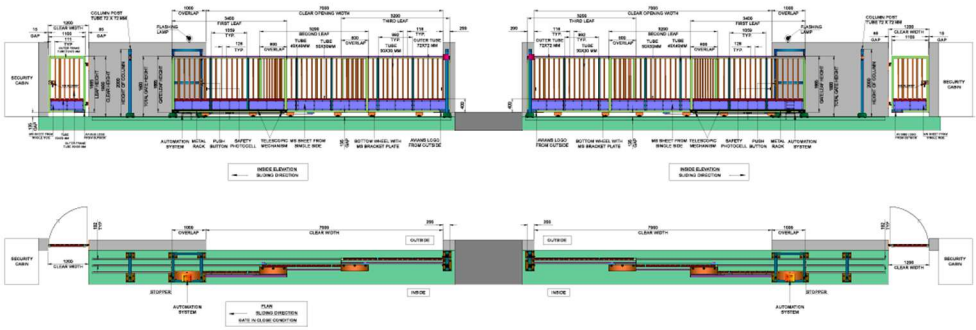

D) People/Manpower Entry Exit Gate

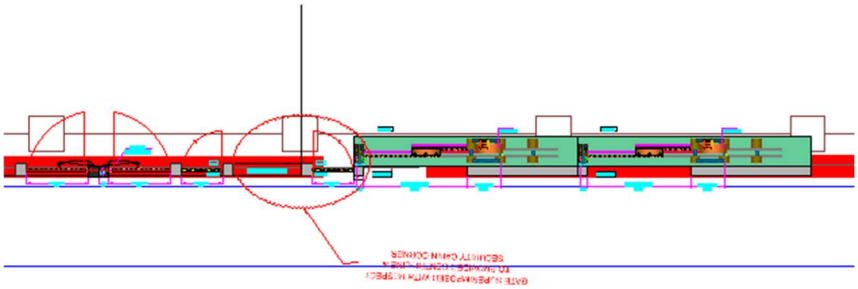

- i) Telescopic Gate (2 nos.)
- ii) Motorised swing gate (2 nos.)
- iii) Manual gate (2 nos.)

