NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Citadel
Mumbai

Date : 20.05.2025
Quote NO : RR_25.26.0031
Kind Attn : Ms. Sonal Mehta
Email Id : salesmum3@citadelarch.com
Contact No: 9082795010

Project Name & Location: Tower L & Tower P - Lodha

Subject : Commercial Offer for Automatic Retractable Roof

Dear Sir / Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	1
C.	General Conditions	2
D.	Terms & Condtions	2

A) Commercial Offer


Area	Description	Size (mtr)	Qty (Nos)	Supply Charges in INR	
				Unit Rate	Total
Tower L	**Automatic L Shape Retractable Roof with Polycarbonate sheet**	• 1664 W X 2780 LX H 1500 • 2 Panels • One side Opening • One side wall mounted Track •NIHVA make special VMC block bearing house	1	₹ 5,69,000	**₹ 5,69,000**
	Automatic L Shape Retractable Roof with Polycarbonate sheet	• 2095 W X 2900 LX H 1500 • 2 Panels • One side Opening • One side wall mounted Track • NIHVA make special VMC block bearing house	1	₹ 6,16,000	**₹ 6,16,000**
Tower P	**Automatic Retractable Roof with Polycarbonate sheet**	• 1950 W X 6225 L X 600 • 2 Panels • One side Opening	2	₹ 5,53,000	**₹ 11,06,000**
3		**Total without Taxes**			**At actuals**
4		GST Extra @ 18%	18%		**Extra At Actual**
5		P&F Charges @ 3%	3%		**Extra At Actual**
6		Transportation Charges			**In Client Scope**
		Unloading Charges @ Site			**In Client Scope**

B) Technical Specification:-

1. Polycarbonate Clear/Embossed compact
2. Profile : Powder coated AL Frame
3. Guide : Aluminium
4. Interlocking
5. Motor Mechanism with control panel **a) Remote operated** **b) Single Phase Bi-directional Motor** **c) Power- As per Roof Dimension** **d) Mechanical Limit Switch** **e) Rack and Pinion Arrangement**
6. EPDM Gaskets and sealants
7. SS Fastners
8. NIHVA make special VMC block bearing house
9. Track:- Hard chrome bar





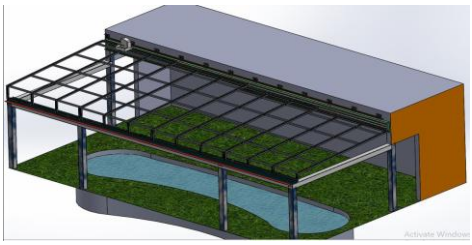

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

D) **Terms & Conditions**

Price :	Ex Works Pune.
Delivery :	4 - 6 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.
Payment :	80% Advance along with Confirmed Purchase Order. 10% After material Delivery at site. 10% After Installation.
Validity :	Validity of offer is 15 days from the date of quotation.
Warranty :	12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.

With Best Regards

Indhumathi Iyer

8551091333
NIHVA Technologies Pvt Ltd