NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Technical Associates Ltd
B7, Eldeco Sidcul Industrial Park,
Sitarganj, U.S. Nagar. Uttarakhand 262405

Date : 15.04.2022
Quote NO : RR_21.22.0201R
Kind Attn : Mr. DVS Raju
Email Id : dvsraju@techasso.com
Contact No: 9966991253


Project Name & Location: Technical Associates Ltd Uttarakhand

Subject : Commercial Offer for Automatic Retractable Roof

Dear Sir / Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	NIHVA Intro	1
B.	Commercial Offer	1
C.	Technical Specification	1
D.	General Conditions	2
E.	Terms & Condtions	2

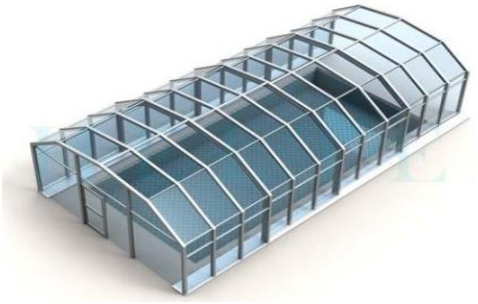

A) Why to Choose NIHVA?

1 Prominent Brand for Automation products
2 Pioneers in offering Intelligent, Innovative and Economical Solutions.
3 Specilized in Integrated solutions of Automations.
4 Continuous Improvement in - Change, Communication, Gratitude, Performance & Leadership
5 Integrity, Quality & Commitment
6 Innovation & Novelty in Design
7 Experinced & Skilled Manpower
8 Customer Centric Organization to deliver Best Quality Products & On Time Services.

B) Commercial Offer

Sr No	Description	Qty	Supply & Installation Charges in INR	
		(Nos)	Supply Charges	Installation Charges
1	**NIHVA Make Automatic Retractable Machine Cover** • Size: 6500 X 12700 X 3600 X 4 Panel • One side movement	1	15,90,000	40,000
2	**GST Extra @ 18%**	18%		**Extra At Actual**
3	**P&F Charges @ 3%**	3%		**Extra At Actual**
4	**Transportation Charges**			**Extra At Actual**
5	**Unloading Charges @ Site**			**In Client Scope**

C) Technical Specification

Automatic Retractable Machine Cover

1. Polycarbonate Clear 4mm compact, UV Protected Both Sides
2. Profile : Powder Coated AL Frame Coated
3. Guide : Annodized AL Extruded Guide
4. Interlocking with nylon stoppers
5. Dual Motor Mechanism **a) 2 Remote Controlled** **b) Single Phase Bi-directional Motor** **c) Speed- 09-12m/min** **d) Power- As per Roof Dimension** **e) Mechanical Limit Switch** **f) Rack and Pinion Arrangement -Z16/Molude4/Module6** **g) 100% Imported European Make**
5. Control Panel System with Push Button Operation
6. High Heat Resitant EPDM Gaskets and Sealants
7. SS 304 Fastners

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

D) General Conditions

1. Continuous uninterrupted access to installation section or as agreed seperately.
2. Provision of 230 V power supply for hand tools.
3. A dry and secure area, not in direct sunlight is to be provided for storage of product component
4. Access to site between 7 am to 12 pm should be provided.
5. Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7. Installation will start after receiving of Site Readiness Photographs or written Email communication.
8. We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9. For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.
10. If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11. After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: Please find below List which are defecting scope of work.

Sr. No		Remark
1	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.	In Client Scope
2	Any structural work required.	In Client Scope
3	All structure support required.	In Client Scope
4	Conduits, Cables required.	In Client Scope
5	Secured and fully covered Store area to keep the material.	In Client Scope
6	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
7	Any civil work.	In Client Scope
8	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage.	In Client Scope

E) Terms & Conditions

Price :	Ex Works Pune.
Delivery :	12-14 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.
Payment :	60% Advance along with Confirmed Purchase Order. 35% Along with Approval of Drawing and before start a Production. 5% Against completion of Installation, Testing and Commissioning.
Validity :	Validity of Offer is 15 days from the date of quotation.
Warranty :	12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.
Design Clause :	NIHVA shall be deemed the authors of their respective concept and drawings with reserved rights, including copyrights. It shall not be used by the owner for future additions or alterations to this Project or for another project or should not copied at any other future project or should not transfer or copied by anyone.
Compensation Clause :	Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA a compensation of 25% of order value.

With Best Regards
Pratibha Mete
8530872333
For NIHVA Technologies Pvt Ltd