
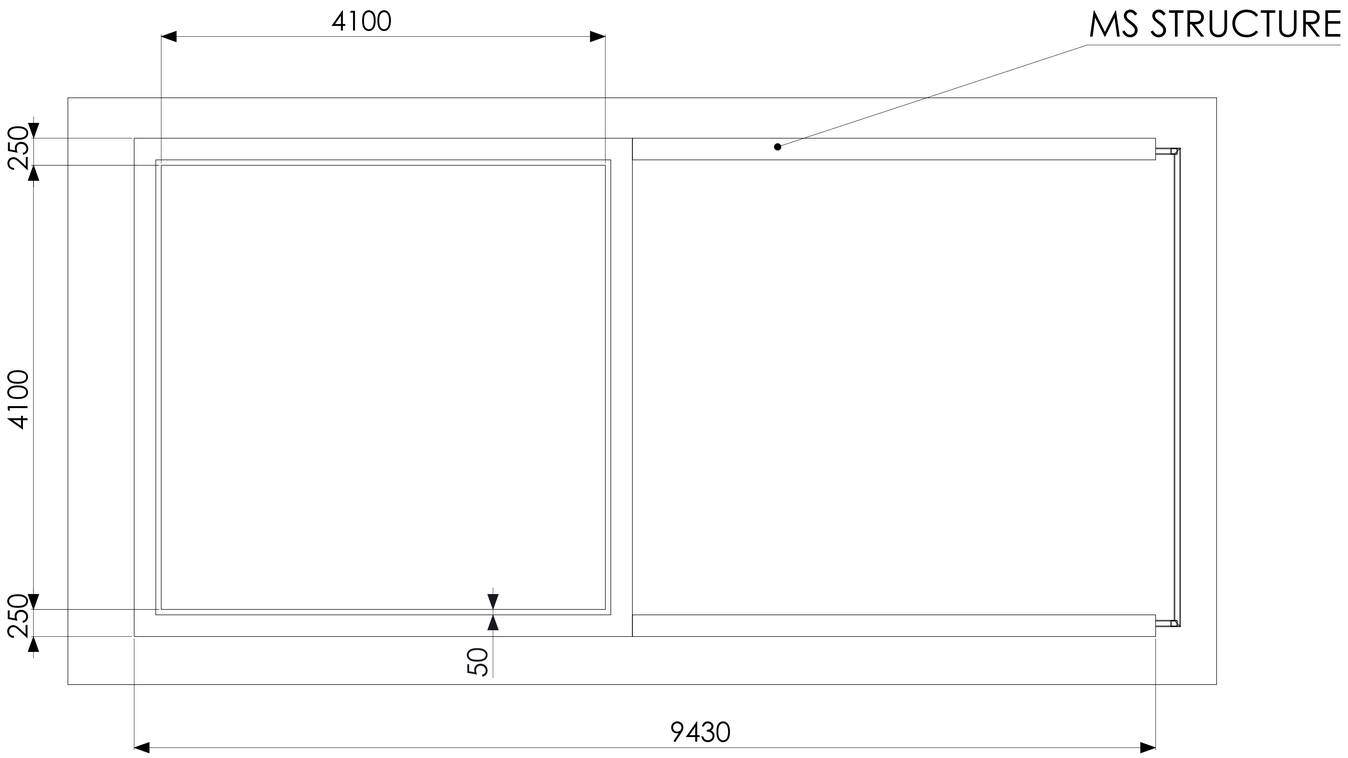


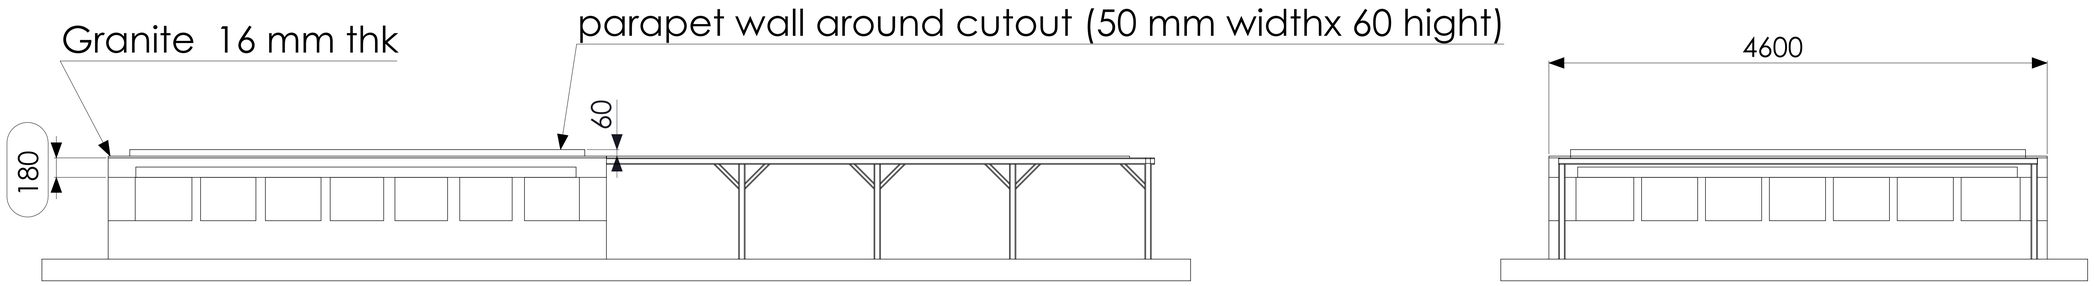

note:
1) current top civil structure is approx 92 mm in depth
need to increase the depth of top civil structure to atleast **180 mm**
2)top surface shoud be of **smooth granite of 16 mm** thk for track
3)parapet wall shoud be constructed of **50 thk and 60 mm hight**
avoid water flowing inside cutout

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - Plan layout				NIHVA TECHNOLOGIES PVT. LTD.
QTY -				
NAME	SIGN	DATE		
DRAWN	H. B.	03/08/23		CLIENT - NTPL-183-HP
CHECK	P. M.	03/08/23		LOCATION -Ahmedabad
APPRD.	V. T.	03/08/23		PRODUCT - Retractable roof
If any queries contact : supportautomation@nihva.com				DWG NO - NIHVA\22-23\NTPL183 REV-1
ALL DIMENSION ARE IN mm				SCALE: SHEET: