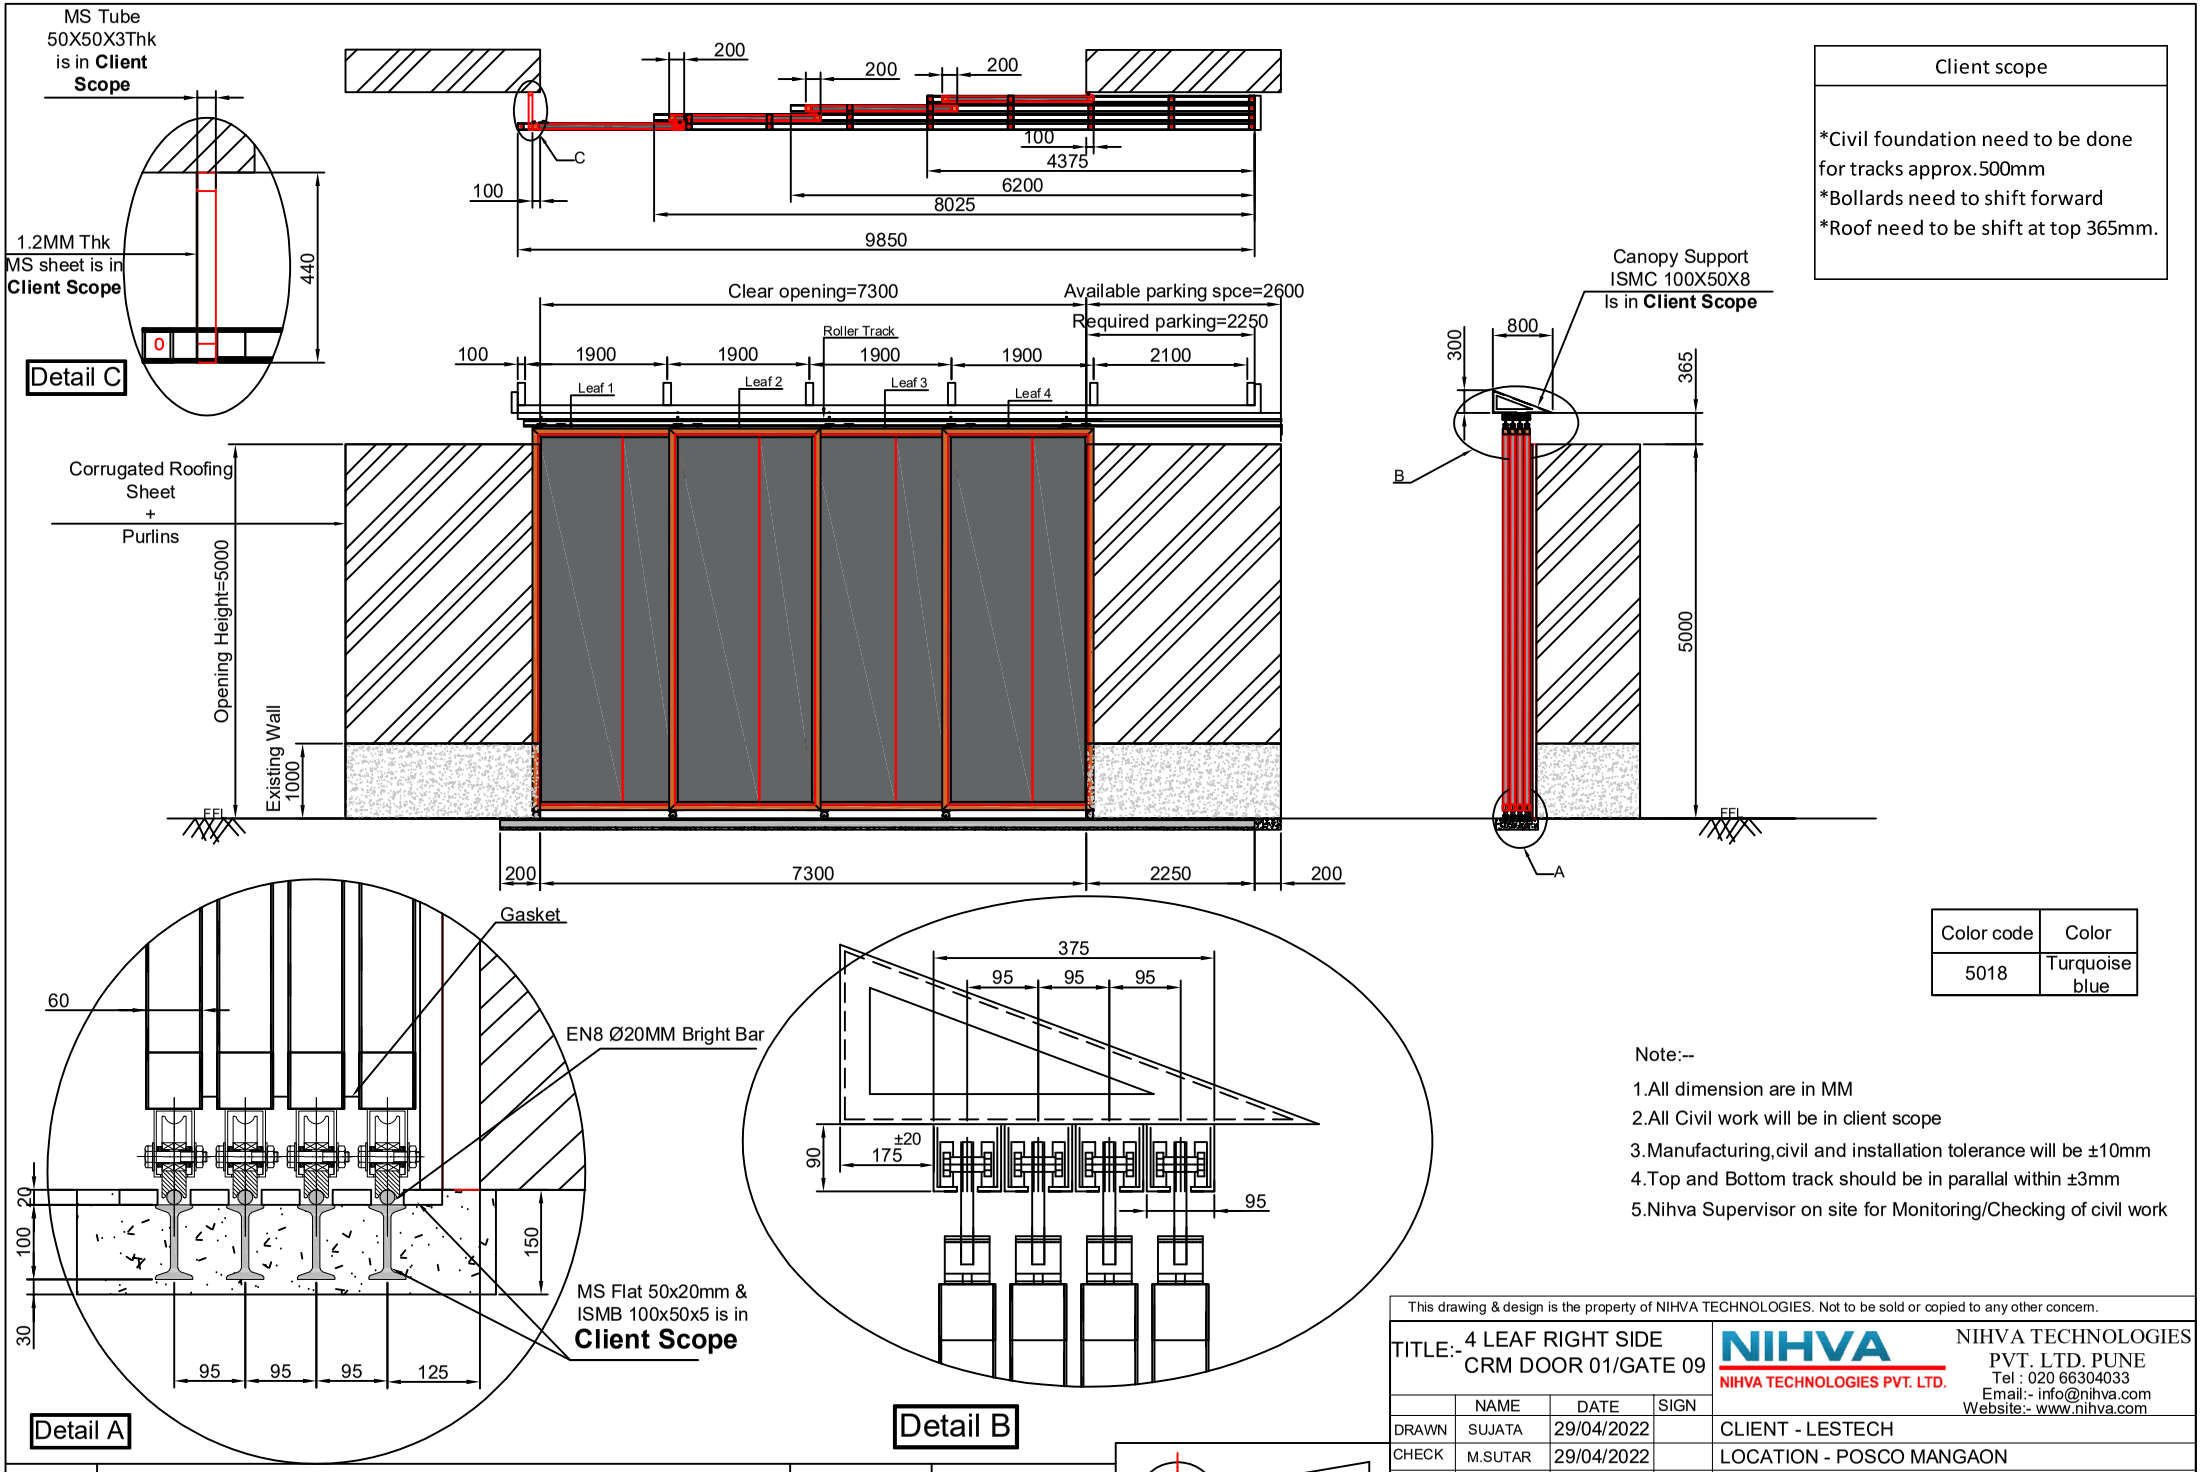


Client scope
*Civil foundation need to be done for tracks approx.500mm *Bollards need to shift forward *Roof need to be shift at top 365mm.

Color code	Color
5018	Turquoise blue

Note:--

1.All dimension are in MM
2.All Civil work will be in client scope
3.Manufacturing,civil and installation tolerance will be ±10mm
4.Top and Bottom track should be in parallal within ±3mm
5.Nihva Supervisor on site for Monitoring/Checking of civil work

Rev No.	Revision	Date	Revised By
00	Released drawing	29/04/2022	Sujata
1.	Revised as per Client Comments	29/04/2022	Sujata

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:- 4 LEAF RIGHT SIDE CRM DOOR 01/GATE 09

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	SIGN
DRAWN	SUJATA	29/04/2022	
CHECK	M.SUTAR	29/04/2022	
APPRD.	V.TARAK	29/04/2022	

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT - LESTECH
LOCATION - POSCO MANGAON
PRODUCT - SLIDING DOOR
DWG NO:-NIHVA/22-23/CLT/0014 REV- 1
SCALE: NTS SCALE:-- 1:1 SHEET: 01 OF 01