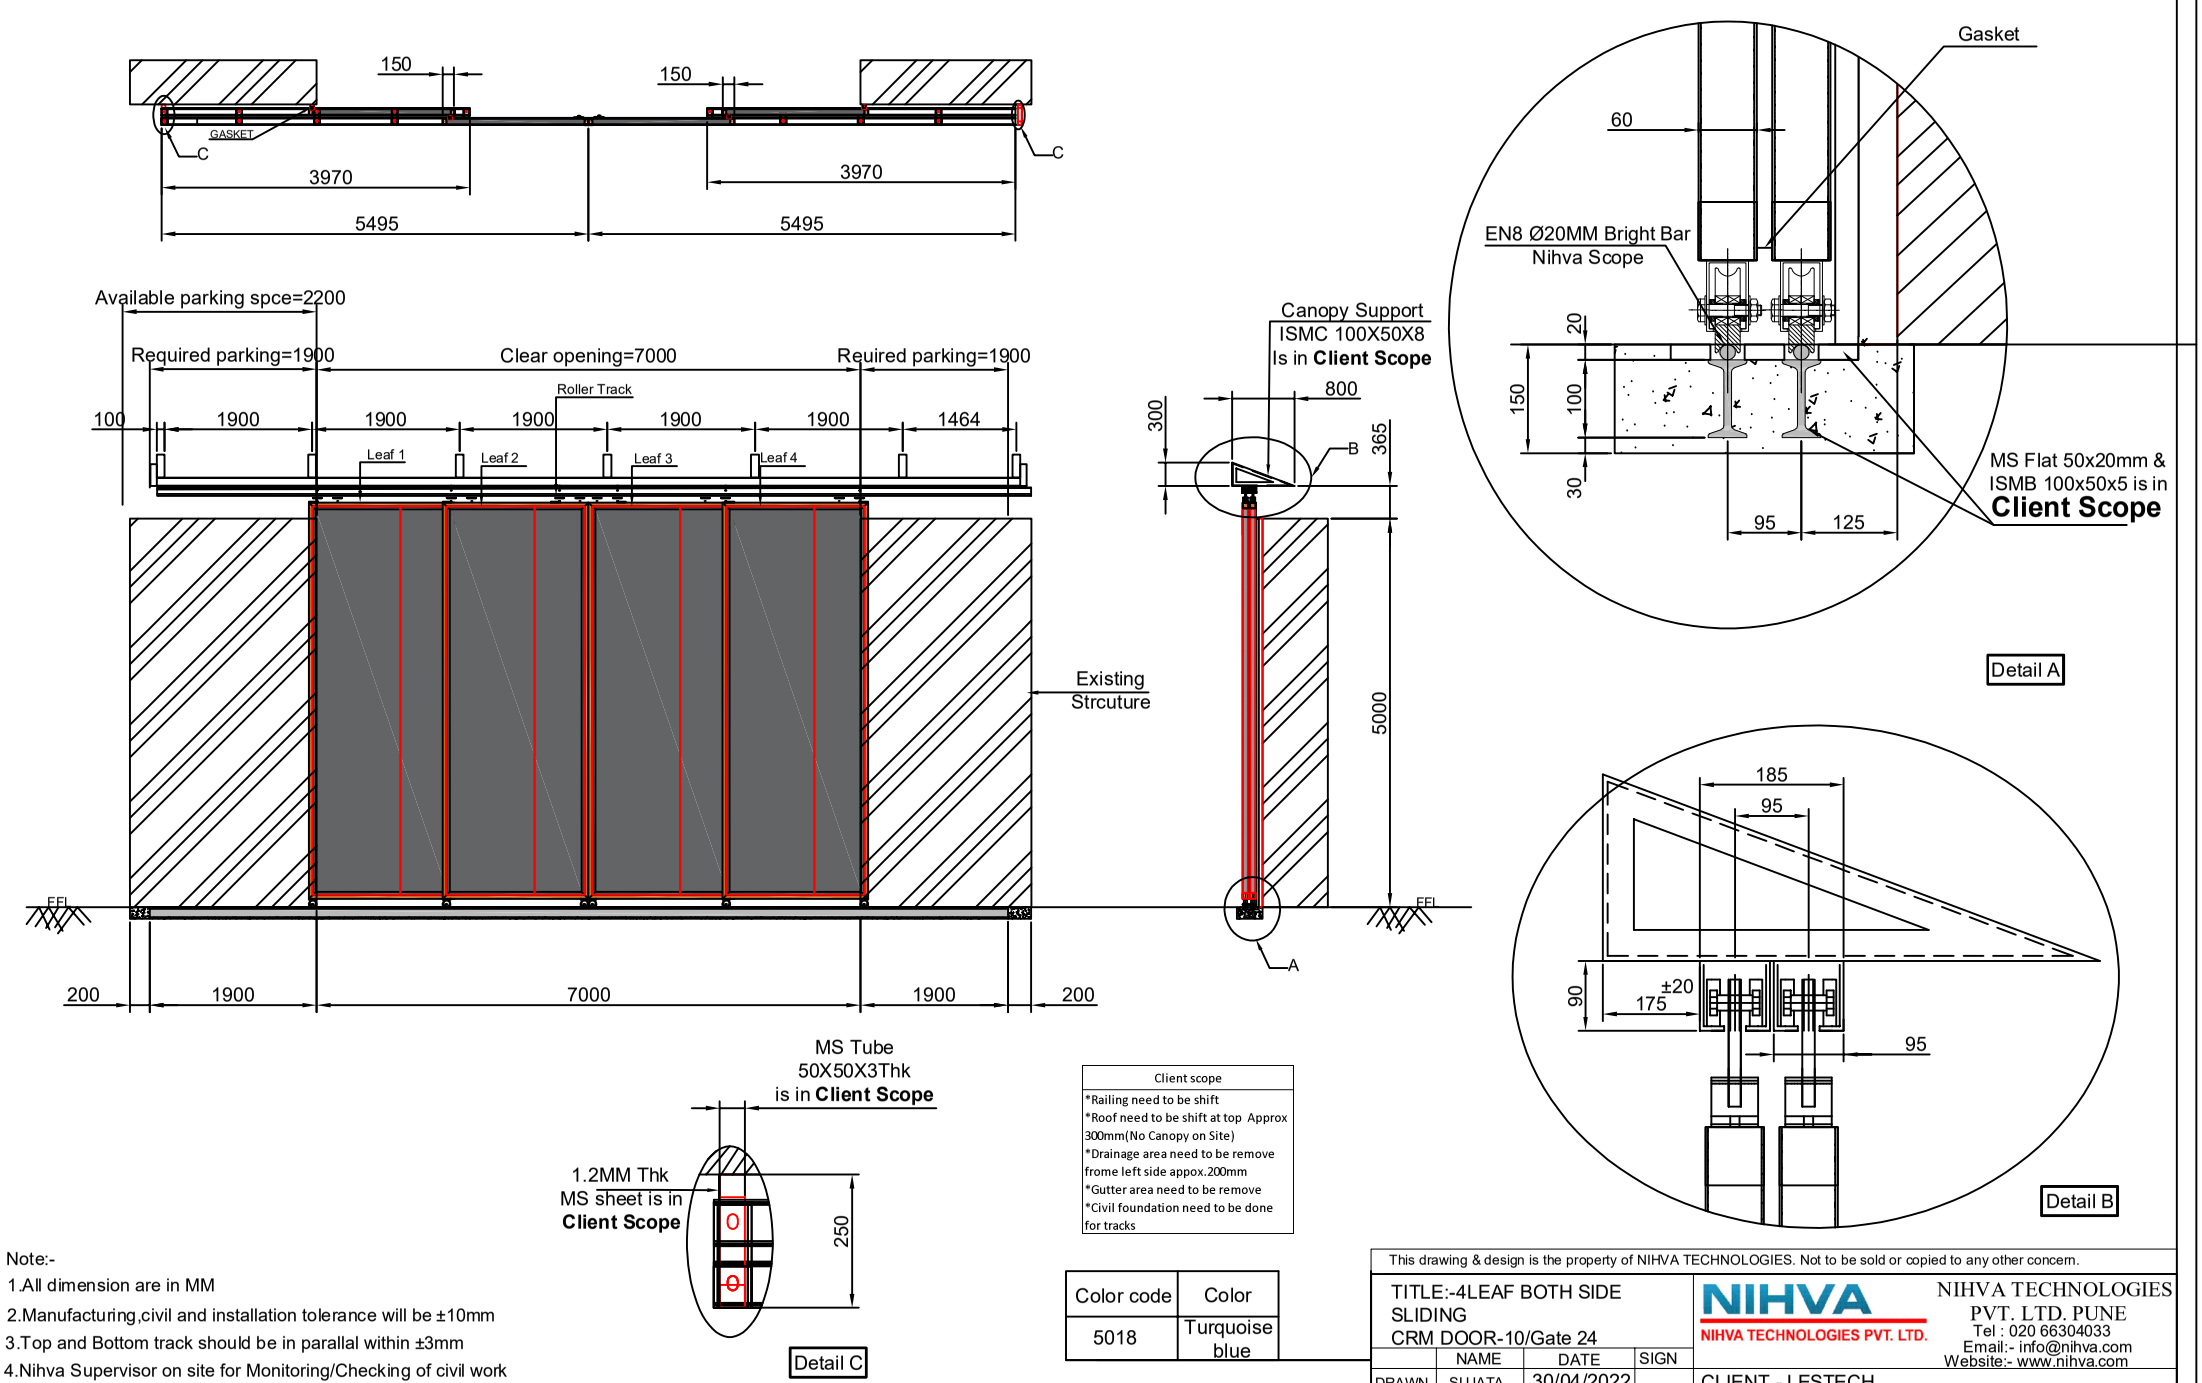



| Client scope |
|---|
| *Railing need to be shift |
| *Roof need to be shift at top Approx 300mm(No Canopy on Site) |
| *Drainage area need to be remove frome left side appox.200mm |
| *Gutter area need to be remove |
| *Civil foundation need to be done for tracks |

| Color code | Color |
|---|---|
| 5018 | Turquoise blue |

Note:-
1.All dimension are in MM
2.Manufacturing,civil and installation tolerance will be ±10mm
3.Top and Bottom track should be in parallal within ±3mm
4.Nihva Supervisor on site for Monitoring/Checking of civil work

| Rev No. | Revision | Date | Revised By |
|---|---|---|---|
| 00 | Released drawing | 29/04/2022 | Sujata |
| 1. | Revised as per Client Comments | 02/05/2022 | Sujata |

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:-4LEAF BOTH SIDE SLIDING
CRM DOOR-10/Gate 24

| | NAME | DATE | SIGN |
|---|---|---|---|
| DRAWN | SUJATA | 30/04/2022 | |
| CHECK | M.SUTAR | 30/04/2022 | |
| APPRD. | V.TARAK | 30/04/2022 | |

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - LESTECH
LOCATION - POSCO MANGAON
PRODUCT - SLIDING DOOR
If any queries contact : design@nihva.com
DWG NO:-NIHVA/22-23/CLT/0017 REV- 1
ALL DIMENSION ARE IN mm
SCALE: NTS SCALE:-- 1:1 SHEET: 01 OF 01