S P WIRES

Manufacturers Of: G.I. & P.V.C. Chain link, G.I. Barbed wire, Razor Type Concertina Coil Barbed Wires, M.S. Compound Angles & Cement, Concrete Compound Pole, J Hooks, U Nails & Quarter pin


We Install All Types Of Compound Works

Ref: SPW/19 - 20 **Quotation** Date: 29-05-2019.


To: Mr. Vijay Tarke
Email Id: sales@nihva.com
Contact No.: 8551093333
Sub. : Quotation for Compound Work

Respected Sir,

As per our discussion with you, we will quote our best rates and details of compound work.

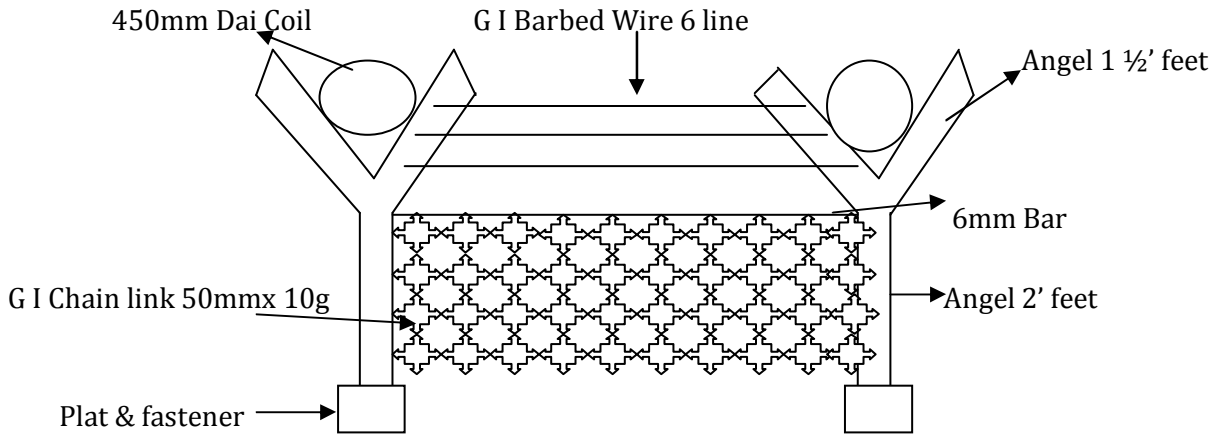

1) Providing **MS Angel 40mm/5mm Y** Shape 1 ½' x 1 ½'' x 2' with Cutting, Black Paint, & Labor Charges etc complete job. fixing for wall with Plat & fastener & providing **G I Barbed wire 12 x 14 size 6 line horizontal** fixing with **U Nails** locking & providing **G I Concertina Coil 450mm** Dai fixing with **G I wire** locking & **Bottom G I Chain link 50mm x 10g size 2' feet** fixing with **6mm Bar** Vertical & Top welding. Above mentioned work the rate are per running feet **Rs. 420.00**

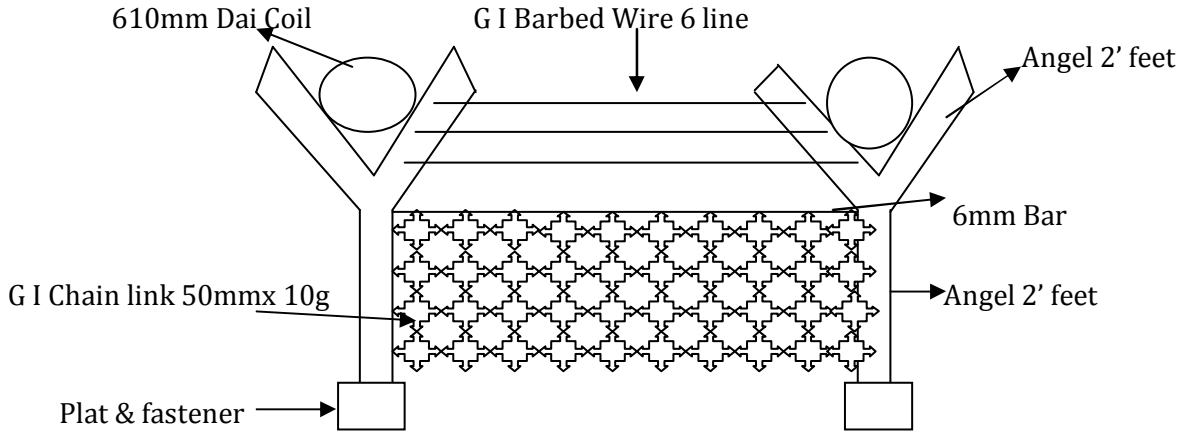


2) Providing **MS Angel 40mm/5mm Y** Shape 2' x 2' x 2' with Cutting, Black Paint, & Labor Charges etc complete job. fixing for wall with Plat & fastener & providing **G I Barbed wire 12 x 14 size 6 line horizontal** fixing with **U Nails** locking & providing **G I Concertina Coil 610mm** Dai fixing with **G I wire** locking & **Bottom G I Chain link 50mm x 10g size 2' feet** fixing with **6mm Bar** Vertical & Top welding. Above mentioned work the rate are per running feet **Rs. 440.00**

Add: S No. 116/6, C/o Sada Vasant Bahar Nursary, Walhekarwadi, Chinchwad Pune – 411033.
Contact No. **Mr. Sandeep 9422327021 & 9011036339**
Web site: www.spwires.com & www.compoundwala.com


S P WIRES

Manufacturers Of: G.I. & P.V.C. Chain link, G.I. Barbed wire, Razor Type Concertina Coil Barbed Wires, M.S. Compound Angles & Cement, Concrete Compound Pole, J Hooks, U Nails & Quarter pin

We Install All Types Of Compound Works

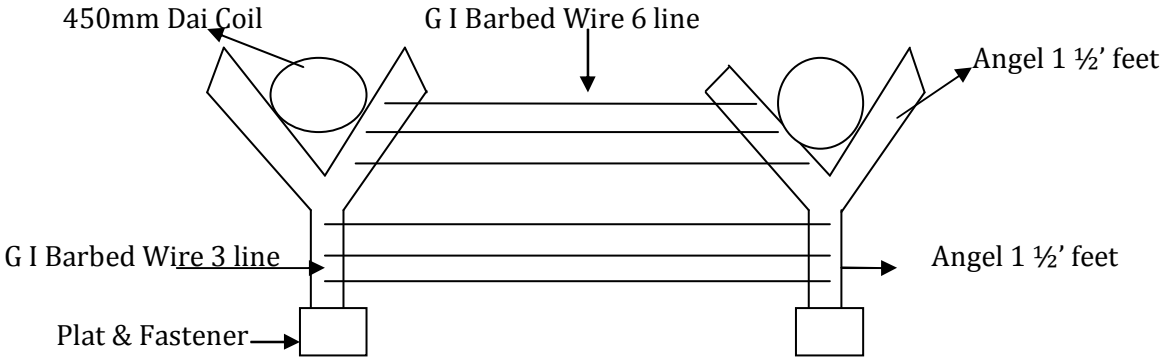

3) Providing **MS Angel 40/5 Y** Shape 1 ½' x 1 ½' x 1 ½' with Cutting, Black Paint, & Labor Charges etc complete job fixing for wall with Plat & fastener & **G I Barbed wire 12 x 14 size** providing & fixing **9 lines horizontal** with **U Nails** locking & **G I Concertina Coil 450mm** Dai providing & fixing with **G I wire** locking.
Above mentioned work the rate are per running feet **Rs. 340.00**

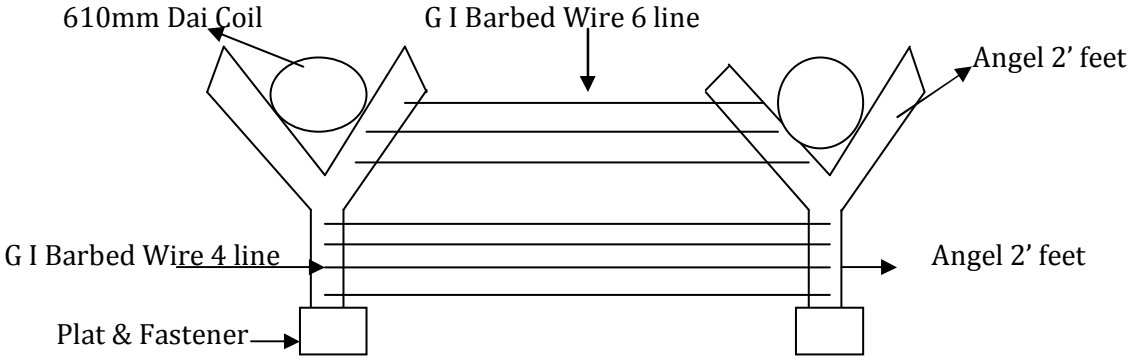

1) Providing **MS Angel 40/5 Y** Shape 2' x 2' x 2' with Cutting, Black Paint, & Labor Charges etc complete job fixing for wall with Plat & fastener & **G I Barbed wire 12 x 14 size** providing & fixing **10 lines horizontal** with **U Nails** locking & **G I Concertina Coil 610mm** Dai providing & fixing with **G I wire** locking.
Above mentioned work the rate are per running feet **Rs. 375.00**

Terms & Conditions:

1) GST 18 % Extra on above rate.
2) Transport Charges Including on above rate.
3) Payment 50% Advance & Balance payment after complitation work
4) Labor will be charges when there is no work for Labor on site due to any litigation
   (Per Labor per day's Rs. 600.00 Charges extra)
5) Plot cleanliness charges Extra on above rate.

We quoted our best & competitive rates & hopes to your positive remarks.

Add: S No. 116/6, C/o Sada Vasant Bahar Nursary, Walhekarwadi, Chinchwad Pune – 411033.
Contact No. **Mr. Sandeep 9422327021 & 9011036339**
Web site: www.spwires.com & www.compoundwala.com