
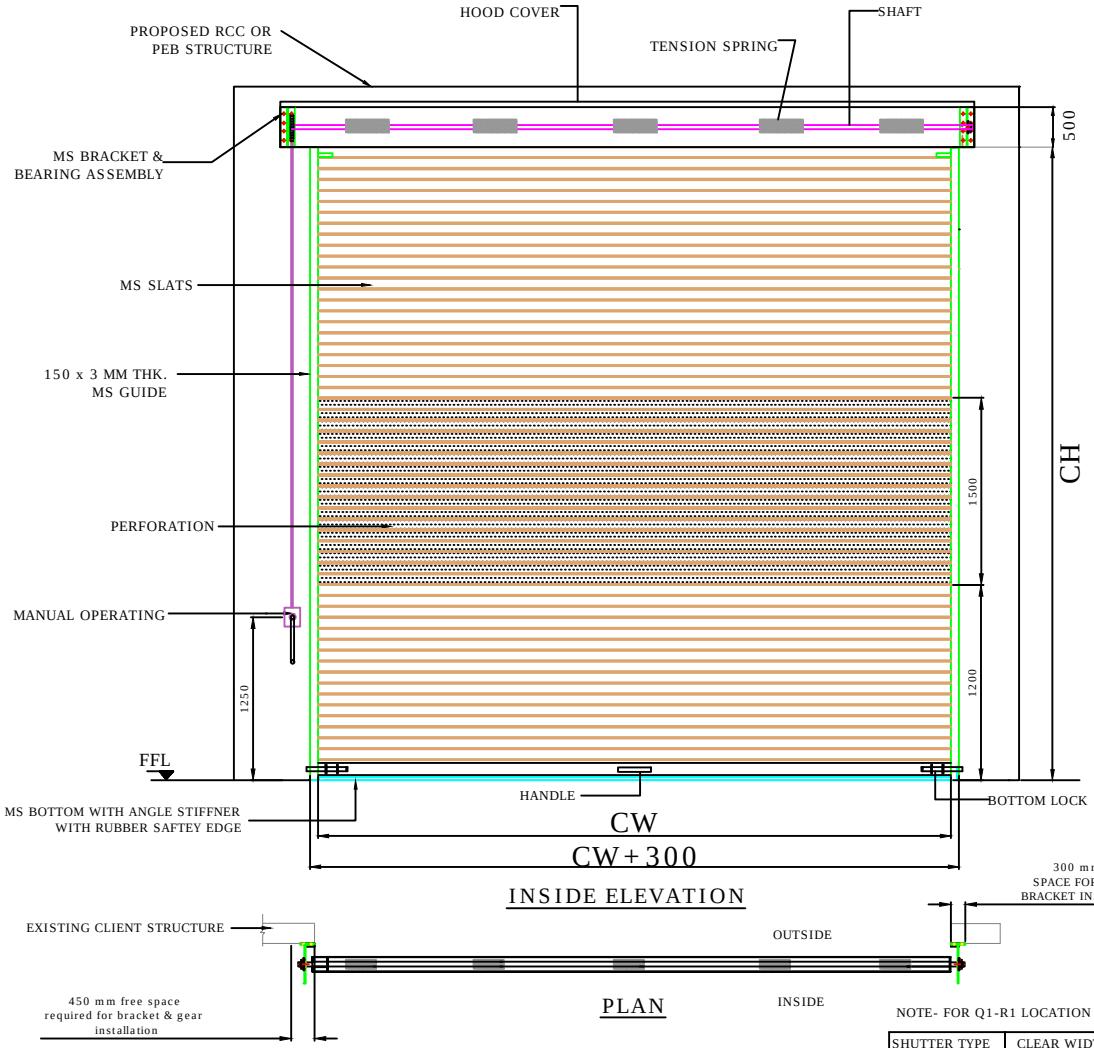


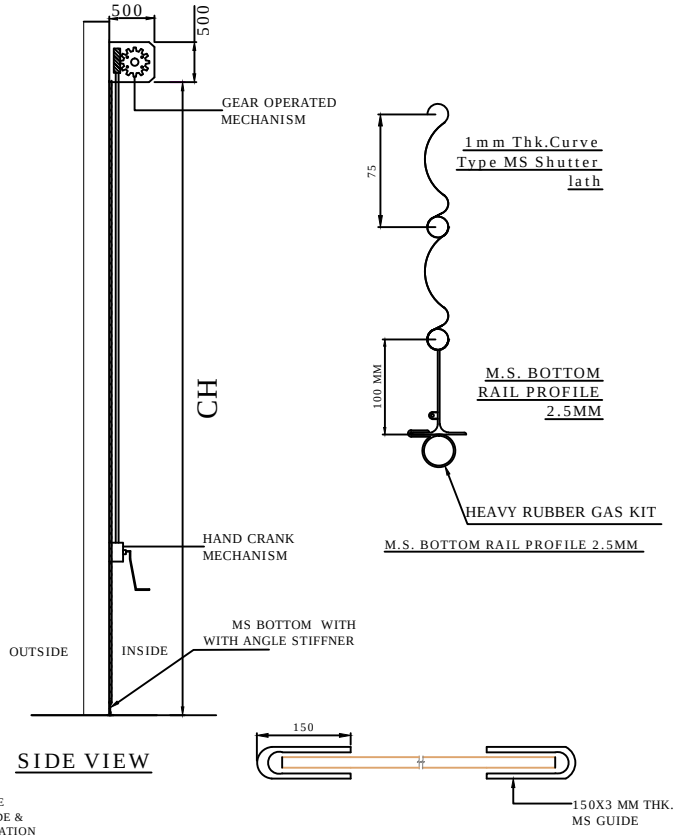

NOTE- FOR Q1-R1 LOCATION REQUIRE HORIZONTAL STRUCTUREAL SUPPORT ON COLUMN.

SHUTTER TYPE	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY	LOCATION	INSTALLATION	REMARK
RS5	4700	5000	1	F1-G1	INSIDE	REQUIRE STRUCTURE AT LEFT SIDE FOR GUIDE & BRACKET
RS5	4700	5000	1	Q1-R1	INSIDE	

REV1-COLOUR SCHEME OF ROLLING SHUTTER HAS BEEN UPDATED WITH APPROVED RAL SHADE 5012(LIGHT BLUE).

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
4700	5000	2

MATERIAL:

THICKNESS :

NOTE:
1.REQUIRED STRUCTURE FOR ROLLING SHUTTER WILL BE CLIENT'S SCOPE.
2.ONE COAT OF RED OXIDE PRIMER WILL BE GIVEN TO THE SHUTTER.
3.FOR FINAL FINISH CLIENT SHOULD MENTION COLOR SHADE FOR ROLLING SHUTTER.
4.TWO COAT OF SYNTHETIC ENAMEL PAINT APPROVED RAL 5012 LIGHT BLUE WILL BE GIVEN TO THE SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

GEAR OPERATED ROLLING SHUTTER

CLIENT'S APPROVAL :

CLIENT - SCON

PROJECT - BEKAERT INDUSTRIES PVT. LTD.

SITE LOCATION - RANJANGAON

DWG. NO. : NIHVA/16-17/200/R01

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: SURAJ	DATE: 31-03-2017
CHECK BY : SAGAR P.	DATE: 31-03-2017
APPROVED BY : R.K	DATE: 31-03-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGN IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.