




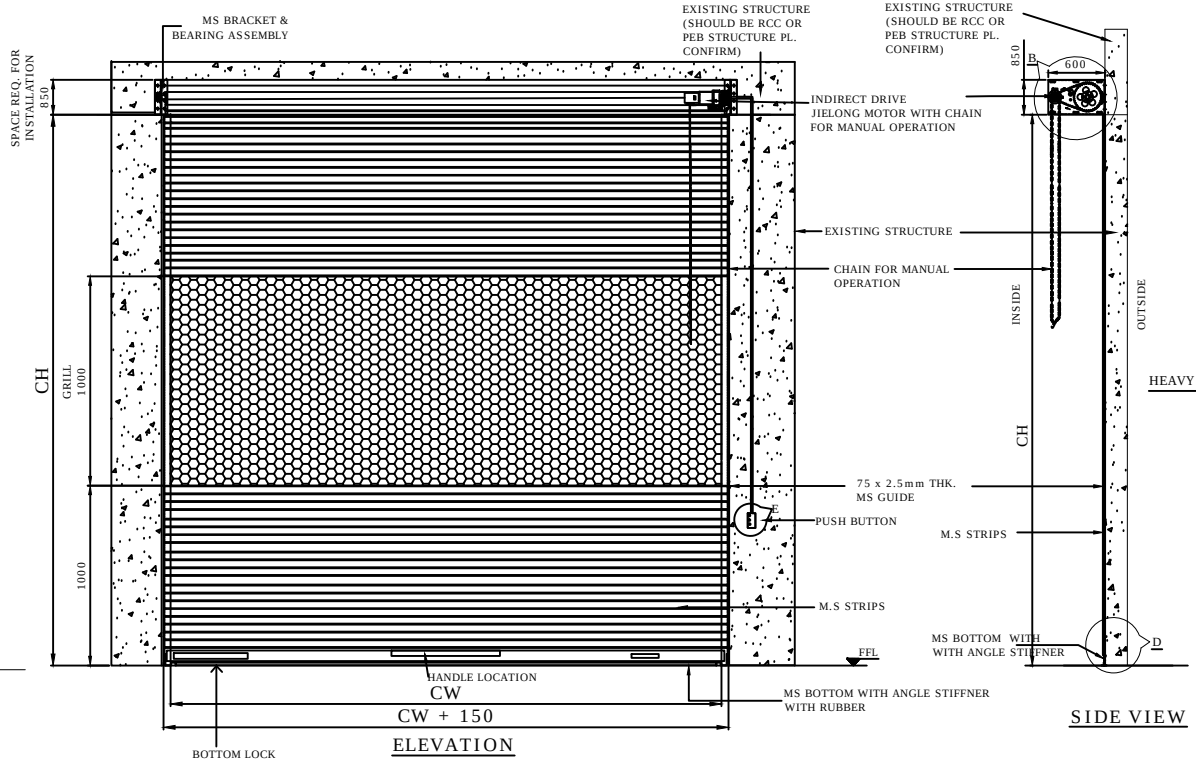


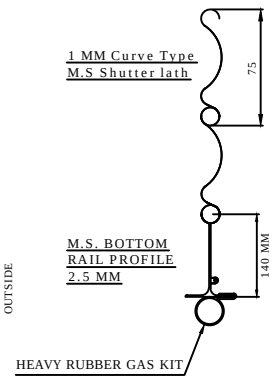


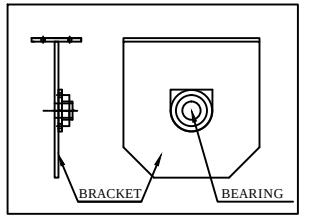

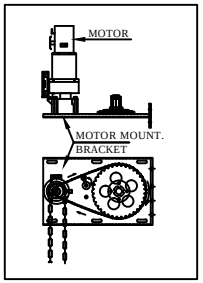

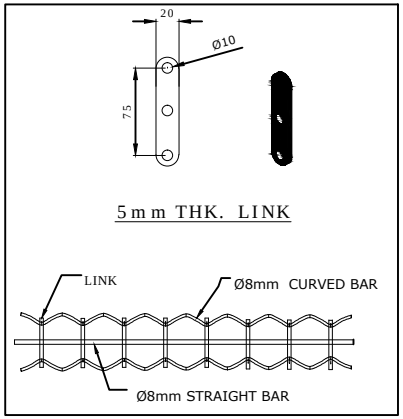

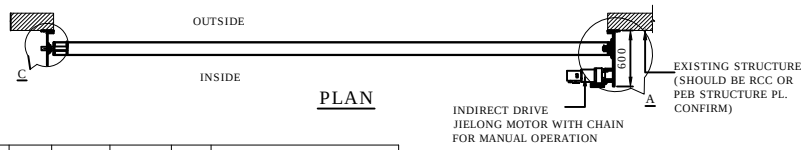

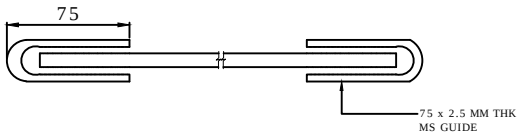

(NOTE: REQUIRED TECHANICAL STRUCTURE FOR SHUTTER IN CLIENT SCOPE)

	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
RAL 1003	3000	3500	1
RAL 2004	3850	3600	1
RAL 3000	3000	3600	7
RAL 5002	2000	3000	2
RAL 6005	4000	3660	2
RAL 7035			
RAL 9005			
RAL 9010			

SR NO	LOCATION	TYPE	CLEAR WIDTH	CLEAR HEIGHT	QTY	SIDE WALL/ SUPPORTING STRUCTURE
6	UTILITY BUILDING	RS2	3000	3600	1	BW
			3000	3600	1	BW
			3000	3600	1	BW
			3000	3600	1	BW
			3000	3600	1	BW
5	DOCK LEVELLER	RS2	3000	3600	2	PEB
4	WARE HOUSE	RS2A	3850	3600	1	PEB
3	PUMP ROOM	RS3	3000	3500	1	PEB
2	OUTGOING SHED	RS5	2000	3000	1	PEB
		RS1	4000	3660	1	PEB
1	INCOMING SHED	RS5	2000	3000	1	PEB
		RS1	4000	3660	1	PEB

REV NO	DATE	DRAWN	REMARK
R03	01.02.20	P.A	1. PUMP ROOM MRS MOUNTING CHANGE
R02	10.01.20	P.A	1. MOUNTING ADDED
R01	06.01.20	P.A	1. SIZES & QTY CHANGE.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: MOTORIZED ROLLING SHUTTER

	NAME	SIGN	DATE
DRAWN	P.A		24.12.2019
CHECK	G.J		24.12.2019
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - DESAI CONSTRUCTION

PROJECT - GE LOCOMOTIVE

SITE LOCATION - GUJARAT

DWG. NO. : NIHVA/19-20/0184/R03 REV- R03

SCALE: NTS WT: SHEET: