NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# NIHVA TECHNOLOGIES PVT. LTD.


*187, G-Block, Thermax chowk, Above Renault Showroom, MIDC*
*Chinchwad, Pune – 411019.*

Contact Person: Mr. Mayur Derle
Mob No.: 7709209333
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

**AUTOMATION SOLUTION-DIVISION**

# Ordnance Factory- Drill Unit Assembly

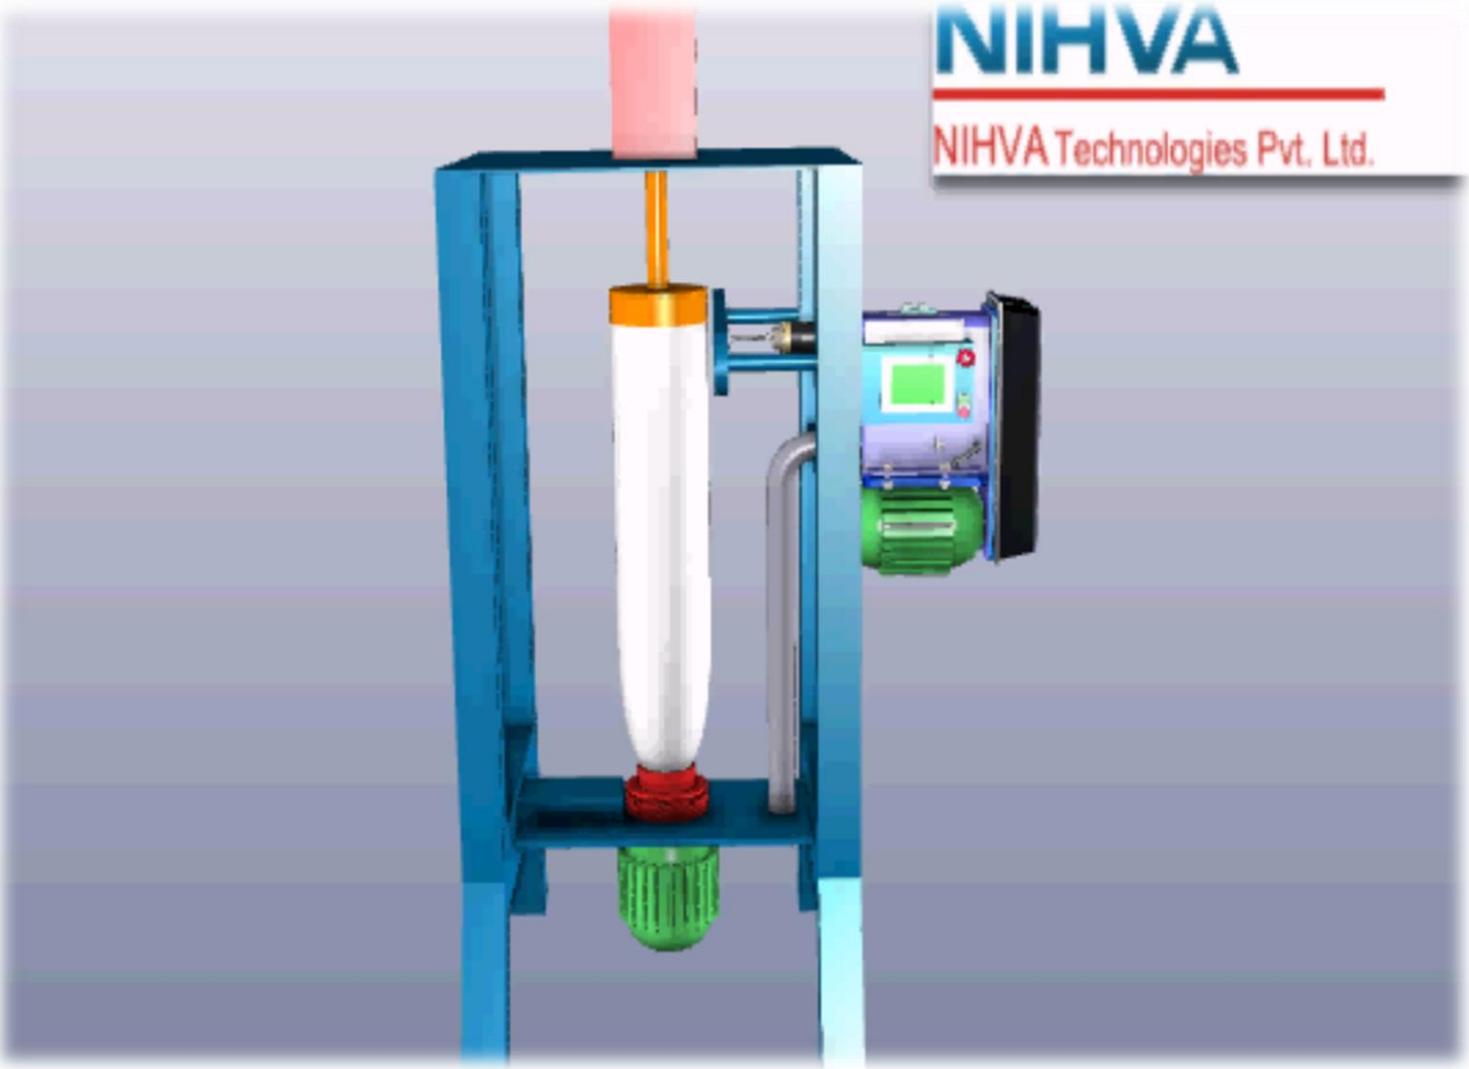

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

**Date: 27.07.2017**

**To,**

**Ordnance Factory**
**Dehuroad, Pune-412101**

**Kind Attention: Mr. T.K. PANDA**

Dear Sir,

Thank you for giving us an opportunity to participate with our offer onthe above project. We enclose here with our proposal includes:

- Requirement
- Scope ofWorks
- Drawing, Training & warranty
- Details of Application
- Commercial
- Technical Specification
- Terms & conditions

## ❖ Requirement

A. **Energy efficient Design:** The system should be energy efficient. The design shall ensure minimum possible power.

B. **Reduced Manpower:** In this process only few things are done by workers and all the heavy operation will have done by machine automatically. So this system will require minimum labour work.

## ❖ Scope of work:

The scope of work shall be exclusively on Drill Unit Assembly. This includes Pressing the bot tail unit in to shell and afterwards drilling is to be done on component after every 60o or 90o as rotation as per requirement for 6 or 4 positions respectively.

For the above scope, following set of activities are expected to be performed:

**NIHVA Automation Services Scope of supply:**

Drill Assembly Includes following:

- Design
- Manufacturing
- Successful Trails at ourend
- Dispatch at your ends.
- Installation & Commissioning @ **ORDNANCE FACTORY DEHURAOD**
- Operator & Maintenance Training.
- Warranty of the equipment for 1 year from commissioning date.
- Hard & Soft Copy of Operator & Maintenance Manual.

## ❖ Drawing:

We will issue a full set of shop drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

## ❖ Training:

After installation of the automation system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

## ❖ Warranty:

The warranty period is twelve months from the date of installation and commissioning.

If a defect arises within the warranty period stated, which is attributable to faulty design, materials or installation workmanship the product will be repaired at our discretion without charge. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

## ❖ Maintenance & Service Agreement:

We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

## ❖ Details of Application:



Concept Image of Shell

- ➢ **Components Details**

1. Work piece Description: - **155 Shell (illumination)**
2. Weight: - **Max 55 kg approx.**
3. Diameter: **-155 mm**

## ❖ Commercial:

**Drill Unit Assembly**

| Sr. No | Description | Qty | Price in INR/Each | Total Amount In INR |
|---|---|---|---|---|
| 1. | Servo Motor Drive ,Make: Panasonic | 1 SET | 9,20,000 | 9,20,000 |
| 2. | Servo Motor Drive (Rotary Axis) ,Make: Panasonic | | | |
| 3. | PLC Make : Delta | | | |
| 4 | Flameproof PLC Panel | | | |
| 5. | HMI Make: Delta | | | |
| 6. | Fixture and Assembly | | | |
| 6. | Other Panel Component | | | |
| 7. | Ball Screw and its Arrangement for Drill Unit | | | |
| 8. | Hydraulic Cylinder Press with Flameproof Power Pack | | | |
| 9. | Installation Charges | 1 | 15,000 | 15,000 |
| 10. | Transportation Charges | 1 | 5,000 | 5,000 |
| | **Total Amount** | | | 9,40,000 |

## ❖ Technical Specification:

- **Servo Motor**



- **HMI, Make: - Delta**




- **Hydraulic Cylinder**



- **PLC, Make: - Delta**



❖ **Safety features**

1. In case of sudden power cut off, system will stand as it is until reset.
2. FEA will be conducted for critical elements.
3. Secondary Safety chain catch to prevent accidental drop off.
4. Test Certificate will be provided for whole system.

❖ **Terms and Conditions:**

1. **Price** **:** Ex. Works Pune
2. **P & F Charges** **:** Included in above prices.
3. **Freight Notes** **:** Included in above prices.
4. **Delivery** **: within** 7-8 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval.
5. **Payment** **:**80% Advance along with Confirmed Purchase Order & Balance before dispatch.
6. **Insurance** **: Extra** as applicable.
7. **Tax: GST** **:** 28% on total supply value. (as applicable)
8. **Validity** **:**15 days from the date of quotation.
9. **Warranty** **:**12 Months from the date of supply.

**Please feel free to Contact Mr. Mayur Derle on 7709209333 For any further Clarification in this Concern.**

**With Best Regards**
**Pooja Badre**
**7709586333**
**For NIHVA Technologies Pvt Ltd**